

COXREELS® C Series "Combination" spring driven hose reels are a combination of two hose reels in one compact assembly. They are perfect for applications in which two sources are needed to get the job done when space is a critical factor. The single mounting base creates stability and adds to the convenience of one mounting pattern. This series is also available in air hose/electrical cord combinations.

C SERIES

Do not exceed listed hose O.D. to obtain maximum length.

| HOSE | | | | | | LESS HOSE | | SIZE INDEX |
|--|------|---------|-----|-------|------------|---------------|------------|------------|
| MODEL | I.D. | O.D. | FT. | PSI | APRX. LBS. | MODEL | APRX. LBS. | |
| LOW PRESSURE Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil. | | | | | | | | |
| C-LP-125-125 | 1/4" | 1/2" | 25 | 300 | 66 | C-LPL-125-125 | 60 | 1 |
| C-LP-135-135 | 1/4" | 1/2" | 35 | 300 | 67 | C-LPL-135-135 | 60 | 1 |
| C-LP-150-150 | 1/4" | 1/2" | 50 | 300 | 74 | C-LPL-150-150 | 64 | 1 |
| C-LP-325-325 | 3/8" | 5/8" | 25 | 300 | 67 | C-LPL-325-325 | 60 | 2 |
| C-LP-335-335 | 3/8" | 5/8" | 35 | 300 | 69 | C-LPL-335-335 | 60 | 2 |
| C-LP-350-350 | 3/8" | 5/8" | 50 | 300 | 78 | C-LPL-350-350 | 64 | 2 |
| C-LP-425-425 | 1/2" | 3/4" | 25 | 300 | 70 | C-LPL-425-425 | 60 | 2 |
| MEDIUM PRESSURE Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum Temperature 250°F. | | | | | | | | |
| C-MP-325-325 | 3/8" | 1 1/16" | 25 | 3,000 | 80 | C-MPL-325-325 | 66 | 2 |
| C-MP-335-335 | 3/8" | 1 1/16" | 35 | 3,000 | 86 | C-MPL-335-335 | 68 | 2 |
| C-MP-425-425 | 1/2" | 1 3/16" | 25 | 2,500 | 78 | C-MPL-425-425 | 64 | 2 |
| C-MP-430-430 | 1/2" | 1 3/16" | 30 | 2,500 | 84 | C-MPL-430-430 | 66 | 2 |
| HIGH PRESSURE Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum Temperature 250°F. | | | | | | | | |
| C-HP-125-125 | 1/4" | 9/16" | 25 | 5,000 | 78 | C-HPL-125-125 | 66 | 3 |
| C-HP-135-135 | 1/4" | 9/16" | 35 | 5,000 | 84 | C-HPL-135-135 | 68 | 3 |
| C-HP-325-325 | 3/8" | 1 1/16" | 25 | 4,000 | 78 | C-HPL-325-325 | 64 | 3 |
| C-HP-330-330 | 3/8" | 1 1/16" | 30 | 4,000 | 82 | C-HPL-330-330 | 66 | 3 |



C SERIES :: REEL SPECIFICATIONS

SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets (Zinc plated steel swivels on HP models)

- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Compact two reel assembly for dual hose applications, each reel operates independently
- Guide arm adjusts to wall, floor & overhead positions
- Single expanded, 1/4" steel mounting base for increased stability & space efficiency
- One mounting pattern allow 1/2 the installation time required to install 2 reels at one station
- 1" solid steel axle & lubricated precision bearings for smooth rotation

RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

ACCESSORIZE YOUR REEL :: PG 56


- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

REEL DIMENSIONS

Technical Data Sheets Available On Website

| SIZE INDEX | W | H | L | X | Y | M | N |
|------------|---------|---------|-----|----|----|----|----|
| 1 | 10 1/2" | 18 5/8" | 17" | 8" | 9" | 7" | 8" |
| 2 | 11 1/2" | 18 5/8" | 17" | 8" | 9" | 7" | 8" |
| 3 | 12 5/8" | 18 5/8" | 17" | 8" | 9" | 7" | 8" |

Overall Dimensions Base Mounting Pattern

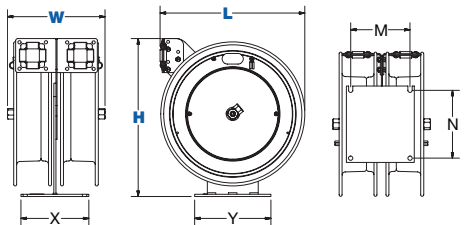

WARNING: Cancer and reproductive Harm – See page 63 for more information – www.P65Warning.ca.gov