COXREELS® 1175 Series "Competitor" hand crank and motorized hose reels, like the 1125 Series, is an industry preferred design built with a larger chassis for larger hose capacities and hose diameters. They feature a sturdy one piece all welded "A" frame base, low profile outlet riser opendrum slot design for smooth even hose wraps around the drum.

1175 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

LESS HOSE											
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL ASSEMBLY	OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D. mm	O.D. mm	LENGTH m	I.D. mm	O.D. mm	LENGTH m					
1175-6-50	25	36	15	19	32	30	25 mm F NPT 90˚	207	30	67	**1**
1175-6-100	25	36	30	19	32	46	26 mm F NPT 90˚	207	32	70	**2**
1175-6-125	25	36	38	19	32	61	27 mm F NPT 90˚	207	33	72	**3**
1175-6-135	25	36	41	19	32	53	28 mm F NPT 90˚	207	32	70	**6**
1175-6-150	25	36	46	19	32	76	29 mm F NPT 90˚	207	34	75	**4**
1175-6-200	25	36	61	19	32	91	30 mm F NPT 90˚	207	38	83	**5**

MOTOR OPTIONS

When ordering, suffix the model number with selection below. *Add 2 Kg to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. Kg*
A	AIR - #4 GAST	COMP. AIR MOTOR	4
AB	AIR - #6 GAST	COMP. AIR MOTOR	4
E	ELEC. - 12V DC	1⁄3 HP REW. REV. TYPE	6
EF	ELEC. - 24V DC	1⁄3 HP REW. REV. TYPE	6
EB	ELEC. - 24V DC	1⁄2 HP REW. REV. TYPE	12
ED	ELEC. - EXPL. PRF. - 12V DC	1⁄2 HP REW. REV. TYPE	12
EA	ELEC. - EXPL. PRF. - 115V	1⁄2 HP REW., AC REV. TYPE	12
H	HYDRAULIC	END PORTED 9⁄16-18 UNF REV.	3
C	FRONT HAND CRANK	BEVEL GEARED CRANK	1

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W mm			H mm		L mm	X mm	Y mm	Ø mm	Dw mm
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.					
1	613	559	521	664	664	610	330	511	267	191
2	714	660	622	664	664	610	432	511	267	292
3	765	711	673	664	664	610	483	511	267	343
4	816	762	724	664	664	610	533	511	267	394
5	930	876	838	664	664	610	648	511	267	508
6	930	876	838	559	581	508	648	460	267	508
	Overall Dimensions						Base		Drum	

1175 Series

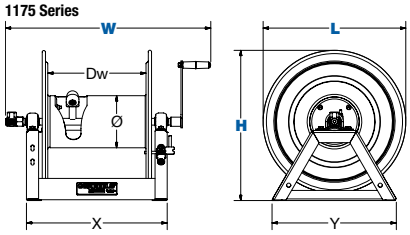

1175 Series - Motorized

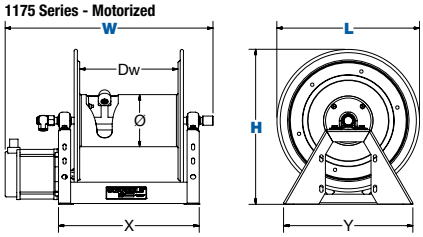

MOBILIZE YOUR REEL

Complete accessory info on page 53

COXREELS® ACCESSORY FOR 1125, 1175 & 1185 SERIES

PORTABLE HOSE REEL CART

- Steel round handle detaches for compact storage
- Steel front legs with rubber feet prevent sliding
- High grade ball bearings with hardened cup
- 13 mm diameter steel axle
- Solid 20.3 cm rubber tires

See page 53 for complete list

CARRY HANDLES

- Easily bolts to "a" frame making the reel portable
- 25 mm tube steel construction
- Powder coated crinkle black

See page 53 for complete list

1175-E Series with optional 4-way roller bracket

1175 Series

1175 SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS

DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Water Trucks
- Construction Sites
- Fire Suppression
- Chemical Fluid Transfer
- Lubricant Dispensing
- Farming
- High-Flow Watering
- Chemical Fluid Transfer

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories
- Mobilize your reel

PG 53