

COXREELS® 1125PCL Series professional-grade hand crank and motorized cord reels feature the industry preferred design including a drum-located, easy to access slip ring assembly for simple routine maintenance and a sturdy all-welded “A” frame built to efficiently handle the most demanding of tasks. The unique permanently lubricated and self-aligning pillow block bearings at each end of the drum allow smooth rotation and are specifically designed for rough, heavy-duty applications. These innovative models handle long length of 3.31 mm² Gauge or 5.26 mm² Gauge SO type power cord.

1125PCL SERIES MODELS

LESS CORD						SIZE INDEX
MODEL	12 GA (3.31 mm ²)	10 GA (5.26 mm ²)	VOLTS	AMPS	Kg.	
1125PCL-8-X	76	61	600	30	16	1
1125PCL-8M-X	76	61	600	45	16	1

- SUFFIX “X” OPTIONS

When ordering, substitute the “X” with selection below. Add 2 Kg to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. Kg.*
A	AIR - #4 GAST	COMP. AIR MOTOR	4
E	ELEC. - 12V DC	1/3 HP REV. REV. TYPE	6
EF	ELEC. - 24V DC	1/3 HP REV. REV. TYPE	6
EB	ELEC. - 24V DC	1/2 HP REV. REV. TYPE	12
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REV. REV. TYPE	12
EA	ELEC. - EXPL. PRF.	115V 1/2 HP REV., AC REV. TYPE	12
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	3
C	DIRECT HAND CRANK	STANDARD HAND CRANK	1

REEL DIMENSIONS

Technical Data Sheets Available On Website


SIZE INDEX	W mm			H mm		L mm	X mm	Y mm		Ø mm	Dw mm
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
1	546	549	479	470	486	445	340	387	406	216	203

Overall Dimensions


Base

Drum

1125PCL Series



1125PCL Series - Motorized

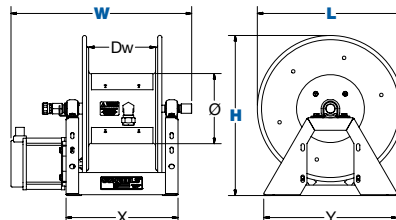

1125PCL SERIES :: REEL SPECIFICATIONS

SLIP RING

- Drum-located slip ring assembly with easy to access cover for simple routine maintenance
- Available with 30 Amps or 45 Amps, 600 Volt rated slip ring assembly (see chart)

DESIGN & STRUCTURE

- All welded steel “A” frame construction to strengthen the reel structure
- Narrow width for convenient installation in restricted spaces
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- “Cable Keeper” to prevent the lead cable from whipping or twisting
- Adjustable tension brake to prevent “free-wheeling” during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

RETRACTION

- Reliable direct gear drive on motor driven models - **NO CHAIN**
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer’s limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Power Tools
- Light Source
- General Industrial
- Manufacturing Plants & Facilities
- Service / Mechanic / Utility Vehicles
- Mining, Construction & Railroad Operations

ACCESSORIZE YOUR REEL :: PG 50

- Roller Brackets
- Assorted Reel Accessories
- Stacking Brackets

COXREELS® 1125PCL FEATURES



All Internal Components

- Drum-located slip ring assembly with easy access covers for simple routine maintenance.