

3/8" - 1/2" I.D.

HV SAFETY HOSE SERIES



EZ-P-HV Series

LG-HV Series

COXREELS® HV "High Visibility" Safety Hose Series powers up the safety of your reel. The HV Hose will add awareness and visibility to your hose creating the safest environment possible. To maximize your safety to the highest level, add EZ-Coil controlled retraction to your Coxreels. Featured on LG, P, SH, and T Series on 3/8" or 1/2" hose.

HIGH VISIBILITY SAFETY HOSE SERIES

HOSE							DIMENSIONS						
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	EZ-COIL MODELS	W	H	L	X	Y	M	N
LG SERIES							Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.						
LG-LP-320-HV	3/8"	5/8"	20	300	11	-	5 1/4"	10 5/8"	10 1/2"	4 1/16"	8 3/8"	2 1/2"	6"
P SERIES							Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.						
P-LP-325-HV	3/8"	5/8"	25	300	28	EZ-P-LP-325-HV	6 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
P-LP-350-HV	3/8"	5/8"	50	300	43	EZ-P-LP-350-HV	6 3/4"	18 5/8"	17 1/8"	6"	6"	4"	5"
P-LP-425-HV	1/2"	3/4"	25	300	44	-	7"	18 5/8"	17 1/8"	6"	6"	4"	5"
P-LP-450-HV	1/2"	3/4"	50	300	48	EZ-P-LP-450-HV	7"	18 5/8"	17 1/8"	6"	6"	4"	5"
SH SERIES							Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.						
SH-N-350-HV	3/8"	5/8"	50	300	50	EZ-SH-350-HV	8 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
SH-N-375-HV	3/8"	5/8"	75	300	68	EZ-SH-375-HV	8 1/4"	25 1/2"	24"	6"	6"	4"	5"
SH-N-3100-HV	3/8"	5/8"	100	300	71	EZ-SH-3100-HV	8 1/4"	25 1/2"	24"	6"	6"	4"	5"
SH-N-450-HV	1/2"	3/4"	50	300	54	EZ-SH-450-HV	8 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
SH-N-475-HV	1/2"	3/4"	75	300	68	EZ-SH-475-HV	8 3/4"	25 1/2"	24"	6"	6"	4"	5"
SH-N-4100-HV	1/2"	3/4"	100	300	81	EZ-SH-4100-HV	8 3/4"	25 1/2"	24"	6"	6"	4"	5"
T SERIES							Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.						
TSH-N-350-HV	3/8"	5/8"	50	300	61	EZ-TSH-350-HV	9 3/8"	21 1/4"	19 1/2"	8"	9"	7"	8"
TSH-N-375-HV	3/8"	5/8"	75	300	82	EZ-TSH-375-HV	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
TSH-N-3100-HV	3/8"	5/8"	100	300	85	EZ-TSH-3100-HV	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
TSH-N-450-HV	1/2"	3/4"	50	300	63	EZ-TSH-450-HV	9 3/8"	21 1/4"	19 1/2"	8"	9"	7"	8"
TSH-N-475-HV	1/2"	3/4"	75	300	82	EZ-TSH-475-HV	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
TSH-N-4100-HV	1/2"	3/4"	100	300	95	EZ-TSH-4100-HV	9 3/8"	25 1/2"	24"	8"	9"	7"	8"

HV SAFETY HOSE SERIES :: REEL SPECIFICATIONS

- SWIVEL**
- External fluid path with machined from solid brass 90° full-flow NPT swivel
 - Swivel Seals: NITRILE
- HOSE**
- Hybrid (PVC + Rubber) bright yellow hose with a white glossy stripe.
 - Superior visibility, increased hose flexibility, enhanced kink resistance and reduced coil memory.
 - Temperature range: -40°F to 158°F (-40°C to 70°C)
 - 300 PSI at 70°F


- DESIGN & STRUCTURE**
- Each of these reels is built of their standard series with their own unique features & benefits

- RETRACTION**
- Enclosed factory tuned & matched cartridge-style spring motor
 - On P, SH, & T Series - Controlled retraction speed up to 80% slower on EZ-COIL models. Non-corrosive stainless steel spring, pawl & zinc plated ratchet. Multi-position lock ratchet mechanism secures hose at desired length.

- SIGNATURE FEATURES**
- Professional grade heavy duty steel construction
 - Durable proprietary CPC™ powder coat process
 - Rolled edges & ribbed discs provide strength & safety
 - Leading 2-year manufacturer's limited warranty
 - Made in the U.S.A. - Sold & Supported Worldwide

- POSSIBLE FIELDS OF APPLICATION**
- Air/Water Services
 - Pneumatic Tools
 - Washdown
 - Lubrication
 - Service / Mechanic / Utility Vehicles
 - Chemical Fluid Transfer
 - General Industrial
 - Manufacturing Plants & Facilities
 - Maintenance, Repair & Operations
 - Automotive & Fleet Service Centers

- ACCESSORIZE YOUR REEL :: Pg 56**
- O-Rings & Swivels
 - Mounting Brackets
 - Hoses
 - Assorted Reel Accessories

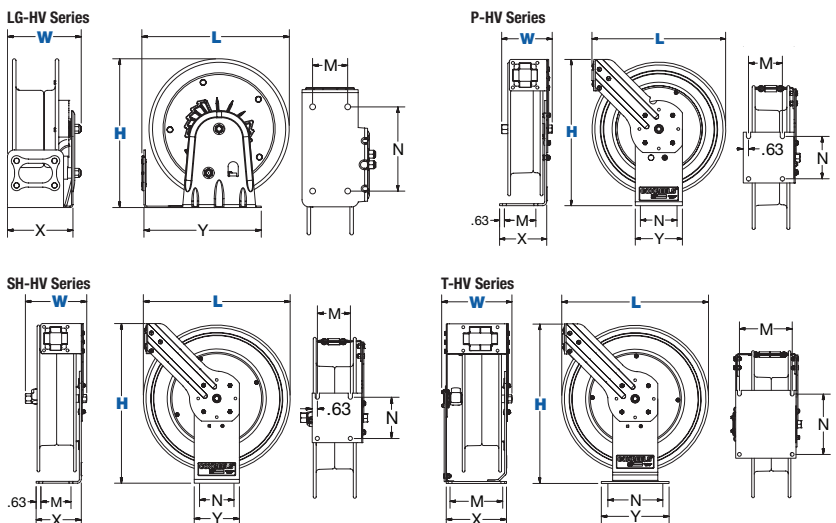

WARNING: Cancer and reproductive Harm – See page 63 for more information – www.P65Warning.ca.gov

