

HOSE, CORD & CABLE REELS

# Fire Reels

## OEM FIRE APPARATUS

**COXREELS SINCE 1923**



INDUSTRY CATALOG

# FIRE APPARATUS REELS



*IT'S NOT JUST A LABEL,*

***IT'S A BADGE OF HONOR***

Hose, cord, and cable reels are an essential component on mobile fire fighting systems. Reels are the preferred choice for hose and cord management solution in the fire and rescue industry in wildland ARFF and Fire Apparatus Applications. The rapid uncoiling systems of hose reels with the added hose control allow the firefighters and rescue teams to quickly respond and control emergency situations in a timely and safe manner.

COXREELS manufactures the most comprehensive hose, cord, and cable reel lines for all types of fire apparatus. Our reel selection includes:

- **Water Hose Reels** for fire suppression on fire vehicles including brush trucks, initial attack vehicles (IAV), ATVs, rescue units, trailers, skid mounted units, pumpers, and tankers.
- **Electric Cord Reels** mounted in fire apparatus compartments; these reels are designed for power distribution to operate electrical equipment and power tools.
- **HRT** Dual High Pressure Hydraulic Hose Reels for rescue tools on rescue vehicles.
- **Dry Chemical Systems** Twin and Single Agent Hose Reels for systems in combination of either dry chemical agent or water and AFFF (Aqueous Film Forming Foam) for CAFS systems (Compressed Aired Foam), dry chemical systems, foam trailer units, and foam skid mounted units.
- **Breathing Air / Utility Air Hose Reels** for pure breathing air or tool air systems on emergency vehicles.
- **Portable Reels** stored in fire apparatus vehicles, to transport hose or power cord to the scene of an emergency.

Our long history as a U.S manufacturer, the deep industry knowledge we have forged throughout 90 years of craftsmanship and effective product engineering has allowed us to develop several proprietary technologies and superior unique special features that became a reference in the reeling industry for safety and maintenance management.

Our product line leads the industry through performance, technology, and innovation.

***VALUE THE DIFFERENCE...***

***Make COXREELS your reel choice!***



# PROFESSIONAL GRADE FEATURES

## A HIGHER LEVEL OF STANDARDS




**CPC™ POWDER COAT**  
Our red powder coat finish is long lasting, chip resistant & rust inhibiting



**BRASS SWIVEL**  
External fluid path, machined from solid brass, full flow, swivel for simple seal maintenance



**STEEL AXLE**  
1" solid steel axle & lubricated bearings for extra strength & durability. Not a hollow tube & no fluid travels through it



**STEEL CONSTRUCTION**  
High-Quality steel construction provides superior strength and durability for heavy-duty applications in commercial and industrial settings



**COMPONENT COVER**  
External CPC powder coated steel components cover for simple slip ring routine maintenance



**EZ-COIL® SERIES**  
A patented safety system that retracts up to 80% slower than conventional reels



**CNC SPUN DISCS**  
All steel rolled edges & ribbed discs for added safety, strength & durability



**LOW PROFILE RISER**  
Low profile riser with open drum slot allows for smooth even hose wraps that will not pinch or bind your hose. **NO HUMP!**



**ALL WELDED STEEL "A" FRAME**  
All welded steel "A" frame for strength & durability. **NOT BOLTED!**




**CARTRIDGE MOTOR**  
Enclosed factory tuned & matched cartridge style motor for safe & easy replacement



**2 YEAR WARRANTY**  
Coxreels proudly stands behind our reels as they are built to last!



**USA MADE, QUALITY & SUPPORT**  
We take great pride in designing, building & supplying the world's finest reels made right here in the U.S.A.

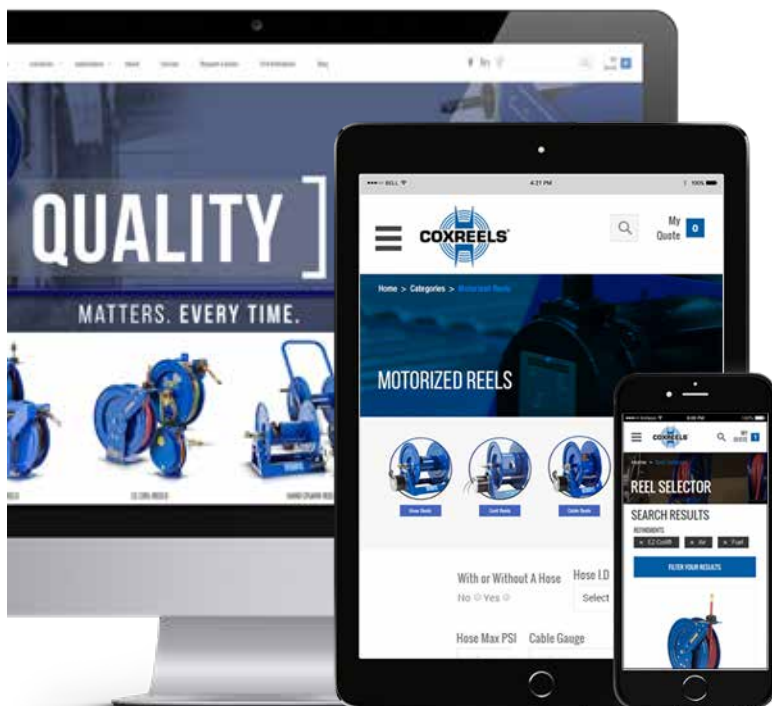

## VISIT US ONLINE

Coxreels is committed to providing our customers with the ultimate online experience as they navigate through the most complete and diverse line of hose, cord, and cable reels.

We hope that you enjoy the fresh look and feel of our updated website and find that this portal serves as a valuable resource for you!

FOLLOW US



[www.coxreels.com](http://www.coxreels.com) • 1.800.COX.REEL

OEM FIRE APPARATUS REELS



112-4-75-SS  
with "SS" Finish

**COXREELS® 100 Series** hand crank water hose reels are **lightweight, compact, versatile powder coated steel reels that perform at working pressure up to 4,000 PSI.** The simple and sturdy "U" shaped frame design makes this model the ideal reeling solution in tight spaces for skid mounted units in wildland applications such as ATVs and small brush trucks. This series is also available in stainless steel for non-corrosive performance in applications that require it. **All listed models are supplied less hose.**

### 100 SERIES

| MODEL            | LESS HOSE         |        |     |                                    |      |     | PSI   | APRX LBS. |
|------------------|-------------------|--------|-----|------------------------------------|------|-----|-------|-----------|
|                  | STANDARD CAPACITY |        |     | OPTIONAL CAPACITY Reducer Required |      |     |       |           |
|                  | I.D.              | O.D.   | FT. | I.D.                               | O.D. | FT. |       |           |
| <b>112-4-75</b>  | 1/2"              | 7/8"   | 75  | 3/8"                               | 3/4" | 100 | 4,000 | 21        |
| <b>117-4-225</b> | 1/2"              | 7/8"   | 225 | 3/8"                               | 3/4" | 315 | 4,000 | 31        |
| <b>117-4-350</b> | 1/2"              | 7/8"   | 350 | 3/8"                               | 3/4" | 450 | 4,000 | 37        |
| <b>117-5-100</b> | 3/4"              | 1 1/4" | 100 | 1/2"                               | 1"   | 150 | 4,000 | 35        |

### 100 SERIES :: REEL SPECIFICATIONS

#### STEEL REEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Professional grade, compact, and lightweight design
- Open drum design for no hassle hose wrap
- Solid one-piece, heavy gauge steel "U" shaped frame
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage
- Direct hand crank rewind

#### STAINLESS STEEL REEL UPGRADE

- Non-corrosive external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease
- "SS" Electro-polished stainless steel finish

### SS-100 SERIES STAINLESS STEEL

| MODEL               | LESS HOSE          |        |      |      |      |      | PSI   | APRX. LBS. |
|---------------------|--------------------|--------|------|------|------|------|-------|------------|
|                     | I.D.               | O.D.   | FT.  | I.D. | O.D. | FT.  |       |            |
|                     | <b>112-4-75-SS</b> | 1/2"   | 7/8" | 75   | 3/8" | 3/4" |       |            |
| <b>117-4-225-SS</b> | 1/2"               | 7/8"   | 225  | 3/8" | 3/4" | 315  | 4,000 | 31         |
| <b>117-5-100-SS</b> | 3/4"               | 1 1/4" | 100  | 1/2" | 1"   | 150  | 4,000 | 36         |

### REEL DIMENSIONS Technical Data Sheets Available On Website

| MODEL               | W       | H   | L   | X       | Y  | M       | N  | Ø      | Dw      |
|---------------------|---------|-----|-----|---------|----|---------|----|--------|---------|
| <b>112-4-75</b>     | 22 3/4" | 13" | 12" | 14"     | 6" | 10"     | 3" | 5 1/2" | 12 1/2" |
| <b>117-4-225</b>    | 22 3/4" | 18" | 17" | 14"     | 6" | 10"     | 3" | 5 1/2" | 12 1/2" |
| <b>117-4-350</b>    | 28 1/4" | 18" | 17" | 19 1/2" | 6" | 15 1/2" | 3" | 5 1/2" | 18"     |
| <b>117-5-100</b>    | 23 1/4" | 18" | 17" | 14"     | 6" | 10"     | 3" | 5 1/2" | 12 1/2" |
| <b>112-4-75-SS</b>  | 22 3/4" | 13" | 12" | 14"     | 6" | 10"     | 3" | 5 1/2" | 12 1/2" |
| <b>117-4-225-SS</b> | 22 3/4" | 18" | 17" | 14"     | 6" | 10"     | 3" | 5 1/2" | 12 1/2" |
| <b>117-5-100-SS</b> | 23 1/4" | 18" | 17" | 14"     | 6" | 10"     | 3" | 5 1/2" | 12 1/2" |

Overall Dimensions
Base
Mounting Pattern
Drum

**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



#### ADD ROLLERS

4-way enclosed pinch-proof stainless steel rollers are 1 in diameter supported by powder coated steel brackets. Weight: Add 10 lbs. to reel weight.



#### ADD PINLOCK

The spring-loaded lock pin assembly is designed to lock & secure the reel, even in mobile conditions over rough terrain.



#### STRENGTHEN DRUM WITH BRAWNY OPTION

The Brawny feature closes the drum opening, increasing the drum strength to resist potential damage from hose constriction under increased or pulsing pressure usage.



#### UPGRADE TO CAPTIVE BEARING SWIVEL

Featuring heavy duty ball bearings for smooth rotation and increased side load capabilities, our captive bearing swivel options are available in several seal configurations and material choices and can be factory installed on all of our hand crank and motorized reels lines. Also available in 304 stainless steel.



#### UPGRADE TO STAINLESS STEEL SWIVEL

Based on the upgraded medium pressure swivel, the stainless steel swivel is machined from solid 316 stainless steel and features increased wall thicknesses with upgraded seals and backup rings.



#### UPGRADE TO STAINLESS STEEL FLUID PATH

This options uses the same swivel as described in the stainless steel swivel upgrade and couples it to a upgraded 304 stainless steel plumbing axle to improve the corrosion resistance of the entire fluid path.

**COXREELS® 1125 Series**, low profile, compact, hand crank and motorized booster hose reels have the features demanded by industry professionals. The sturdy, all welded "A" frame base and compact design is ideal for restricted spaces and also well suited to complete slip-on units for use in brush and wildland firefighting vehicles including brush pick-up trucks, IAV, ATVs, rescue units, trailers. This series is available in non-corrosive stainless steel with stainless plumbing for non-corrosive performance in applications that require it. **All listed models are supplied less hose.**

## 1125 SERIES MODELS

| MODEL             | LESS HOSE    |         |     |                                |        |     | INLET SWIVEL & OUTLET RISER | PSI   |
|-------------------|--------------|---------|-----|--------------------------------|--------|-----|-----------------------------|-------|
|                   | STANDARD CAP |         |     | OPTIONAL CAP. Reducer required |        |     |                             |       |
|                   | I.D.         | O.D.    | FT. | I.D.                           | O.D.   | FT. |                             |       |
| <b>1125-5-50</b>  | 3/4"         | 1 1/4"  | 50  | 1/2"                           | 7/8"   | 100 | 3/4" F NPT                  | 3,000 |
| <b>1125-5-100</b> | 3/4"         | 1 1/4"  | 100 | 1/2"                           | 7/8"   | 200 | 3/4" F NPT                  | 3,000 |
| <b>1125-5-175</b> | 3/4"         | 1 1/4"  | 175 | 1/2"                           | 7/8"   | 325 | 3/4" F NPT                  | 3,000 |
| <b>1125-5-200</b> | 3/4"         | 1 1/4"  | 200 | 1/2"                           | 7/8"   | 450 | 3/4" F NPT                  | 3,000 |
| <b>1125-5-250</b> | 3/4"         | 1 1/4"  | 250 | 1/2"                           | 7/8"   | 500 | 3/4" F NPT                  | 3,000 |
| <b>1125-6-50</b>  | 1"           | 1 7/16" | 50  | 3/4"                           | 1 1/4" | 75  | 1" F NPT                    | 3,000 |
| <b>1125-6-75</b>  | 1"           | 1 7/16" | 75  | 3/4"                           | 1 1/4" | 120 | 1" F NPT                    | 3,000 |
| <b>1125-6-100</b> | 1"           | 1 7/16" | 100 | 3/4"                           | 1 1/4" | 150 | 1" F NPT                    | 3,000 |



SP-1125 Motorized Series with 4 way top roller

## 1125 & 1125 SS SERIES :: REEL SPECIFICATIONS

### STEEL REEL SWIVEL

- Machined solid brass 90° full-flow NPT swivel
- Swivel Seals: NITRILE AFLAS on 1" steel model
- External 90° full-flow NPT swivel with electroless nickel plated steel inlet (1" steel models)
- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated, self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation (manual rewind / STD)
- Long-handled locking pin to secure reel from rotation during transport or storage (manual rewind / STD)
- Solid steel direct hand crank with smooth round handle

### STAINLESS STEEL REEL UPGRADE

- Non-corrosive, external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease
- Choice of stainless steel finish includes:  
 "SP" Standard unpolished "as manufactured" stainless steel finish  
 "SS" Electro-polished stainless steel finish



**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

## SS 1125 SERIES STAINLESS STEEL - Hand Crank & Motor Driven

| MODEL               | LESS HOSE    |        |     |                                |      |     | INLET SWIVEL & OUTLET RISER | PSI   | APRX. LBS. |
|---------------------|--------------|--------|-----|--------------------------------|------|-----|-----------------------------|-------|------------|
|                     | STANDARD CAP |        |     | OPTIONAL CAP. Reducer required |      |     |                             |       |            |
|                     | I.D.         | O.D.   | FT. | I.D.                           | O.D. | FT. |                             |       |            |
| <b>1125-5-100-X</b> | 3/4"         | 1 1/4" | 100 | 1/2"                           | 7/8" | 200 | 3/4" F NPT                  | 3,000 | 42         |
| <b>1125-5-200-X</b> | 3/4"         | 1 1/4" | 200 | 1/2"                           | 7/8" | 450 | 3/4" F NPT                  | 3,000 | 55         |

Designate either SP or SS for choice of finish



### MOTORIZED THE REWIND OF YOUR REEL

Featuring a direct gear drive, the 1125 Series drive system is more dependable and maintenance free than a chain and sprocket. A solid steel ring gear is directly welded to the side of the disc for added rigidity and strength. Choose from several motor options shown in the table below.

SEE PAGE 17 FOR ADDITIONAL MOTOR ACCESSORIES

| SUFFIX    | TYPE                 | DESCRIPTION                 | ADD ON APX. LBS* |
|-----------|----------------------|-----------------------------|------------------|
| <b>C*</b> | FRONT HAND CRANK     | BEVEL GEARED CRANK          | 3                |
| <b>E</b>  | 12 V DC, 1/3 HP      | REVERSABLE                  | 13               |
| <b>ED</b> | 12 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSABLE | 26               |
| <b>EF</b> | 24 V DC, 1/3 HP      | REVERSABLE                  | 13               |
| <b>EB</b> | 24 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSABLE | 26               |


## TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



### 5,000 PSI HIGH PRESSURE MODELS

Upgrade to 5000 PSI with a steel ball bearing swivel. Machined from high strength steel and nickel plated for corrosion resistance, the ball bearing swivel features maximum flow and enhanced load bearing capabilities. Swivel Seals: AFLAS



### STRENGTHEN DRUM WITH BRAWNY OPTION

10 Gauge plates welded into each disc to keep them from bowing. Prevents deformations & eventual crushing of the drum that can be caused by hose pressure. The center drum has been thickened from 16GA to 14GA.



### UPGRADE TO STAINLESS STEEL

**STAINLESS STEEL SWIVEL / STAINLESS STEEL CAPTIVE BEARING SWIVEL:** the stainless steel swivel is machined from solid 304 stainless steel for increased corrosion resistance.

**STAINLESS STEEL FLUID PATH:** This option uses the same swivel as described in the stainless steel swivel upgrade and couples it to an upgraded 304 stainless steel plumbing axle to improve the corrosion resistance of the entire fluid path.



### ADD PINLOCK TO MOTORIZED MODELS

The spring-loaded lock pin assembly is designed to lock & secure the reel, even in mobile conditions over rough terrain.





# 1175 SERIES

## HAND CRANK & MOTORIZED WATER & DRY CHEMICAL HOSE REELS



SS-1175 series

**COXREELS® 1175 Series**, standard hand crank and motorized booster hose reels, is an industry preferred design built with a larger chassis for larger hose capacities. This series has the same great features as our 1125 Series. The sturdy, all welded "A" frame base with a low profile riser makes this reel the ideal solution for fire suppression on any firefighting vehicles including slip-on units, brush trucks, IAV, ARFF, rescue units, tankers and pumpers. This series is available in non-corrosive, stainless steel with stainless plumbing for non-corrosive performance in applications that require it. **All listed models are supplied less hose.**

### 1175 SERIES - ALL REELS SUPPLIED LESS HOSE

| MODEL             | STANDARD CAP |         |     | OPTIONAL CAP.<br>Reducer required |        |     | INLET SWIVEL ASSEMBLY | OUTLET RISER | PSI   | APRX. LBS. |
|-------------------|--------------|---------|-----|-----------------------------------|--------|-----|-----------------------|--------------|-------|------------|
|                   | I.D.         | O.D.    | FT. | I.D.                              | O.D.   | FT. |                       |              |       |            |
| <b>1175-6-50</b>  | 1"           | 1 7/16" | 50  | 3/4"                              | 1 1/4" | 100 | 1" F NPT 90°          | 1" F NPT     | 3,000 | 67         |
| <b>1175-6-100</b> | 1"           | 1 7/16" | 100 | 3/4"                              | 1 1/4" | 150 | 1" F NPT 90°          | 1" F NPT     | 3,000 | 70         |
| <b>1175-6-125</b> | 1"           | 1 7/16" | 125 | 3/4"                              | 1 1/4" | 200 | 1" F NPT 90°          | 1" F NPT     | 3,000 | 72         |
| <b>1175-6-135</b> | 1"           | 1 7/16" | 135 | 3/4"                              | 1 1/4" | 175 | 1" F NPT 90°          | 1" F NPT     | 3,000 | 70         |
| <b>1175-6-150</b> | 1"           | 1 7/16" | 150 | 3/4"                              | 1 1/4" | 250 | 1" F NPT 90°          | 1" F NPT     | 3,000 | 75         |
| <b>1175-6-200</b> | 1"           | 1 7/16" | 200 | 3/4"                              | 1 1/4" | 300 | 1" F NPT 90°          | 1" F NPT     | 3,000 | 83         |

### 1175 & 1175 SS SERIES :: REEL SPECIFICATIONS

- STEEL REEL**
- External fluid path with nickel plated steel 90° full-flow NPT swivel inlet
  - Swivel Seals: AFLAS
  - All welded steel "A" frame construction for superior reel structure
  - Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
  - Permanently lubricated, self-aligning pillow block bearings for trouble-free & smooth rotation
  - Adjustable tension brake to prevent "free-wheeling" during operation
  - Long-handled locking pin to secure reel from rotation during transport or storage (manual rewind / STD)
  - Solid steel, direct hand crank with smooth round handle

- STAINLESS STEEL REEL UPGRADE**
- Non-corrosive, external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
  - Swivel Seals: NITRILE Non-Toxic Food Grade Grease
  - Choice of stainless steel finish includes:
    - "-SP" Standard unpolished "as manufactured" stainless steel finish
    - "-SS" Electro-polished stainless steel finish

**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

### SS 1175 SERIES STAINLESS STEEL - Hand Crank & Motor Driven

| MODEL               | STANDARD CAP |         |     | OPTIONAL CAP.<br>Reducer required |        |     | INLET SWIVEL & OUTLET RISER | PSI   | APRX. LBS. |
|---------------------|--------------|---------|-----|-----------------------------------|--------|-----|-----------------------------|-------|------------|
|                     | I.D.         | O.D.    | FT. | I.D.                              | O.D.   | FT. |                             |       |            |
| <b>1175-6-100-X</b> | 1"           | 1 7/16" | 100 | 3/4"                              | 1 1/4" | 150 | 1" F NPT                    | 3,000 | 70         |
| <b>1175-6-200-X</b> | 1"           | 1 7/16" | 200 | 3/4"                              | 1 1/4" | 300 | 1" F NPT                    | 3,000 | 83         |

↳ Designate either SP or SS for choice of finish



### MOTORIZED THE REWIND OF YOUR REEL

Featuring a lubricated chain and a zinc plated steel sprocket, the 1175 Series drive system provides a smooth, continuous rewind on motorized reels. Choose from several motor options shown in the table below.

SEE PAGE 17 FOR ADDITIONAL MOTOR ACCESSORIES

| SUFFIX    | TYPE                 | DESCRIPTION                 | ADD ON APRX. LBS* |
|-----------|----------------------|-----------------------------|-------------------|
| <b>C</b>  | FRONT HAND CRANK     | BEVEL GEARED CRANK          | 3                 |
| <b>E</b>  | 12 V DC, 1/3 HP      | REVERSABLE                  | 13                |
| <b>ED</b> | 12 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSABLE | 26                |
| <b>EF</b> | 24 V DC, 1/3 HP      | REVERSABLE                  | 13                |
| <b>EB</b> | 24 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSABLE | 26                |

### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



**ADD 4-WAY ROLLERS**  
4-way enclosed pinch-proof stainless steel rollers are 1 in diameter supported by powder coated steel brackets. Weight: Add 10 lbs. to reel weight.



**ADD 3-WAY ROLLERS**  
3-way open spool roller assembly with 1.5 chrome-plated machined steel spools & 1.5 stainless steel tubing bottom roller & powder coated steel brackets. Weight: Add 14 lbs. to reel weight.



**UPGRADE TO STAINLESS STEEL**  
**STAINLESS STEEL CAPTIVE BEARING SWIVEL:** Featuring heavy duty ball bearings for smooth rotation and increased side load capabilities, the stainless steel swivel is machined from solid 304 stainless steel for increased corrosion resistance.  
**STAINLESS STEEL FLUID PATH:** This option uses the same swivel as described in the stainless steel captive bearing swivel upgrade and couples it to a upgraded 304 stainless steel plumbing axle to improve the corrosion resistance of the entire fluid path.



**ADD PINLOCK TO MOTORIZED MODELS**  
The spring-loaded lock pin assembly is designed to lock & secure the reel, even in mobile conditions over rough terrain.



# LARGE CAPACITY HAND CRANK & MOTORIZED WATER HOSE REELS

# 1185 SERIES

**COXREELS® 1185 Series, large capacity, hand crank and motorized water hose reels manages large diameter hose for increased volume delivery.** The sturdy all welded "A" frame base with a low profile riser makes this reel the ideal solution for foamtransfer and fire suppression applications including foam dispensing and high volume water stationary or mobile units. **All listed models are supplied less hose.**

## 1185 SERIES - ALL REELS SUPPLIED LESS HOSE

| MODEL            | STANDARD CAP     |      |     | OPTIONAL CAP.<br>Reducer required |      |     | INLET SWIVEL<br>& OUTLET<br>RISER | PSI | APRX.<br>LBS. |
|------------------|------------------|------|-----|-----------------------------------|------|-----|-----------------------------------|-----|---------------|
|                  | I.D.             | O.D. | FT. | I.D.                              | O.D. | FT. |                                   |     |               |
|                  | <b>1185-1124</b> | 1½"  | 2¼" | 50                                | 1¼"  | 1¾" |                                   |     |               |
| <b>1185-1524</b> | 1½"              | 2¼"  | 75  | 1¼"                               | 1¾"  | 100 | 1½" F NPT                         | 600 | 81            |
| <b>1185-2020</b> | 1½"              | 2¼"  | 70  | 1¼"                               | 1¾"  | 80  | 1½" F NPT                         | 600 | 70            |
| <b>1185-2024</b> | 1½"              | 2¼"  | 100 | 1¼"                               | 1¾"  | 125 | 1½" F NPT                         | 600 | 94            |
| <b>1185-2028</b> | 1½"              | 2¼"  | 125 | 1¼"                               | 1¾"  | 180 | 1½" F NPT                         | 600 | 109           |
| <b>1185-2528</b> | 1½"              | 2¼"  | 150 | 1¼"                               | 1¾"  | 220 | 1½" F NPT                         | 600 | 122           |
| <b>1185-3324</b> | 1½"              | 2¼"  | 175 | 1¼"                               | 1¾"  | 225 | 1½" F NPT                         | 600 | 154           |
| <b>1185-3328</b> | 1½"              | 2¼"  | 250 | 1¼"                               | 1¾"  | 325 | 1½" F NPT                         | 600 | 169           |



### 1185 SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with in-line electroless nickel plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE

#### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Robust, lubricated horizontal surface mount bearings for easy rotation
- Adjustable tension brake to prevent "free-wheeling" during operation (manual rewind / STD)
- Long-handled locking pin to secure reel from rotation during transport or storage (manual rewind / STD)
- Reliable chain & sprocket drive on motor driven models
- Solid steel, direct hand crank with smooth round handle

#### MOTORIZED THE REWIND OF YOUR REEL

Featuring a lubricated chain and a zinc plated steel sprocket, the 1185 Series drive system provides a smooth, continuous rewind on motorized reels. Choose from several motor options shown in the table below.



SEE PAGE 17 FOR ADDITIONAL MOTOR ACCESSORIES

| SUFFIX    | TYPE                 | DESCRIPTION                 | ADD ON APRX. LBS* |
|-----------|----------------------|-----------------------------|-------------------|
| <b>C</b>  | FRONT HAND CRANK     | BEVEL GEARED CRANK          | 3                 |
| <b>E</b>  | 12 V DC, 1/3 HP      | REVERSABLE                  | 13                |
| <b>ED</b> | 12 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSABLE | 26                |
| <b>EF</b> | 24 V DC, 1/3 HP      | REVERSABLE                  | 13                |
| <b>EB</b> | 24 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSABLE | 26                |

### REEL DIMENSIONS Technical Data Sheets Available On Website

| MODEL            | W     |       |            |                | H    | L   | X    | Y    | Ø    | Dw   |
|------------------|-------|-------|------------|----------------|------|-----|------|------|------|------|
|                  | CRANK | ELEC. | AIR / HYD. | -BUXE EQUIPPED |      |     |      |      |      |      |
| <b>1185-1124</b> | 25"   | 26½"  | 23¾"       | 26½"           | 26"  | 24" | 17"  | 22¼" | 10½" | 11½" |
| <b>1185-1524</b> | 29"   | 30½"  | 27¾"       | 30¾"           | 26"  | 24" | 21"  | 22¼" | 10½" | 15½" |
| <b>1185-2020</b> | 33½"  | 34½"  | 31¾"       | 35¾"           | 21½" | 20" | 25½" | 19½" | 10½" | 11½" |
| <b>1185-2024</b> | 33½"  | 34½"  | 31¾"       | 35¾"           | 26"  | 24" | 25½" | 22¼" | 10½" | 20"  |
| <b>1185-2028</b> | 33½"  | 34½"  | 31¾"       | 35¾"           | 30"  | 28" | 25½" | 24½" | 10½" | 20"  |
| <b>1185-2528</b> | 38½"  | 39½"  | 36¾"       | 40¾"           | 30"  | 28" | 30½" | 24½" | 10½" | 25"  |
| <b>1185-3324</b> | 46½"  | 47½"  | 44¾"       | 48¾"           | 26"  | 24" | 38½" | 22¼" | 10½" | 33"  |
| <b>1185-3328</b> | 46½"  | 47½"  | 44¾"       | 48¾"           | 30"  | 28" | 38½" | 24½" | 10½" | 33"  |

Overall Dimensions

Base

Drum



**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES

### TOP REQUESTED UPGRADES & ACCESSORIES



#### ADD 4-WAY ROLLERS

4-way enclosed pinch-proof stainless steel rollers are 1 in diameter supported by powder coated steel brackets. Weight: Add 10 lbs. to reel weight.



#### ADD 3-WAY ROLLERS

3-way open spool roller assembly with 1.5 chrome-plated machined steel spools & 1.5 stainless steel tubing bottom roller & powder coated steel brackets. Weight: Add 14 lbs. to reel weight.



#### UPGRADE TO STAINLESS STEEL

**STAINLESS STEEL CAPTIVE BEARING SWIVEL / STAINLESS STEEL IN-LINE SWIVEL:** the stainless steel swivel is machined from solid 304 stainless steel for increased corrosion resistance.

**STAINLESS STEEL FLUID PATH:** This options uses the same swivel as described in the stainless steel swivel upgrade options and couples it to a upgraded 304 stainless steel plumbing axle to improve the corrosion resistance of the entire fluid path.



#### ADD PINLOCK TO MOTORIZED MODELS

The spring-loaded lock pin assembly is designed to lock & secure the reel, even in mobile conditions over rough terrain.



# 1600 SERIES

## OEM HAND CRANK & MOTORIZED WATER HOSE REELS

**COXREELS® 1600 Series**, hand crank, and motorized water hose reels were specifically engineered with the **Original Equipment Manufacturers in mind**. This series is the most versatile in the marketplace, offering flexible configurations for many dimensions and hose capacities. The foot print of these reels is perfect for all OEM builders as they fit any allocated reel space in a variety of firefighting vehicles including brush trucks, IAV, rescue units, trailers, skid mounted units, ARFF, pumps, and tankers. **All listed models are supplied less hose.**

### 1660 MODEL

| MODEL            | Hose Cap. 1" I.D. | Optional Hose Cap. 3/4" I.D. | DIMENSIONS |           |         |         |          |         |         |         | APRX. LBS |
|------------------|-------------------|------------------------------|------------|-----------|---------|---------|----------|---------|---------|---------|-----------|
|                  |                   |                              | DW         | L         | W       |         |          | H       | X       | Y       |           |
|                  |                   |                              | DRUM WIDTH | DISC SIZE | CRANK   | ELEC.   | AIR/HYD. |         |         |         |           |
| <b>1660-0820</b> | 50'               | 60'                          | 8"         | 20"       | 23 7/8" | 21 5/8" | 20 3/8"  | 21 3/4" | 15"     | 20 1/4" | 54        |
| <b>1660-1120</b> | 75'               | 100'                         | 11.5"      | 20"       | 27 3/8" | 25 1/8" | 23 7/8"  | 21 3/4" | 18 1/2" | 20 1/4" | 60        |
| <b>1660-0824</b> |                   |                              | 8"         | 24"       | 23 7/8" | 21 5/8" | 20 3/8"  | 25 1/4" | 15"     | 23 1/4" | 67        |
| <b>1660-1520</b> | 100'              | 150'                         | 15.5"      | 20"       | 31 3/8" | 29 1/8" | 27 7/8"  | 21 3/4" | 22 1/2" | 20 1/4" | 68        |
| <b>1660-0924</b> |                   |                              | 9.5"       | 24"       | 35 3/8" | 23 1/8" | 21 7/8"  | 25 1/4" | 16 1/2" | 23 1/4" | 72        |
| <b>1660-2220</b> | 165'              | 225'                         | 20"        | 20"       | 37 7/8" | 35 5/8" | 34 3/8"  | 21 3/4" | 29"     | 20 1/4" | 89        |
| <b>1660-1524</b> |                   |                              | 15.5"      | 24"       | 31 3/8" | 29 1/8" | 27 7/8"  | 25 1/4" | 22 1/2" | 23 1/4" | 81        |
| <b>1660-0928</b> |                   |                              | 9.5"       | 28"       | 25 3/8" | 23 1/8" | 21 7/8"  | 29 1/4" | 16 1/2" | 26 1/4" | 85        |
| <b>1660-2820</b> |                   |                              | 28"        | 20"       | 43 7/8" | 41 5/8" | 40 3/8"  | 21 3/4" | 35"     | 20 1/4" | 94        |
| <b>1660-2024</b> | 200'              | 275'                         | 20"        | 24"       | 35 7/8" | 33 5/8" | 32 3/8"  | 25 1/4" | 27"     | 23 1/4" | 91        |
| <b>1660-1128</b> |                   |                              | 11.5"      | 28"       | 27 3/8" | 25 1/8" | 23 7/8"  | 29 1/4" | 18 1/2" | 26 1/4" | 88        |
| <b>1660-3320</b> | 250'              | 375'                         | 33"        | 20"       | 48 7/8" | 46 5/8" | 45 3/8"  | 21 3/4" | 40"     | 20 1/4" | 104       |
| <b>1660-2424</b> |                   |                              | 24"        | 24"       | 39 7/8" | 37 5/8" | 36 3/8"  | 25 1/4" | 31"     | 23 1/4" | 102       |
| <b>1660-1528</b> |                   |                              | 15.5"      | 28"       | 31 3/8" | 29 1/8" | 27 7/8"  | 29 1/4" | 22 1/2" | 26 1/4" | 96        |
| <b>1660-2824</b> | 300'              | 450'                         | 28"        | 24"       | 43 7/8" | 41 5/8" | 40 3/8"  | 25 1/4" | 35"     | 23 1/4" | 107       |
| <b>1660-3324</b> |                   |                              | 33"        | 24"       | 48 7/8" | 46 5/8" | 45 3/8"  | 25 1/4" | 40"     | 23 1/4" | 117       |
| <b>1660-2028</b> | 350'              | 500'                         | 20"        | 28"       | 35 7/8" | 33 5/8" | 32 3/8"  | 29 1/4" | 27"     | 26 1/4" | 106       |
| <b>1660-2228</b> |                   |                              | 400'       | 550'      | 22"     | 28"     | 37 7/8"  | 35 5/8" | 34 3/8" | 29 1/4" | 29"       |
| <b>1660-2428</b> | 450'              | 600'                         | 24"        | 28"       | 39 7/8" | 37 5/8" | 36 3/8"  | 29 1/4" | 31"     | 26 1/4" | 114       |

### 1600 SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Other Available Seals: EPDM, VITON®

#### DESIGN & STRUCTURE

- All welded hybrid frame with added bolts
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- (On hand crank models) Long-handled locking pin to secure reel from rotation during transport or storage
- Reliable chain & sprocket drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- All metal bevel crank and gear construction



Featuring a lubricated chain and a zinc plated steel sprocket, the 1600 Series drive system provides a smooth, continuous rewind on motorized reels. Choose from several motor options shown in the table below.

SEE PAGE 17 FOR ADDITIONAL MOTOR ACCESSORIES

| SUFFIX    | TYPE                 | DESCRIPTION                 | ADD ON LBS |
|-----------|----------------------|-----------------------------|------------|
| <b>C</b>  | FRONT HAND CRANK     | BEVEL GEARED CRANK          | 3          |
| <b>E</b>  | 12 V DC, 1/3 HP      | REVERSIBLE                  | 13         |
| <b>ED</b> | 12 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSIBLE | 26         |
| <b>EF</b> | 24 V DC, 1/3 HP      | REVERSIBLE                  | 13         |
| <b>EB</b> | 24 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSIBLE | 26         |

 **WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



#### ADD ROLLERS

**4-WAY ROLLERS:** 4-way enclosed pinch-proof stainless steel rollers are 1 in diameter supported by powder coated steel brackets.

**3-WAY ROLLERS:** 3-way open spool roller assembly with 1.5 chrome-plated machined steel spools & 1.5 stainless steel tubing bottom roller & powder coated steel brackets.



#### ADD UNIVERSAL ROLLERS

**4-WAY ROLLERS:** 4-way enclosed pinch-proof stainless steel rollers are 1" in diameter.

**3-WAY ROLLERS:** 3-way open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel bottom roller.

Rollers mounted on universal bracket with 4 various positions 0°, 30°, 60°, 90°. Made from steel, powder coat black.

#### UPGRADE TO STAINLESS STEEL

**STAINLESS STEEL CAPTIVE BEARING SWIVEL:** Featuring heavy duty ball bearings for smooth rotation and increased side load capabilities, the stainless steel swivel is machined from solid 304 stainless steel for increased corrosion resistance.

**STAINLESS STEEL FLUID PATH:** This options uses the same swivel as described in the stainless steel swivel upgrade and couples it to an upgraded 304 stainless steel plumbing axle to improve the corrosion resistance of the entire fluid path.

#### IDLER GEARS AVAILABLE

Reduce drum speed & increase torque. Available in three sizes : 1:2 ratio, 1:3 ratio, and 1:4 ratio, they are factory installed on the motor kits.



**COXREELS® 1600 Series**, hand crank and motorized water hose reels were specifically engineered with the Original Equipment Manufacturers in mind. This Series is the most versatile in the marketplace offering flexible configurations for many dimensions and hose capacities. The foot print of these reels is a delight for all truck builders as they fit any allocated reel space in a variety of firefighting vehicles, including pumpers and tankers. *All listed models are supplied less hose.*

## 1680 MODEL

| MODEL     | Hose Cap. 1 1/2" I.D. | Optional Hose Cap. 1/4" I.D. | DIMENSIONS |           |         |         |          |         |         |         | APRX. LBS |
|-----------|-----------------------|------------------------------|------------|-----------|---------|---------|----------|---------|---------|---------|-----------|
|           |                       |                              | LESS HOSE  |           | W       |         |          | H       | X       | Y       |           |
|           |                       |                              | DRUM WIDTH | DISC SIZE | CRANK   | ELEC.   | AIR/HYD. |         |         |         |           |
| 1680-1520 | 50'                   | 55'                          | 15.5"      | 20"       | 28 7/8" | 29 1/8" | 27 7/8"  | 21 3/4" | 22 1/2" | 20 1/4" | 68        |
| 1680-1124 |                       |                              | 11.5"      | 24"       | 21 3/8" | 21 5/8" | 20 3/8"  | 29 1/4" | 15"     | 26 1/4" | 73        |
| 1680-0828 | 70'                   | 85'                          | 8"         | 28"       | 24 7/8" | 25 1/8" | 23 7/10" | 25 1/4" | 18 1/2" | 23 1/4" | 82        |
| 1680-2220 |                       |                              | 20"        | 20"       | 35 3/8" | 35 5/8" | 34 3/8"  | 21 3/4" | 29"     | 20 1/4" | 82        |
| 1680-1324 |                       |                              | 13.5"      | 24"       | 26 7/8" | 27 1/8" | 25 7/10" | 25 1/4" | 20 1/2" | 23 1/4" | 77        |
| 1680-0928 |                       |                              | 9.5"       | 28"       | 22 7/8" | 23 1/8" | 21 7/10" | 29 1/4" | 16 1/2" | 26 1/4" | 84        |
| 1680-1524 | 85'                   | 100'                         | 15.5"      | 24"       | 28 7/8" | 29 1/8" | 27 7/10" | 25 1/4" | 22 1/2" | 23 1/4" | 81        |
| 1680-1128 |                       |                              | 11.5"      | 28"       | 24 7/8" | 25 1/8" | 23 7/10" | 29 1/4" | 18 1/2" | 26 1/4" | 88        |
| 1680-2024 | 100'                  | 130'                         | 20"        | 24"       | 33 3/8" | 33 5/8" | 32 3/8"  | 25 1/4" | 27"     | 23 1/4" | 91        |
| 1680-1328 |                       |                              | 13.5"      | 28"       | 26 7/8" | 27 1/8" | 25 7/10" | 29 1/4" | 20 1/2" | 26 1/4" | 92        |
| 1680-2224 | 125'                  | 145'                         | 22"        | 24"       | 35 3/8" | 35 5/8" | 34 3/8"  | 25 1/4" | 29"     | 23 1/4" | 95        |
| 1680-1528 |                       |                              | 15.5"      | 28"       | 28 7/8" | 29 1/8" | 27 7/10" | 29 1/4" | 22 1/2" | 26 1/4" | 96        |
| 1680-2028 | 150'                  | 175'                         | 20"        | 28"       | 33 3/8" | 33 5/8" | 32 3/8"  | 29 1/4" | 35"     | 23 1/4" | 106       |
| 1680-2824 |                       |                              | 28"        | 24"       | 41 3/8" | 41 5/8" | 40 3/8"  | 25 1/4" | 27"     | 26 1/4" | 107       |
| 1680-3324 | 200'                  | 200'                         | 33"        | 24"       | 46 3/8" | 46 5/8" | 45 3/8"  | 25 1/4" | 40"     | 23 1/4" | 117       |
| 1680-2428 |                       |                              | 24"        | 28"       | 37 3/8" | 37 5/8" | 36 3/8"  | 29 1/4" | 31"     | 26 1/4" | 114       |
| 1680-3328 | 275'                  | 350'                         | 33"        | 28"       | 46 3/8" | 46 5/8" | 45 3/8"  | 29 1/4" | 40"     | 26 1/4" | 132       |



### 1600 SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with nickel plated steel in-line full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Other Available Seals: EPDM, VITON®

#### DESIGN & STRUCTURE

- All welded hybrid frame with added bolts
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- (On hand crank models) Long-handled locking pin to secure reel from rotation during transport or storage
- Reliable chain & sprocket drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- All metal bevel crank and gear construction

WATER



Featuring a lubricated chain and a zinc plated steel sprocket, the 1600 Series drive system provides a smooth, continuous rewind on motorized reels. Choose from several motor options shown in the table below.

SEE PAGE 17 FOR ADDITIONAL MOTOR ACCESSORIES

| SUFFIX    | TYPE                 | DESCRIPTION                 | ADD ON LBS |
|-----------|----------------------|-----------------------------|------------|
| <b>C</b>  | FRONT HAND CRANK     | BEVEL GEARED CRANK          | 3          |
| <b>E</b>  | 12 V DC, 1/3 HP      | REVERSIBLE                  | 13         |
| <b>ED</b> | 12 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSIBLE | 26         |
| <b>EF</b> | 24 V DC, 1/3 HP      | REVERSIBLE                  | 13         |
| <b>EB</b> | 24 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSIBLE | 26         |



**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

## TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



#### ADD ROLLERS

**4-WAY ROLLERS:** 4-way enclosed pinch-proof stainless steel rollers are 1 in diameter supported by powder coated steel brackets.

**3-WAY ROLLERS:** 3-way open spool roller assembly with 1.5 chrome-plated machined steel spools & 1.5 stainless steel tubing bottom roller & powder coated steel brackets.



#### ADD UNIVERSAL ROLLERS

**4-WAY ROLLERS:** 4-way enclosed pinch-proof stainless steel rollers are 1" in diameter.

**3-WAY ROLLERS:** 3-way open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel bottom roller.

Rollers mounted on universal bracket with 4 various positions 0°, 30°, 60°, 90°. Made from steel, powder coat black.

#### UPGRADE TO STAINLESS STEEL

**STAINLESS STEEL CAPTIVE BEARING SWIVEL:** Featuring heavy duty ball bearings for smooth rotation and increased side load capabilities, the stainless steel swivel is machined from solid 304 stainless steel for increased corrosion resistance.

**STAINLESS STEEL FLUID PATH:** This option uses the same swivel as described in the stainless steel swivel upgrade and couples it to a upgraded 304 stainless steel plumbing axle to improve the corrosion resistance of the entire fluid path.

#### IDLER GEARS AVAILABLE

Reduce drum speed & increase torque. Available in three sizes : 1:2 ratio, 1:3 ratio, and 1:4 ratio, they are factory installed on the motor kits.









# PC<sup>10</sup> SERIES

## COMPACT SPRING DRIVEN POWER CORD & LIGHT REELS

**COXREELS® PC<sup>10</sup> Series spring driven power cord Series is a unique compact model.** This ground-breaking design sets a new bar as the ideal cord management solution capable of fulfilling any fire apparatus application where space is limited. The condensed mounting patterns and small foot print make this reel the perfect fit for compartment mounting to power electrical equipment and tools on fast attack and rescue units.



**PC<sup>10</sup> SERIES :: REEL SPECIFICATIONS** Listed† :: Accessories only

### SLIP RING

- External, heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 25AMP / 120V rated slip ring
- Include 5' lead cable & grounding plug (except on less cord models)

### DESIGN & STRUCTURE

- Selection of electrical accessories
- Compact & lightweight spring driven cord reel save space & facilitate workplace organization
- CoxComposite™ grommet with continuous radius design that does not pinch or catch the cord during operation
- Solid, one-piece, 12GA steel base & support post for maximum stability
- ½" solid steel axle & lubricated precision bearings for smooth rotation
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive CoxComposite™ ratchet hub with self lubricating bronze bearings secures cord at desired length

**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

## PC<sup>10</sup> SERIES

Receptacle End Plug End

|   |  | CORD         |                |          |      |       |      |            | SIZE INDEX |
|---|--|--------------|----------------|----------|------|-------|------|------------|------------|
| MODEL   | ACCESSORY                                    | INLET OUTLET | AWG / NO COND. | CORD FT. | TYPE | VOLTS | AMPS | APRX. LBS. |            |
| <b>FOR INDOOR USE ONLY!</b> All models rated at 115 volts, 60 hz single phase only. |  |              |                |          |      |       |      |            |            |
| <b>PC10-3016-A†</b>   | Single Industrial Receptacle†                |              | 16 / 3         | 30       | SJO  | 115   | 13   | 14         | <b>1</b>   |
| <b>PC10-3012-A†</b>   | Single Industrial Receptacle†                |              | 12 / 3         | 30       | SJO  | 115   | 20   | 17         | <b>1</b>   |
| <b>PC10-3012-B†</b>   | Quad "4 Plug" Industrial Receptacle†         |              | 12 / 3         | 30       | SJO  | 115   | 20   | 18         | <b>1</b>   |
| <b>PC10-3016-F†</b>   | Duplex G.F.C.I. Metal Industrial Receptacle† |              | 16 / 3         | 30       | SJO  | 115   | 13   | 16         | <b>1</b>   |
| <b>PC10-3012-F†</b>   |  |              | 12 / 3         | 30       | SJO  | 115   | 20   | 19         | <b>1</b>   |
| <b>PC10-3016-X</b>  | With Cord, Less Accessory                    |              | 16 / 3         | 30       | SJO  | 300   | 13   | 14         | <b>1</b>   |
| <b>PC10-3012-X</b>  |  |              | 12 / 3         | 30       | SJO  | 300   | 20   | 18         | <b>1</b>   |
| <b>PC10-3016-4</b>  | With Cord, Less Accessory                    |              | 16 / 4         | 30       | SJO  | 300   | 10   | 14         | <b>1</b>   |
| <b>PC10L-3016</b>   | Less Cord, Less Accessory                    |              | 16 / 3         | 30*      | SJO  | 300   | 25   | 11         | <b>1</b>   |
| <b>PC10L-3012</b>   |  |              | 12 / 3         | 30*      | SJO  | 300   | 25   | 11         | <b>1</b>   |

### REEL DIMENSIONS

Technical Data Sheets Available On Website

| SIZE INDEX | W                  | H    | L    | X    | Y   | M                | N  |
|------------|--------------------|------|------|------|-----|------------------|----|
| <b>1</b>   | 7¾"                | 10⅝" | 10½" | 4⅝"  | 8⅝" | 2½"              | 6" |
|            | Overall Dimensions |      |      | Base |     | Mounting Pattern |    |



### END USER CAUTION STATEMENTS

- Cord AWG, length, insulation rating, as well as single or multi-phase electrical service must be considered in determining the power rating for each reel. End use application must not exceed the lowest rated component (reel or cord). End user is responsible for determining and ensuring compliance to national and local codes as required.
- Disconnect power source from reel while unspooling / spooling cord.
- Cord should be completely unspooled from the reel when energized. Otherwise follow NEC ampacity derating factors in 310.15(B)(3)(a) where "# current carrying conductors in the service cord" X "#cord layers on the reel" = "# current carrying conductors" in a raceway. Apply the appropriate derating factor to the cord ampacity listed in 310.15(B)(16).

## TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



### UPGRADE YOUR LEAD CABLE

Upgrade the reach of your reel by requesting a 10' lead cable instead of the standard 5'.



### ORDER LIGHT MODELS

- E SUFFIX: Caged drop light with tool tap plug.
- H SUFFIX: Industrial duty LED light 6X 3W HO
- K SUFFIX: Industrial duty LED light 12X 1W SMD
- M SUFFIX: Industrial duty LED light 8W COB





**COXREELS®** Air Series hand crank and motorized hose reels come equipped with stainless steel air path and stainless steel swivels with non-toxic, food grade grease, ensuring clean, non-contaminated, safe and reliable transfer of breathing air and utility air. This series is perfect for both low pressure and high pressure breathing air and utility air systems on emergency vehicles including EMS vehicles, and rescue units. *All listed models are supplied less hose.*



1125-E Breathing Air

1125 Utility Air

## 1125 BREATHING AIR SERIES

| LESS HOSE         |              |      |     |                                   |      |     |                             |       |            |
|-------------------|--------------|------|-----|-----------------------------------|------|-----|-----------------------------|-------|------------|
| MODEL             | STANDARD CAP |      |     | OPTIONAL CAP.<br>Reducer required |      |     | INLET SWIVEL & OUTLET RISER | PSI   | APRX. LBS. |
|                   | I.D.         | O.D. | FT. | I.D.                              | O.D. | FT. |                             |       |            |
| <b>1125P-4-6</b>  | 1/2"         | 7/8" | 100 | 3/8"                              | 3/4" | 140 | 1/2" F NPT                  | 6,000 | 36         |
| <b>1125P-4-8</b>  | 1/2"         | 7/8" | 150 | 3/8"                              | 3/4" | 200 | 1/2" F NPT                  | 6,000 | 37         |
| <b>1125P-4-12</b> | 1/2"         | 7/8" | 200 | 3/8"                              | 3/4" | 300 | 1/2" F NPT                  | 6,000 | 39         |

## 1125 UTILITY AIR SERIES

| LESS HOSE         |              |      |     |                                   |      |     |                             |       |            |
|-------------------|--------------|------|-----|-----------------------------------|------|-----|-----------------------------|-------|------------|
| MODEL             | STANDARD CAP |      |     | OPTIONAL CAP.<br>Reducer required |      |     | INLET SWIVEL & OUTLET RISER | PSI   | APRX. LBS. |
|                   | I.D.         | O.D. | FT. | I.D.                              | O.D. | FT. |                             |       |            |
| <b>1125-4-100</b> | 1/2"         | 7/8" | 100 | 3/8"                              | 3/4" | 140 | 1/2" F NPT                  | 3,000 | 36         |
| <b>1125-4-200</b> | 1/2"         | 7/8" | 200 | 3/8"                              | 3/4" | 300 | 1/2" F NPT                  | 3,000 | 39         |
| <b>1125-4-325</b> | 1/2"         | 7/8" | 325 | 3/8"                              | 3/4" | 450 | 1/2" F NPT                  | 3,000 | 48         |
| <b>1125-4-450</b> | 1/2"         | 7/8" | 450 | 3/8"                              | 3/4" | 625 | 1/2" F NPT                  | 3,000 | 52         |
| <b>1125-4-500</b> | 1/2"         | 7/8" | 500 | 3/8"                              | 3/4" | 700 | 1/2" F NPT                  | 3,000 | 58         |

### AIR SERIES :: REEL SPECIFICATIONS

#### SWIVEL

##### BREATHING AIR

- Non-corrosive, stainless steel air/fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease

##### UTILITY AIR

- External fluid path with machined solid brass 90° full-flow NPT swivel (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE

#### DESIGN & STRUCTURE

- Safely store respiratory or utility air hose lines for low or high pressure breathing air systems or tool applications
- Safely store any hose requiring sanitized & non-contaminated fluid transfer application
- All welded steel "A" frame construction for superior reel structure
- Exclusive, low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation (manual rewind / STD)
- Long-handled locking pin to secure reel from rotation during transport or storage (manual rewind / STD)
- Reliable, direct gear drive on motor driven models providing quiet & smooth retraction - **NO CHAIN**
- Solid steel, direct hand crank with smooth round handle
- See Motor Options Chart

#### MOTORIZE THE REWIND OF YOUR REEL

Featuring a direct gear drive, the 1125 Series drive system is more dependable and maintenance free than a chain and sprocket. A solid steel ring gear is directly welded to the side of the disc for added rigidity and strength. Choose from several motor options shown in the table below.

SEE PAGE 17 FOR ADDITIONAL MOTOR ACCESSORIES



| SUFFIX    | TYPE                 | DESCRIPTION                 | ADD ON LBS |
|-----------|----------------------|-----------------------------|------------|
| <b>C</b>  | FRONT HAND CRANK     | BEVEL GEARED CRANK          | 3          |
| <b>E</b>  | 12 V DC, 1/3 HP      | REVERSIBLE                  | 13         |
| <b>ED</b> | 12 V DC, 1/2 HP EXP. | EXPLOSION PROOF, REVERSIBLE | 26         |
| <b>EF</b> | 24 V DC, 1/3 HP      | REVERSIBLE                  | 13         |

### REEL DIMENSIONS Technical Data Sheets Available On Website

| MODEL             | W                     |            | H              |         | L       | X       | Y              |       | M        | N   | Ø      | Dw  |
|-------------------|-----------------------|------------|----------------|---------|---------|---------|----------------|-------|----------|-----|--------|-----|
|                   | CRANK / ELEC / SPRING | AIR / HYD. | CRANK / SPRING | MOTOR   |         |         | CRANK / SPRING | MOTOR |          |     |        |     |
| <b>1125P-4-6</b>  | 19 3/4"               | 17"        | 18 5/8"        | 19 1/4" | 17 5/8" | 11 3/8" | 15 3/8"        | 16"   | 9 7/16"  | 10" | 6 1/4" | 6"  |
| <b>1125P-4-8</b>  | 21 3/4"               | 19"        | 18 5/8"        | 19 1/4" | 17 5/8" | 13 3/8" | 15 3/8"        | 16"   | 11 7/16" | 10" | 6 1/4" | 8"  |
| <b>1125P-4-12</b> | 25 3/4"               | 23"        | 18 5/8"        | 19 1/4" | 17 5/8" | 17 3/8" | 15 3/8"        | 16"   | 15 7/16" | 10" | 6 1/4" | 12" |
| <b>1125-4-100</b> | 19 1/2"               | 17"        | 18 3/4"        | 19 1/4" | 17 5/8" | 11 3/8" | 15 3/8"        | 16"   | 9 7/16"  | 10" | 6 1/4" | 6"  |
| <b>1125-4-200</b> | 25 1/2"               | 23"        | 18 3/4"        | 19 1/4" | 17 5/8" | 17 3/8" | 15 3/8"        | 16"   | 15 7/16" | 10" | 6 1/4" | 12" |
| <b>1125-4-325</b> | 31 1/2"               | 29"        | 18 3/4"        | 19 1/4" | 17 5/8" | 23 3/8" | 15 3/8"        | 16"   | 21 7/16" | 10" | 6 1/4" | 18" |
| <b>1125-4-450</b> | 37 1/2"               | 35"        | 18 3/4"        | 19 1/4" | 17 5/8" | 29 3/8" | 15 3/8"        | 16"   | 27 7/16" | 10" | 6 1/4" | 24" |
| <b>1125-4-500</b> | 41 1/2"               | 39"        | 18 3/4"        | 19 1/4" | 17 5/8" | 33 3/8" | 15 3/8"        | 16"   | 31 7/16" | 10" | 6 1/4" | 28" |

Overall Dimensions

Base

Mounting Pattern

Drum

### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 16 FOR ADDITIONAL ACCESSORIES



#### ADD ROLLERS

**4-WAY ROLLERS:** 4-way enclosed pinch-proof stainless steel rollers are 1 in diameter supported by powder coated steel brackets.

**3-WAY ROLLERS:** 3-way open spool roller assembly with 1.5 chrome-plated machined steel spools & 1.5 stainless steel tubing bottom roller & powder coated steel brackets.



#### ADD PINLOCK TO MOTORIZED MODELS

The spring-loaded lock pin assembly is designed to lock & secure the reel, even in mobile conditions over rough terrain.







**COXREELS® 112Y Series portable hand crank reels are lightweight, compact, versatile reels to store and maintain hoses or cords.** The standard 112Y reels feature a sturdy “U” shaped frame for storage only. The 112Y-CM has a one-piece 1” steel tube frame structure and is portable. Stored in fire vehicles, this Series allow firefighters to transport hose or power cord reels on any fire apparatus. **All listed models are supplied less hose and less cord.**



## 112Y SERIES MODELS

| MODEL          | CABLE I.D.*   |      |      |      | HOSE I.D. |      | PSI   | APRX. LBS. |
|----------------|---------------|------|------|------|-----------|------|-------|------------|
|                | 8/3           | 10/3 | 12/3 | 16/3 | 3/8"      | 1/2" |       |            |
|                | <b>112Y-4</b> | 40   | 75   | 150  | 300       | 50   |       |            |
| <b>112Y-8</b>  | 80            | 135  | 300  | *    | 100       | 55   | 4,000 | 14         |
| <b>112Y-12</b> | 150           | 225  | *    | *    | 150       | 75   | 4,000 | 20         |

\*Cable length based on SJ cord type

## 112Y-CM SERIES MODELS - CADDY MOUNT

| MODEL             | CABLE I.D.*      |      |      |      | HOSE I.D. |      | PSI   | APRX. LBS. |
|-------------------|------------------|------|------|------|-----------|------|-------|------------|
|                   | 8/3              | 10/3 | 12/3 | 16/3 | 3/8"      | 1/2" |       |            |
|                   | <b>112Y-8-CM</b> | 80   | 135  | 300  | *         | 100  |       |            |
| <b>112Y-12-CM</b> | 150              | 225  | *    | *    | 150       | 75   | 4,000 | 19         |

\*Cable length based on SJ cord type

### 112Y SERIES :: REEL SPECIFICATIONS

#### OPEN PORT


- Compact and lightweight hand crank reels to store and maintain hose, cord, cable, wire, rope, tape, chain, and more
- Open drum design for no hassle hose wrap
- Open port for easy pass through for any type of hose, cord, or cable
- Hose, cord, or cable not included

#### DESIGN & STRUCTURE

- Solid, one-piece 10GA steel “U” shaped frame
- Base has holes for temporary or permanent installation
- Adjustable tension brake to prevent “free-wheeling” during operation, transport or storage
- (On 112Y-CM only) Control bar prevents hose, cord or cable from slipping off the discs
- (On 112Y-CM only) High quality one-piece 1” steel tube frame structure
- (On 112Y-CM only) “Caddy Mount” offers convenient portability
- Direct, hand crank rewind

### REEL DIMENSIONS Technical Data Sheets Available On Website

| SIZE INDEX        | W                                | H                                | L   | X                                | Y                                | M                                | N                               | Ø                               | Dw                               |
|-------------------|----------------------------------|----------------------------------|-----|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| <b>112Y-4</b>     | 12 <sup>1</sup> / <sub>4</sub> " | 13 <sup>1</sup> / <sub>8</sub> " | 12" | 6"                               | 6"                               | 4"                               | 3"                              | 5 <sup>1</sup> / <sub>2</sub> " | 4 <sup>1</sup> / <sub>2</sub> "  |
| <b>112Y-8</b>     | 15 <sup>3</sup> / <sub>4</sub> " | 13 <sup>1</sup> / <sub>8</sub> " | 12" | 9 <sup>1</sup> / <sub>2</sub> "  | 6"                               | 5 <sup>1</sup> / <sub>2</sub> "  | 3"                              | 5 <sup>1</sup> / <sub>2</sub> " | 8"                               |
| <b>112Y-12</b>    | 20 <sup>1</sup> / <sub>4</sub> " | 13 <sup>1</sup> / <sub>8</sub> " | 12" | 14"                              | 6"                               | 10"                              | 3"                              | 5 <sup>1</sup> / <sub>2</sub> " | 12 <sup>1</sup> / <sub>2</sub> " |
| <b>112Y-8-CM</b>  | 16 <sup>3</sup> / <sub>8</sub> " | 14 <sup>3</sup> / <sub>4</sub> " | 13" | 11 <sup>1</sup> / <sub>2</sub> " | 10 <sup>5</sup> / <sub>8</sub> " | 10 <sup>1</sup> / <sub>2</sub> " | 5 <sup>1</sup> / <sub>4</sub> " | 5 <sup>1</sup> / <sub>2</sub> " | 8"                               |
| <b>112Y-12-CM</b> | 20 <sup>7</sup> / <sub>8</sub> " | 14 <sup>3</sup> / <sub>4</sub> " | 13" | 16"                              | 10 <sup>5</sup> / <sub>8</sub> " | 15"                              | 5 <sup>1</sup> / <sub>4</sub> " | 5 <sup>1</sup> / <sub>2</sub> " | 12 <sup>1</sup> / <sub>2</sub> " |

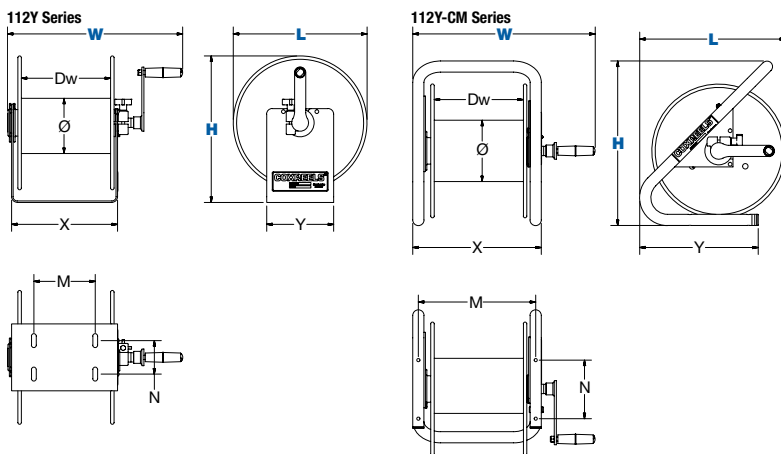

**WARNING:** Cancer and reproductive Harm – See page 19 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

# ACCESSORIES OEM FIRE APPARATUS REELS

## 4-WAY ROLLER BRACKETS



**Top Rewind**  
4-way enclosed, pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets. Specify drum width. Weight: 10 lbs. For 1-1/2" in diameter, consult factory.

| PART NO.                         | 1125 | 1175 | 1185 | 1275 | 1600 |
|----------------------------------|------|------|------|------|------|
| <b>15353*</b>                    | •    |      |      | •    |      |
| <b>15355*</b><br>1275W-C         |      |      |      | •    |      |
| <b>15357*</b>                    | •    |      |      |      |      |
| <b>15369*</b><br>24" disc size   |      |      | •    |      |      |
| <b>15369-1*</b><br>28" disc size |      |      | •    |      |      |
| <b>16901</b><br>20" disc size    |      |      |      |      | •    |
| <b>16902</b><br>24" disc size    |      |      |      |      | •    |
| <b>16903</b><br>28" disc size    |      |      |      |      | •    |
| <b>15354*</b>                    | •    |      |      | •    |      |
| <b>15037*</b>                    |      | •    |      |      |      |
| <b>15370-1*</b>                  |      |      | •    |      |      |
| PART OF THE FRAME                |      |      |      |      | •    |
| CONSULT FACTORY                  | •    | •    | •    | •    | •    |
| <b>16930</b><br>20" disc size    |      |      |      |      | •    |
| <b>16931</b><br>24" disc size    |      |      |      |      | •    |
| <b>16932</b><br>28" disc size    |      |      |      |      | •    |




**Bottom Rewind**  
4-way enclosed, pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets. Specify drum width. Weight: 10 lbs. For 1-1/2" in diameter, consult factory.



**4-way Roller**  
4-way enclosed, pinch-proof stainless steel rollers are 1" in diameter. For 1-1/2" in diameter, consult factory.



**Universal Roller 4-Way**  
4-way enclosed pinch-proof stainless steel rollers are 1" or 1-1/2" in diameter. Mounted on universal bracket with 4 various positions 0°, 30°, 60°, 90°. Made from steel, powder coat black. For 1-1/2" in diameter, consult factory.



\*Add drum width dimension as the suffix to the part number  
EXAMPLE: An 1125-4-200 reel drum width is 12". Order part number: 15353-12

## 3-WAY ROLLER BRACKET



**Top Rewind**  
3-way open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel tubing bottom roller and powder coated steel brackets. Specify drum width. Weight: 14 lbs.



**Bottom Rewind**  
3-way open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel tubing bottom roller and powder coated steel brackets. Specify drum width. Weight: 14 lbs.



**3-Way Roller**  
3-way, open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel tubing bottom roller.



**Universal Roller 3-Way**  
3-way open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel bottom roller. Mounted on universal bracket with 4 various positions 0°, 30°, 60°, 90°. Made from steel, powder coat black. Mount multiple roller guides for dual direction payout.



| PART NO.                       | 1125 | 1175 | 1185 | 1275 | 1600 |
|--------------------------------|------|------|------|------|------|
| <b>15359*</b>                  | •    |      |      | •    |      |
| <b>15360*</b><br>24" disc size |      |      | •    | •    |      |
| <b>15361*</b><br>28" disc size |      |      | •    |      |      |
| <b>16907</b><br>20" disc size  |      |      |      |      | •    |
| <b>16908</b><br>24" disc size  |      |      |      |      | •    |
| <b>16909</b><br>28" disc size  |      |      |      |      | •    |
| <b>15362*</b>                  | •    |      |      | •    |      |
| <b>15363*</b><br>24" disc size |      | •    | •    |      |      |
| <b>15364*</b><br>28" disc size |      |      | •    |      |      |
| <b>16553-dW</b>                |      |      |      |      | •    |
| CONSULT FACTORY                | •    | •    | •    | •    | •    |
| <b>16933</b><br>20" disc size  |      |      |      |      | •    |
| <b>16934</b><br>24" disc size  |      |      |      |      | •    |
| <b>16935</b><br>28" disc size  |      |      |      |      | •    |

\*Add drum width dimension as the suffix to the part number  
EXAMPLE: An 1125-4-200 reel drum width is 12". Order part number: 15359-12

## MODEL UPGRADES & ADDITIONS



**Spring Loaded Lock Pin**  
The spring-loaded lock pin assembly is designed to lock and secure the reel, even in mobile conditions over rough terrain.



**3-Way Pin Lock Kit**  
3 Positions - Pin locks reel with heavy duty 3/4" solid steel spin. Disengages for free unwind. Can be used to activate switch for electric rewind.



**Universal Bracket Kit**  
4 various positions 0°, 30°, 60°, 90° for mounting bevel crank on either side of the reel. Includes removable center guard cap for easy bearing access. Made from powder coated steel.



**Gear Guards**  
Guards beveled gears or chain and sprocket from dirt and foreign matter, while also protecting operator from injury.



**Idler Gear**  
Reduce drum speed and increase torque. Available in three sizes; they are factory installed on the motor kits.



**Brawny Reel Upgrade**  
Available for 1125 Series for 3,000 PSI - 10 gauge plates welded into each disc to keep them from bowing.  
- Prevents deformation and eventual crushing of the drum that can be caused by hose pressure  
- The center drum has been thickened from 16GA to 14GA.



**High Temperature Drag Brake**  
For 3/4" models



**3 Way Brake**  
A 3-position brake with lock, friction and free spinning positions. Easily clears brackets and guards for gloved-hand operation. In locked position, does not protrude past front of reel.



**Heavy Duty Band Brake**  
Steel band lined with brake friction material. Tension is adjusted with a wing nut or a knob by hand (no tools required)  
- Increased braking power  
- Increased brake life  
- Easier and more precise brake adjustment (control).



**Electrical Box & Switch**  
- Installs on any DC electric motor kit  
- Push button switch mounts to frame or to 3-Way Pin Lock  
- Works with all guards and accessories.



**Crank Handle Holster**  
Universal design mounts to either side of the reel with independent mounting holes. Handle inserts horizontally from front for use in tight spaces such as locker cabinets, boxes, and trailer compartments.










**Hose Strain Relief Kit**  
- Allows the hose to be secured against the drum.  
- The clamp provides a strain relief when the hose is fully extended from the reel.  
- Allow the hose to be routed between the riser connection and the hose clamp with a proper bend radius.

| PART NO.                             | 100 | 1125 | 1175 | 1185 | 1275 | 1600 |
|--------------------------------------|-----|------|------|------|------|------|
| <b>9077</b>                          | •   |      |      |      |      |      |
| <b>20843</b>                         |     | •    | •    | •    | •    | •    |
| <b>16702</b>                         |     |      |      |      |      | •    |
| <b>16400</b>                         |     |      |      |      |      | •    |
| <b>7406</b>                          |     | •    |      |      |      |      |
| <b>7700</b><br>24" disc size         |     |      | •    |      |      |      |
| <b>8176-1</b><br>24" disc size       |     |      |      | •    |      |      |
| <b>8176-2</b><br>28" disc size       |     |      |      | •    |      |      |
| <b>16601-122</b><br>20" disc size    |     |      |      |      |      | •    |
| <b>16602-138</b><br>24" disc size    |     |      |      |      |      | •    |
| <b>16602-180</b><br>28" disc size    |     |      |      |      |      | •    |
| <b>16300-122</b>                     |     |      |      |      |      | •    |
| <b>16300-138</b>                     |     |      |      |      |      | •    |
| <b>16300-180</b>                     |     |      |      |      |      | •    |
| Prefix model <b>BX-</b>              |     | •    |      |      |      |      |
| <b>7429-1-5</b>                      |     | •    |      |      |      |      |
| <b>16703</b>                         |     |      |      |      |      | •    |
| <b>8340</b>                          |     | •    | •    |      |      |      |
| <b>8302</b>                          |     |      |      | •    |      |      |
| <b>8302-1</b><br>90° Swivel          |     |      |      | •    |      |      |
| <b>16705</b>                         |     |      |      |      |      | •    |
| <b>16780-12</b><br>12 VDC            |     |      |      |      |      | •    |
| <b>16780-24</b><br>24 VDC            |     |      |      |      |      | •    |
| <b>16704</b>                         |     |      |      |      |      | •    |
| <b>HSRK-075</b><br>3/4" Hose         |     | •    | •*   |      |      |      |
| <b>HSRK-100</b><br>1" Hose           |     | •    | •    |      |      | •    |
| <b>HSRK-100F</b><br>1" Forestry Hose |     | •    | •    |      |      |      |
| <b>HSRK-150</b><br>1 1/2" Hose       |     |      |      | •    |      | •    |



\* With reducer (optional cap)





### SPEED CONTROLLERS FOR MOTORIZED MODELS

|  | PART NO. | MOTOR OPTIONS |    |    |    |
|--|----------|---------------|----|----|----|
|  |          | E             | EB | ED | EF |
|  Explosion-Proof Stationary Push Button Switch<br>For 12V D.C. applications, must be used with solenoid. Cast 3/4" N.P.T. hub inlet               | 20882    | •             |    |    |    |
|  Vapor Proof Junction Box<br>Includes box cover and gasket, has three 3/4" N.P.T. hubs  | 20883    | •             | •  | •  | •  |
|  Sealed Push Button Switch<br>Weather proof, dust-proof momentary contact. To be used with solenoid   | 20876    | •             | •  | •  | •  |
|  Solenoid Relay<br>12V D.C. for activating motor  | 20877    | •             |    | •  |    |
|  Circuit Breaker<br>50 amp automatic reset, circuit breaker. A circuit breaker is recommended for all 12V D.C. explosion proof motors             | 20878    | •             |    | •  |    |
|  Switch Box<br>(Includes #20876, #20877, & #20878 and all parts needed to assemble the entire switch box) - Casing is powder coated crinkle black | 8281     | •             |    | •  |    |
|  12 Volt DC Electric Motor Variable Speed Controller  | 20870    | •             |    | •  |    |

### SPEED CONTROLLERS FOR MOTORIZED MODELS

|  | PART NO. | MOTOR OPTIONS |    |    |    |
|--|----------|---------------|----|----|----|
|  |          | E             | EB | ED | EF |
|  12 Volt DC Electric Motor Variable Speed Controller<br>On/off push button switch<br>• Relay, 50-amp circuit breaker<br>• Forward/reverse feature | 20872    | •             |    | •  |    |
|  12 Volt DC Electric Motor Variable Speed Controller<br>On/off push button switch<br>• Relay, 50-amp circuit breaker                              | 20871    | •             |    | •  |    |

### PORTABLE HOSE REEL CART

|   | PART NO.                  | 1125 | 1175 |
|---|---------------------------|------|------|
|   |                           |      |      |
|  Portable Cart<br>Steel, round handle detaches for compact storage. Steel front legs with rubber feet prevent sliding. High grade ball bearings with hardened cup. 1/2" diameter steel axle. Solid 8" rubber tires. For 8" semi-pneumatic tires order model. Weight: 17 lbs. | PR-1125-6<br>1125-5-50    | •    |      |
|   | PR-1175-11<br>1175-6-100  |      | •    |
|   | PRP-1175-11<br>1175-6-100 |      | •    |
|   | PR-1175-15<br>1175-6-150  |      | •    |
|   | PRP-1175-15<br>1175-6-100 |      | •    |
|  Carry Handles<br>Easily bolts to "A" frame making the reel portable. 1" tube steel construction. Powder coated crinkle black. Weight: 8 lbs.  | PR-1125-HC                | •    |      |

# CUSTOMIZE YOUR REEL

FROM CONCEPT TO COMPLETION










## CUSTOMIZE YOUR REEL WITH COXREELS CUSTOM PRODUCTS:

Our engineering capabilities and manufacturing processes allow us to design and build top quality products for any conceivable application where reels are needed.

- Customize fluid paths/axles or create custom brackets, mounts, and accessories.
- Integrate with your specific hardware, systems, or devices.
- Modify drums, add divider disks, manipulate openings, or integrate hose handling devices.
- Combine features of various reel model lines, creating your own hybrid reel.
- Create custom retraction systems.
- Increase temperature and pressure capabilities, or multiply fluid paths.
- Unlimited customization possibilities!

### POWDER COAT OPTIONS\*

3 digit suffix for spring driven or 4 digit suffix for hand crank and motorized models.

|   |   |   |   |
|---|---|---|---|
|  |  |  |  |
| -BXX or -BXXX<br>Blue   | -RXX or -RXXX<br>Red  | -GXX or -GXXX<br>Gray   | -NXX or -NXXX<br>Green  |
|  |  |  |   |
| -KXX or -KXXX<br>Gloss Black  | -CXX or -CXXX<br>Crinkle Black  | -WXX or -WXXX<br>White  |   |

\*Minimum quantity & or dollar amount may apply

### POPULAR OPTIONS TO CUSTOMIZE YOUR REEL

To add any of these options to your reel simply suffix the option number after the model number. Consult factory for more options.

#### for SPRING DRIVEN REELS

- “-BVX” ... Change to Viton® seals
- “-BAX” ... Change to stainless steel fluid path & nitrile seals
- “-BBX” ... Change to stainless steel fluid path & Viton® seals
- “-BWX” ... Change to stainless steel swivel with food grade seals & non-toxic grease
- “-BxB” ... Add bend restrictor to hose
- “-BXC” ... Add Constant Tension (No latching mechanism)

To order a P-LP-350 with a bend restrictor simply suffix the option model number on the reel model number

Example: P-LP-350-BXB

#### for HAND CRANK & MOTOR DRIVEN REELS

- “-BVXX” ... Change to Viton® seals
- “-BAXX” ... Change to stainless steel fluid path & nitrile seals
- “-BBXX” ... Change to stainless steel fluid path & Viton® seals
- “-BDXX” ... Change to stainless steel swivel with food grade seals & non-toxic grease
- “-BXCX” ... Top 4-way rollerbracket





# HOW TO ORDER

The size, length and type of hose to be handled are primary factors in selecting the proper reel for your job. The following points should be considered:

## 1. HOSE I.D., O.D. & LENGTH

When space permits, select a reel with greater hose capacity than you require. This allows you to rewind the hose with less care and keeps the hose well protected within the disc dimension, even if the hose is not wound in uniform coils. (See hose selection chart below)

## 2. SIZE & TYPE OF SWIVEL JOINT & SEAL FOR INLET & OUTLET

In selecting your reel, please note the size of your hose versus the inlet and outlet sizes. Reducing your fitting & hose size will allow for more hose capacity. Please refer to the o-ring seal compatibility chart on page 50 for special application requirements.

## 3. RETRACTION METHOD & PROPER USE

Choose from Spring Driven, Hand Crank or Motor Driven retraction.

**SPRING DRIVEN:** Automatic rewind requiring no power source. Operator is to guide the hose or cord as it self-retracts and wraps around the drum. **For models to be mounted 15 feet above the floor, consult factory & specify on P.O.'s for proper spring retraction motor.**

**HAND CRANK:** Operator must manually crank the reel and guide the hose or cord evenly as it wraps around the drum to reach full capacity.

**MOTOR DRIVEN:** Requires a power source to operate in AC, DC, Air or Hydraulic power. On/Off switches and speed controllers are available to help control retraction speed. You must guide the hose or cord efficiently back on the reel to reach full capacity.

## 4. MOUNTING POSITION

Determine which mounting position you require. All reels are shipped in the floor-ceiling mount (FM) position with the exception of the "T," "EN," and "SD" Series, which are shipped in the wall-truck mount (WM) position. See diagram to the right for the "SP & DP" Series as well.

## 5. CHOOSE TYPE OF HOSE

Consider temperature, product type, and pressure required (PSI).


Always use good quality hose rated for the service and operating pressure required. Poor quality hose tends to expand and contract under pressure surges. When this happens, hose remaining on the reel may bind and become difficult to handle. In extreme cases, poor quality hose may expand under pressure to the extent that the reel becomes distorted and inoperable.

## 6. ADDITIONAL OPTIONS

**Customize your reel to meet your exact requirements.** Once you select your reel type, consider the different add-on features such as roller brackets, special mounting brackets, carry handles or a cart for portability. See the options available indicated on each page.


## BASIC INFORMATION

The Diagram Below Indicates The Basic Information Which Should Be Determined Before Ordering.

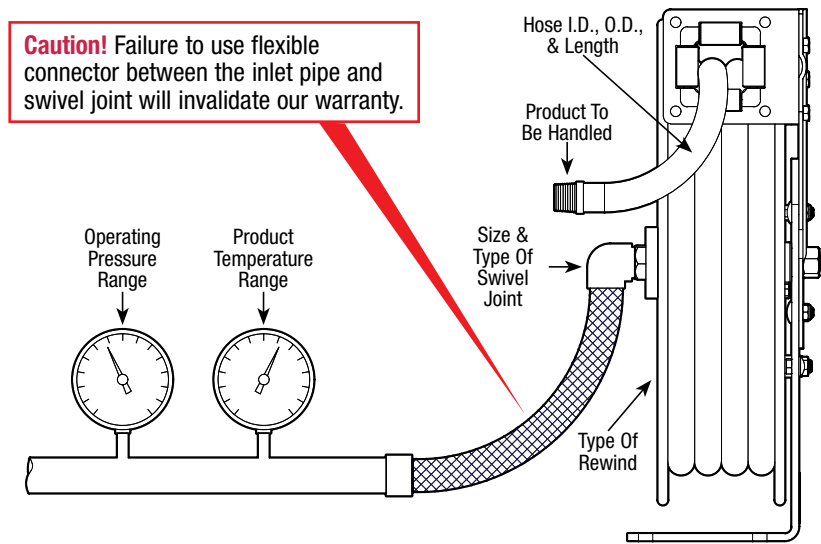


## MOUNTING POSITIONS

The Diagrams Below Indicate The Mounting Positions Which Should Be Determined Before Ordering.

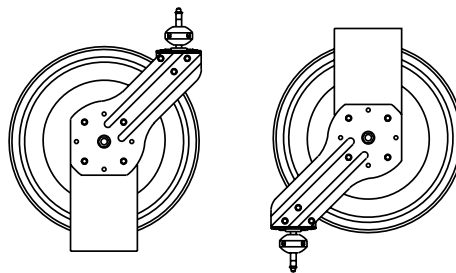


**"FM"** Floor-Ceiling Mount

All reels are shipped in this position unless specified with the exception of the T, EN, SD, SP & DP Series

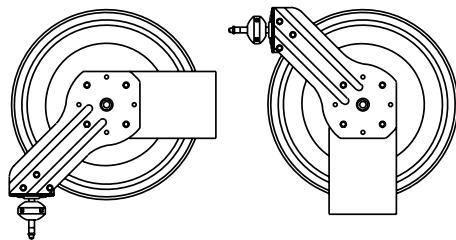

**"WM"** Wall-Truck Mount

EZ-T, EZ-EN & EZ-SD Series are shipped in this position unless specified

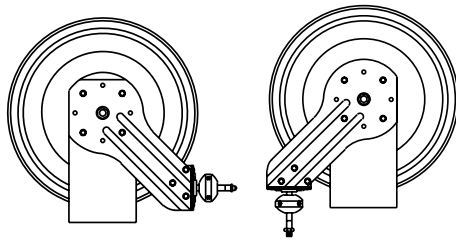

**"BM"**  
Bottom-Truck Mount

**"DM"**  
Down Mount

## E-MAIL INFORMATION


If you would like more information, feel free to e-mail us concerning your order or general questions you may have.

For general info or questions:  
[info@coxreels.com](mailto:info@coxreels.com)

For technical assistance:  
[techassist@coxreels.com](mailto:techassist@coxreels.com)

## HOSE SELECTION

The drawing below shows two reels with different shapes and dimensions but with identical hose capacity. In most cases, more than one reel will handle the size and length of hose you need, so you can specify a reel to fit your space requirements.

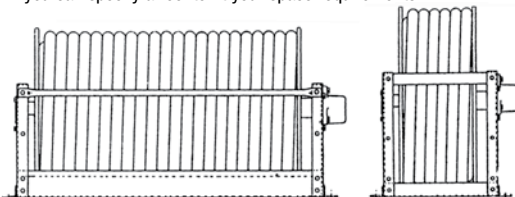

See Page 50 For Hose Assemblies & Component Parts

## 2 YEAR WARRANTY

Products manufactured by Coxreels are warranted for a period of two years from the date of sale to original purchaser. If within such warranty period any such equipment is proved, to Coxreels' satisfaction, to be defective, Coxreels shall be liable for the repair or, at Coxreels' option, replacement when the product is returned, freight prepaid, to Coxreels' plant or a Coxreels' service dealer. Coxreels' obligation hereunder shall be confined to such repair or replacement and shall be further conditioned upon Coxreels receiving written notice of any alleged defect within ten days after its discovery. Coxreels assumes no responsibility for improper choice of models or where products are used in excess of rated capacities and design functions, or under abnormal conditions. We make available a free engineering service to help with any product selection, application or problem.

Warranty is void if the product or any part thereof has been tampered with, altered, or repaired by other than authorized service personnel. Coxreels' responsibility ceases upon delivery to any common carrier, and we do not, unless previously instructed, insure shipments beyond point of delivery to such carrier. Any products, components or accessories that are not manufactured by Coxreels and are supplied by other manufacturers are subject to their respective guarantees or warranties. Certain products will carry their own warranties. Equipment specially built to customers' specifications and requirements is not subject to cancellation nor returnable for credit under any condition. We reserve the right to modify or alter materials, dimensions, design and construction, when necessary, to improve performance.

## RETURN POLICY

- No material will be accepted for return without written authorization by the factory, and a return goods authorization number assigned. Materials must be returned prepaid. A 20% restocking fee and a \$5.00 repacking charge normally applies. No material will be accepted for a credit after one year from the date of purchase. Custom products and special orders are not returnable.

## STATEMENT OF HOSE APPLICATIONS

Coxreels does not manufacture any hose. All hose supplied by Coxreels is selected from reliable commercial sources and is recommended for application on the basis of data supplied by the manufacturer. Coxreels assumes no responsibility for any other application or use. Hose supplied by Coxreels carries the warranty as listed by the manufacturer (90 days).

## TERMS

- Net 30 days on approved credit
- Minimum billing \$25.00
- Service charge 1 1/2% on past due accounts

## FREIGHT

- F.O.B. Factory
- Our responsibility ceases upon delivery to common carrier. Consignee must file claim for shortage and damaged freight with the carrier.

## DELIVERY

- Most standard items are shipped in five - ten business days or less. Consult customer service for availability.



## Coxreels' Customer Service - 1.800.269.7335

Call and request a Returned Merchandise Authorization# (RMA #). Warranty claims must be made by authorized Coxreels distributors. Be prepared to give the following information: product model number, serial number and purchase invoice number.

- Replacement parts ordered will be invoiced to your account.
- Once given an RMA #, you must write it on all boxes and paperwork. Coxreels will not accept your return without an RMA #.
- Upon receiving the return, if it is determined to be covered under warranty, a credit memo will be issued and mailed to you for your records.



# SAFETY FIRST



## PLEASE REVIEW ALL SAFETY INFORMATION BEFORE CHOOSING AND USING ALL EQUIPMENT

**SERIOUS INJURY, DEATH AND DESTRUCTION OF PROPERTY** can result from improper selection or improper use of products described in this catalog. Since COXREELS has no control over the number and variety of applications for which its products may be purchased or the conditions under which they may be used, COXREELS liability on any claim, whether in contract, tort (including negligence), or otherwise, for any loss or damage shall in no case exceed the price paid for product or any part thereof which give rise to claim. However, the general information contained herein shall allow the customer to select and assume all responsibility for product acceptability and fitness for specific applications. As always, COXREELS technical assistance and support is available for your convenience.



### WARNING - USER RESPONSIBILITIES

The customer, installer, and end users shall, through analysis and testing, assume sole responsibility in making the final selection of reels and accessories. Furthermore, these parties shall hold COXREELS harmless for all liability, claims, suits, and expenses incurred. These parties shall ensure training, performance, endurance, routine inspections, maintenance, safety precautions and warnings regarding the application are enforced at all times. COXREELS is not responsible for use of products in excess of rated and recommended capacities, design functions, or abnormal conditions.



### CAUTION - PROPER SELECTION OF ACCESSORIES

Coxreels offers a wide variety of accessory items and optional features for its reels. It is the sole responsibility of the customer, installer, and end users to ensure that the proper items and features have been selected to fit the application. Consult with Coxreels technical support for available accessories and optional features which will help you to keep your product safe in its environment. These items may include mounting brackets, guards, guides, and electrical components.



### WARNING - FOLLOW INSTRUCTIONS

The customer, installer, and end users shall ensure that all potential users of these products receive continual training and access to all relevant product manuals and safety instructions. This information should be thoroughly reviewed prior to installation, stored and reviewed continually during use of the product. Coxreels assumes no responsibility for fitness of installation

and continued use in specific applications. Any overhead installations should be such that the reel is not supported solely by bolts under tension. A safety chain or cable is necessary to eliminate potential for damage or personal injury.



### IMPORTANT - FOLLOW GOOD MAINTENANCE PRACTICES

When receiving your products, establish a program for inspection, testing, and periodic replacement of worn items depending on factors such as; severity of application, frequency of equipment use, and past performance indicators. Use only properly trained persons to perform these duties. Update training periodically. Document the maintenance, inspections, and testing of products. Never allow an improperly functioning reel or accessory product to be put into use.

Documented inspections shall include in part, pressurized units, swivel joints, hose, hose fittings, cable, mounting hardware, roller guides and any such moving parts. Never allow the use of hoses or cables other than what is intended in the design of the reel. Changes in diameter, weight, length, or flexibility can affect the function and may cause damage or personal injury. Consult specific product manuals, or factory, with any questions regarding proper maintenance practices.

The use of any replacement components other than those provided by Coxreels is prohibited. Coxreels shall be held harmless from any improper selection of such components which may affect function and overall safety of the product.

**NOTE:** All designs, specifications, and dimensional data contained in this book are subject to change without notice. No additional warranties, express or implied, including warranties of merchantability for fitness for a particular purpose, are created by the descriptions and depictions of the products on in this book.



## PROP 65

In compliance of California's Proposition 65, Coxreels will be applying warning labels to all applicable products with regard to chemicals known to the state of California to cause cancer or reproductive harm.

All reels will carry the following warning.

Parts and components will carry warning labels relative to the respective materials used.

For more information see <http://www.coxreels.com/prop65.html>




## WARNING

This product can expose you to chemicals including nickel, which are known to the State of California to cause cancer, and chemicals including chromium, which are known to the State of California to cause birth defects or other reproductive harm.

For more information: [www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product)



## INDUSTRY CATALOGS

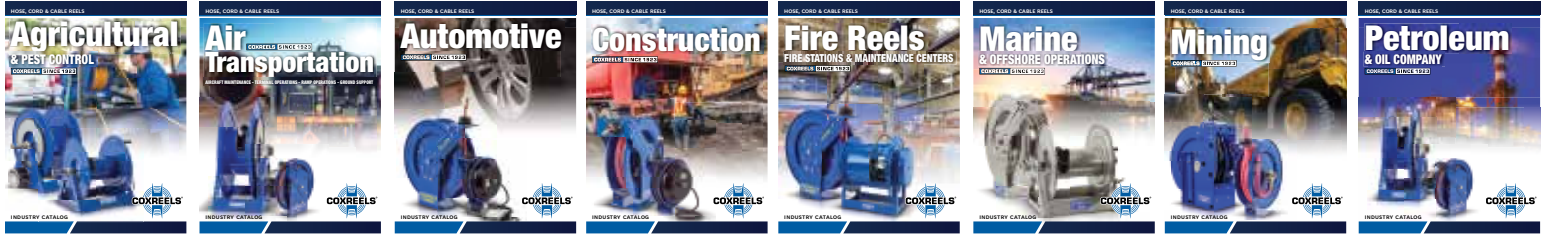

## PRODUCT CATALOGS



100 years  
**Coxreels**  
 USA made since 1923

### CORPORATE HEADQUARTERS:

Tempe, Arizona USA  
 P: 480.820.6396 F: 480.820.5132  
 Toll Free: 800.COX.REEL  
[www.coxreels.com](http://www.coxreels.com) [info@coxreels.com](mailto:info@coxreels.com)

### INTERNATIONAL:

EUROPE / MIDDLE EAST / AFRICA  
 P: +44 (0) 1536 464 990  
 F: +44 (0) 1536 464 999  
[www.crireels.com](http://www.crireels.com) [sales@cireels.com](mailto:sales@cireels.com)

