

1275 SERIES LARGE CAPACITY DUAL HOSE REELS

COXREELS® 1275 Series “Dual Hose” hand crank or motorized hose reels are designed for large capacity applications. This series features dual plumbing with two swivel inlets and two low profile outlets that compliment the open drum slot and provide a non-crimping, flat smooth hose wrap. The industry preferred one piece all welded “A” frame design adds rigidity and strength while the positive gear drive rewind assures consistent trouble-free performance.

1275 SERIES MODELS

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	BAR	Kg.	SIZE INDEX
	I.D. mm	O.D. mm	LENGTH m	I.D. mm	O.D. mm	LENGTH m				
	1275-4-50-X	13	22	2/15	10	19				
1275-4-100-X	13	22	2/30	10	19	2/43	13 mm F NPT	207	19	2
1275-4-150-X	13	22	2/46	10	19	2/61	13 mm F NPT	207	21	3
1275-4-200-X	13	22	2/61	10	19	2/91	13 mm F NPT	207	25	4
1275-6-50-X	25	36	2/15	19	32	2/18	25 mm F NPT	207	29	5
1275-6-75-X	25	36	2/23	19	32	2/34	25 mm F NPT	207	31	6
1275-6-100-X	25	36	2/30	19	32	2/47	25 mm F NPT	207	34	7
1275-6-150-X	25	36	2/46	19	32	2/61	25 mm F NPT	207	40	8



1275-E Series

1275 SERIES :: REEL SPECIFICATIONS

SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets (one on each side of the reel)
- Swivel Seals: NITRILE
- Swivel O-ring seals supported by Teflon spacers
- Electroless nickel plated steel swivel on 25 mm models

DESIGN & STRUCTURE

- All welded steel “A” frame construction for superior reel structure
- Two low profile outlet risers & open drum slot design for dual hose applications
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation

RETRACTION

- Reliable direct gear drive on motor driven models - **NO CHAIN**
- Bevel gear hand crank with removable handle for compact storage
- See Motor Options Chart

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer’s limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Twin Agent Applications
- Fire Suppression
- Offshore Oil Rigs
- Shipyard & Port Operations
- Hydraulic
- Mining Operations
- Aircraft Maintenance
- Petroleum Production Fields

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

- SUFFIX “X” OPTIONS


When ordering, substitute the “X” with selection below. Add 2 Kgto ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. Kg.*
A	AIR - #4 GAST	COMP. AIR MOTOR	4
E	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	6
EF	ELEC. - 24V DC	1/3 HP REW. REV. TYPE	6
EB	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	12
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	12
EA	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	12
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	3
C	FRONT HAND CRANK	BEVEL GEARED CRANK	1

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W mm			H mm		L mm	X mm	Y mm		Ø mm	Dw mm
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
1	479	575	505	473	486	448	340	391	406	159	203
2	581	676	606	473	486	448	441	391	406	159	305
3	733	829	759	473	486	448	594	391	406	159	457
4	886	981	911	473	486	448	746	391	406	159	610
5	-	778	705	581	581	508	483	479	479	267	343
6	-	778	705	664	664	610	483	518	518	267	343
7	-	940	870	664	664	610	648	518	518	267	508
8	-	940	870	764	764	711	648	573	573	267	508

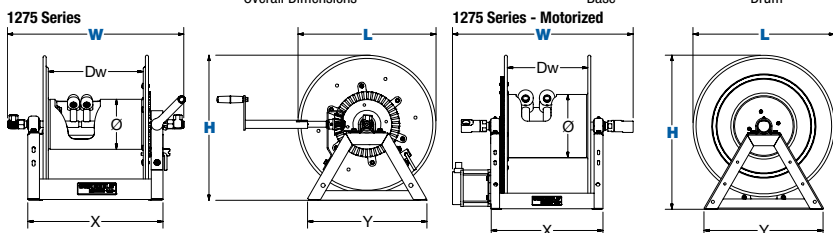

MOTORIZED
HAND CRANK

