
# SS 100, 1125 & 1175 SERIES STAINLESS STEEL HAND CRANK & MOTORIZED HOSE REELS

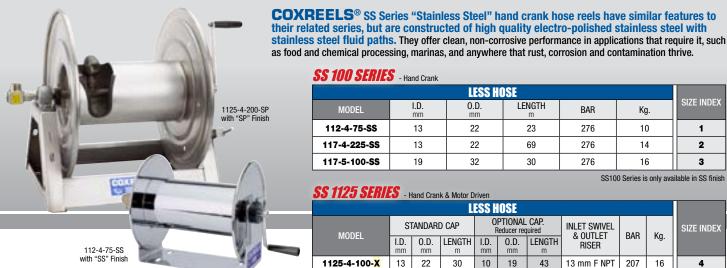

### SS SERIES - HAND CRANK/ MOTORIZED :: REEL SPECIFICATIONS SWIVEL

- · Non-corrosive external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- · Swivel Seals: NITRILE Non-Toxic Food Grade Grease

### DESIGN & STRUCTURE

- · Choice of stainless steel finish includes:
- "-SP" Standard unpolished "as manufactured" stainless steel finish
- "-SS" Electro-polished stainless steel finish
- Each of these reels is built of their standard series with their own unique features & benefits

### RETRACTION

- · See page 36 for 100 Series features
- · See page 40 for 1125 Series features
- · See page 41 for 1175 Series features

## SIGNATURE FEATURES

- · Professional grade heavy duty steel construction
- Durable proprietary CPC<sup>™</sup> powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

# **POSSIBLE FIELDS OF APPLICATION**

- · Corrosive Environments
- · Hygienic Environments
- Fire Suppression

**MOTORIZED** 

HAND CRANK

- Medical Services
- Marine/Docks/Offshore Manufacturing Plants &
- Facilities
- Pulp & Paper Plants Food & Chemical
- **Processing Plants**

- · 0-Rings & Swivels
- Roller Brackets
- Stacking Bracket

- · Bottling Plants
- Dairies
- Meat Packing
- Grocery Stores
- Restaurants & Commercial Kitchens
- Water Treatment & Supply
- Petrochemical
- Food Grade Washdown

Assorted Reel Accessories

# ACCESSORIZE YOUR REEL .: PG 50

ts			

SS 100 SERIES - Hand Crank										
LESS HOSE										
MODEL	I.D. mm	0.D. mm	LENGTH m	BAR	Kg.					
112-4-75-SS	13	22	23	276	10					
117-4-225-\$\$	13	22	69	276	14					

32

SS100 Series is only available in SS finish

16

SIZE INDEX

1 2

3

# SS 1125 SERIES - Hand Crank & Motor Driven

19

117-5-100-SS

LESS HOSE											
MODEL	S	Tandari	d cap	OPTIONAL CAP. Reducer required			INLET SWIVEL	DAD	Ka	SIZE INDEX	
MODEL	I.D. mm	<b>0.D.</b> mm	LENGTH m	I.D. mm	<b>0.D.</b> mm	LENGTH m	- & OUTLET BAR Kg. RISER				
1125-4-100- <mark>X</mark>	13	22	30	10	19	43	13 mm F NPT	207	16	4	
1125-4-200- <mark>X</mark>	13	22	61	10	19	91	13 mm F NPT	207	18	5	
1125-5-100- <mark>X</mark>	19	32	30	13	22	61	19 mm F NPT	207	19	6	
1125-5-200- <mark>X</mark>	19	32	61	13	22	137	19 mm F NPT	207	25	7	

30

276

Designate either SP or SS for choice of finish

# SS 1175 SERIES - Hand Crank & Motor Driven

LESS HOSE											
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET		Ka	SIZE INDEX	
MODEL	I.D. mm	0.D. mm	LENGTH m	I.D. mm	0.D. mm	LENGTH m	RISER	BAR	Kg.		
1175-6-100- <mark>X</mark>	25	36	30	19	32	46	25 mm F NPT	207	32	8	
1175-6-200- <mark>X</mark>	25	36	61	19	32	91	25 mm F NPT	207	38	9	
<b>L</b> ,	Designa	ate either	SP or SS for	r choice	of finish		•		·······		


### MOTOR OPTIONS When ordering, suffix the model number with selection below. \*Add 2 Kg to ship weight if reel is crated

	0,		0 1 0
SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. Kg.*
A	AIR - #4 GAST	COMP. AIR MOTOR	4
E	ELEC 12V DC	1/3 HP REW. REV. TYPE	6
EB	ELEC 24V DC	1/2 HP REW. REV. TYPE	12
ED	ELEC EXPL. PRF 12V DC	1/2 HP REW. REV. TYPE	12
EA	ELEC EXPL. PRF.	115V 1/2 HP REW., AC REV. TYPE	12
н	HYDRAULIC	END PORTED 9/16-18 UNF REV.	3
C	FRONT HAND CRANK	BEVEL GEARED CRANK	1

# **REEL DIMENSIONS** Technical Data Sheets Available On Website

		W mm			H mm		Х	Y mm		ø	Dw
SIZE INDEX	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.	L mm	mm	CRANK	ELEC.	mm	mm
1	578	-	-	330	-	305	356	152	-	140	318
2	578	-	-	457	-	432	356	152	-	140	318
3	591	-	-	457	-	432	356	152	-	140	318
4	495	502	432	476	489	448	289	391	406	159	152
5	648	654	584	476	489	448	441	391	406	159	305
6	679	660	594	476	489	448	441	391	406	159	305
7	984	965	899	476	489	448	746	391	406	159	610
8	714	660	622	664	664	610	432	511	511	267	292
9	930	876	838	664	664	610	648	511	511	267	508
		Overall Dimensions								Dr	





SS 1125 & 1175 Series

