

Dual High Capacity Hose Reels

AVAILABLE IN: **SPRING DRIVEN**

DP SERIES

COXREELS® DP Series “Dual Product Delivery” spring driven hose reels have two swivel inlets and two outlets for dual hose applications. Like the SP Series they are built to handle large hose diameters used in applications demanding large volume delivery in low and medium pressures. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

LOW PRESSURE Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 300 psi and temperatures to 250° F. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**


MODEL	HOSE						LESS HOSE		SIZE INDEX
	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APPR. LBS.	MODEL	APPR. LBS.	
Please Consult Factory For Reels With Hose	3/8"	3/4"	50	300	1/2"	-	DLPL-350	94	1
	3/8"	3/4"	75	300	1/2"	-	DLPL-375	115	1
	3/8"	3/4"	100	300	1/2"	-	DLPL-3100	117	2
	1/2"	7/8"	50	300	1/2"	-	DLPL-450	97	1
	1/2"	7/8"	75	300	1/2"	-	DLPL-475	104	2
	1/2"	7/8"	100	300	1/2"	-	DLPL-4100	138	3
	3/4"	1 1/4"	25	300	3/4"	-	DLPL-525	93	4
	3/4"	1 1/4"	50	300	3/4"	-	DLPL-550	100	5

MEDIUM PRESSURE Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 3000 psi and temperatures to 250° F. For higher temperatures and pressures, see price sheet or consult factory. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

MODEL	HOSE						LESS HOSE		SIZE INDEX
	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APPR. LBS.	MODEL	APPR. LBS.	
Please Consult Factory For Reels With Hose	3/8"	25/32"	50	3000	1/2"	-	DMPL-350	99	1
	3/8"	25/32"	75	3000	1/2"	-	DMPL-375	128	1
	3/8"	25/32"	100	3000	1/2"	-	DMPL-3100	120	2
	1/2"	29/32"	50	3000	1/2"	-	DMPL-450	102	1
	1/2"	29/32"	75	3000	1/2"	-	DMPL-475	115	2
	1/2"	29/32"	100	3000	1/2"	-	DMPL-4100	138	3

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	A	B	C	D	E	F	G
1	10 1/2"	7 1/2"	20"	15 3/8"	22"	22 1/2"	20 1/2"
2	10 1/2"	7 1/2"	24"	15 3/8"	22 1/2"	26"	24 1/2"
3	10 1/2"	7 1/2"	28"	15 3/8"	22 1/2"	30"	28 1/2"
4	10 1/2"	7 1/2"	20"	15 3/8"	23 3/4"	22 1/2"	20 1/2"
5	10 1/2"	7 1/2"	24"	15 3/8"	23 3/4"	26"	24 1/2"

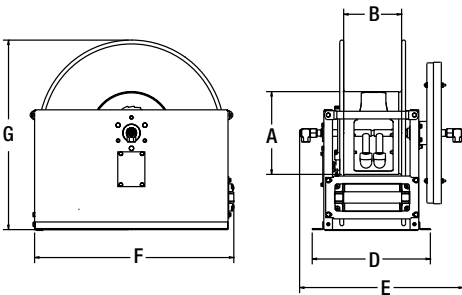

A DUPLEX FOR YOUR HOSE!

DP SERIES Offers...

- Hose I.D:** 3/8" - 3/4" **Pressure:** To 3,000 PSI
- ✓ Two Inlets & Two Outlets To Handle Dual Hose Applications
 - ✓ Auto Rewind Easily Wraps, Stores & Protects Hose
 - ✓ Reinforced Steel Frame Provides Maximum Strength & Stability
 - ✓ Long Lasting Self-Lubricated Flange Bearings
 - ✓ Cast Iron Lock Ring With Non-Sparking Bronze Pawl
 - ✓ Non-Corrosive Stainless Steel Pawl Spring
 - ✓ Heavy Duty 1" O.D. Stainless Steel Pinch-Proof Rollers
 - ✓ Adjusts To Wall, Floor & Overhead Positions
 - ✓ Swivel Seals: NITRILE

SPRING DRIVEN FEATURES:

- ✓ Low Profile Outlet Riser & Open Drum Slot Design
- ✓ Lubricated Factory-Matched Cartridge-Style Spring Motor
- ✓ Full-Flow Swivel Assures Maximum Product Delivery
- ✓ Multi-Position Lock Ratchet Secures Hose At Desired Length
- ✓ All Working Parts Are Easily Accessible For Servicing

COXREELS® SIGNATURE FEATURES:

- ✓ Professional Grade Heavy Duty Steel Construction
- ✓ Durable Proprietary CPC™ Powder Coat Process
- ✓ Rolled Edges & Ribbed Discs Provide Strength & Safety
- ✓ Leading 2-Year Manufacturer's Limited Warranty
- ✓ Made In The U.S.A. Sold & Supported Worldwide

HOW TO ORDER?
See Page 5 For Details

NEED SPECIAL O-RINGS
See Page 35 For Details

AVAILABLE OPTIONS

ROLLER BRACKETS



IMPROVE HOSE HANDLING FROM ANY DIRECTION
MANY STYLES AVAILABLE
See Page 34 For Selection

STAINLESS STEEL



SWIVELS & PLUMBING FOR PURE PRODUCT FLOW APPLICATIONS
Consult Factory For Details



Toll Free 800-COX-REEL • Fax 800-229-REEL • Int 480-820-6396 • Fax 480-820-5132 • www.coxreels.com

