ACCESSORIES HAND CRANK & MOTORIZED REELS

ROLLER BRACKETS -

4-WAY ROLLER BRACKETS

			무	Ξ	=	Ξ̈́	Ξ̈́	12	16(
	12" d 907" 12" d 907" 12" d 90 17" d 907" 17" d 907" 17" d 907" 17" d 15"	9075-8 12" disc size	•						Г		
		9075-12.5	•						Г		
		12" disc size 9073-8							H		
		17" disc size	•						L		
		9073-12.5 17" disc size	•								
		9073-18	•						Г		
		17" disc size 15353*		•							
		15355*		-					H		
		1275W-C						•	L		
		15357* 15368*			•				L		
4		28" disc size					•				
		15368-1* 32" disc size					•				
		15369*							H		
		24" disc size				Ť			L		
		15369-1* 28" disc size				•					
		16901									
		20" disc size 16902							•		
		24" disc size							•		
		16903 28" disc size							•		
	Top Rewind										
	CEILING MOUNT APPLICATIONS	15358*		•				•			
	4-way enclosed pinch-proof stainless steel rollers are 1" in diameter										
W	supported by powder coated steel	45056*		15356*							
V	brackets. Specify ceiling mount & specify drum width. Weight: 10 lbs.	15350			•						
•	Bottom Rewind	15354*		•				•			
	4-way enclosed pinch-proof	15037*			•						
1	stainless steel rollers are 1" in diameter supported by powder	15370-1*				•					
, de	coated steel brackets. Specify	15370*					•				
	drum width. Weight: 10 lbs.	PART OF FRAME					•				
	Top Rewind Extension 4-way enclosed pinch-proof										
	stainless steel rollers are 1" in	15353-P*									
	diameter supported by powder coated steel brackets. Specify										
4 .	drum width. Weight: 10 lbs.								L		
·	4-Way Roller	CONSULT									
	4-way enclosed pinch-proof stainless steel rollers are 1" in diameter.	FACTORY		•	•	•	•	•	•		
	Universal Roller 4-Way										
AT	4-way enclosed pinch-proof stainless steel rollers are 1* in diameter. Mounted on universal bracket with 4 various positions 0°, 30°, 60°, 90°.	16930 20" disc size							•		
									L		
		16931									

† This bracket only works with idler gears on 28" models. Consult factory.

*Add drum width dimension as the suffix to the part number


EXAMPLE: An 1125-4-200 reel drum width is 12". Order part number: 15353-12

Made from steel, powder coat black.

1125 SERIES STACKING BRACKET			AVAILABLE FOR SERIES			
		PART NO.	1125	1125WCL		
double the s	125 Series reels for torage in the same owder coated crinkle construction.	7480	•	•		

*Add drum width dimension as the suffix to the part number

EXAMPLE: An 1125-4-200 reel drum width is 12". Order part number: 7480-12

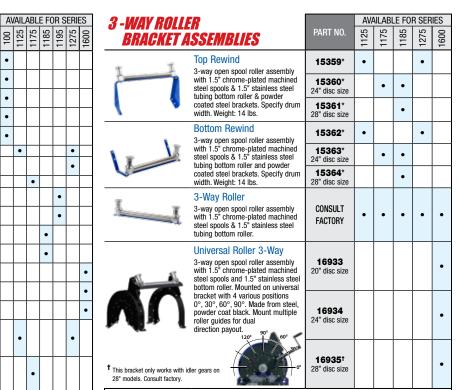

*Add drum width dimension as the suffix to the part number EXAMPLE: An 1125-4-200 reel drum width is 12". Order part number: 15359-12

HOSE GUIDES			AVAILABLE FOR SERIES			
		PART NO.	1125	1175	1185	
16	Pivoting Hose Guide Heavy gauge powder coated steel arm & pivot mount w/5 locking positions. Stainless steel enclosed 4-way roller system & zinc plated axle for non-corrosive performance. Specify drum width. (For motor options E & ED only). Weight: 17 lbs.	15733 Top Return	•			
		15732 Bottom Return	•			
	Pivoting Hose Guide HD Heavy gauge powder coated steel arm & pivot mount w/5 locking positions. Large 1" diameter pivot shaft. Sealed precision bearings support pivot shaft & chrome-plated billet aluminum guide rollers. Specify drum width. (For motor options E & ED only). Weight: 17 lbs.	15728 Bottom Return		•	•	
		15729 Top Return		•		
		15730 Top Return			•	
	Sliding Hose Guide 4-way, solid black delrin roller assembly, smooth tapered handle, non-corrosive zinc plated solid rods, heavy gauge "CPC" powder coated steel framing. Specify drum width. Weight: 8 lbs.	15734	•			
CARDEN HOSE KIT				AVAILA	ABLE ON	

GARDEN HUSE KII	PART NO.	1/2" Plumbing On Any Reel
Garden Hose Kit You are able to connect any hose to a reel with 1/2* plumbing. You will be able to use any garden hose for everything from watering plants to washing your car. Kit includes: NPT to garden hose adaptor & adaptor hose.	15717	•



16932[†]

28" disc size