

COXREELS® EZ-EN Series "Enclosed" spring driven hose reels are protected by a powder coated steel casing that shields out the elements to protect and extend the life of the reel, the hose, and the components inside. This series adds a neat, tidy, aesthetic appearance to work environments that demand a clean and professional look. The three piece casing is easy to assemble and disassemble for simple installation and maintenance.

APPLICATIONS

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Restaurants & Commercial Kitchens
- Grocery Stores
- Food & Chemical Plants



EZ-EN SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
LOW PRESSURE Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.								
EZ-EN-325	3/8"	5/8"	25	300	49	ENL-N-325	46	1
EZ-EN-350	3/8"	5/8"	50	300	65	ENL-N-350	58	2
EZ-EN-425	1/2"	3/4"	25	300	63	ENL-N-425	58	1
EZ-EN-450	1/2"	3/4"	50	300	69	ENL-N-450	64	2
MEDIUM PRESSURE Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum Temperature 250°F.								
EZ-ENM-325	3/8"	1 1/16"	25	3,000	61	ENML-N-325	54	1
EZ-ENM-350	3/8"	1 1/16"	50	3,000	80	ENML-N-350	68	2
EZ-ENM-425	1/2"	1 3/16"	25	2,500	61	ENML-N-425	54	1
EZ-ENM-450	1/2"	1 3/16"	50	2,500	82	ENML-N-450	68	2
HIGH PRESSURE Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum Temperature 250°F.								
EZ-ENH-125	1/4"	9/16"	25	5,000	60	ENHL-N-125	54	1
EZ-ENH-150	1/4"	9/16"	50	5,000	79	ENHL-N-150	68	2
EZ-ENH-350	3/8"	1 1/16"	50	4,000	80	ENHL-N-350	68	2

REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	6 7/8"	18 7/8"	19"	6"	6"	4"	5"
2	8 1/2"	21 3/4"	21 7/8"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern

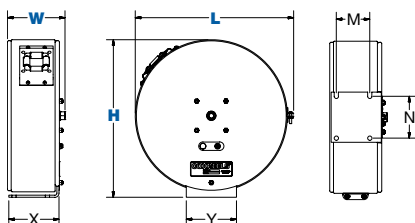

EZ-EN SERIES :: REEL SPECIFICATIONS

SWIVEL

- Machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy, enclosed reel for aesthetic purposes & greater hose protection
- Models with size index #2 feature Coxreels' exclusive Super Hub™ dual axle support system
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Heavy gauge steel 3-piece casing with adjustable hose roller guide

EZ-COIL RETRACTION

- **OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS**
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade, heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

