

COXREELS® EZ-P-W and EZ-SHW Series spring driven "Welding" hose reels are the ideal solution for managing bulky twin line welding hose. The P-W Series, like the EZ-P Series, is more compact in size and shares the reputation for long lasting performance. The EZ-SHW Series has a larger chassis and frame to accommodate longer lengths of welding hose and Coxreels' original Super Hub dual axle support system for increased stability during operation, less vibration and greater structural integrity.

APPLICATIONS

- Manufacturing Plants
- Maintenance, Repair, & Operations
- Welding / Service Trucks
- Welding Shops
- Garage Settings
- Automotive & Fleet Maintenance
- Pipelines
- Mining, Construction, & Railroad Operations



EZ-P-W & EZ-SHW SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE					LESS HOSE		SIZE INDEX
MODEL	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
OXYGEN-ACETYLENE							
Hose supplied on reel is twin-siemese type meeting R.M.A. and C.G.A. type V.D. grade R specifications. Use of other types of hose is not recommended.							
EZ-P-W-125	1/4"	25	200	46	EZ-P-WL-125†	39	1
EZ-SHW-150	1/4"	50	200	64	EZ-SHWL-N-150†	52	2
EZ-SHW-175	1/4"	75	200	80	EZ-SHWL-N-175†	63	3
EZ-SHW-1100	1/4"	100	200	84	EZ-SHWL-N-1100	62	3
OTHER FUELS							
Hose supplied on reel is twin-siemese type grade "T." Grade "T" reels and hoses are used for a wide variety of gases, such as MAPP, propane, natural and fuel.							
EZ-P-WT-125	1/4"	25	200	46	EZ-P-WTL-125†	39	1
EZ-SHW-150	1/4"	50	200	64	EZ-SHWTL-N-150†	52	2
EZ-SHW-175	1/4"	75	200	80	EZ-SHWTL-N-175†	63	3
EZ-SHW-1100	1/4"	100	200	84	EZ-SHWTL-N-1100	62	3

REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	8 1/2"	18 5/8"	17"	6"	6"	4"	5"
2	10 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
3	10 1/4"	25 1/2"	24"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern

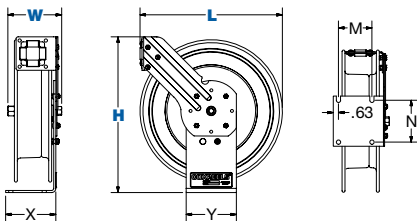

EZ-P-W & EZ-SHW SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Swivel lock bracket ensures maximum safety
- Swivel Seals: VITON®

DESIGN & STRUCTURE

- Designed for Oxy-Acetylene or "T" grade welding hose
- Single pedestal reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor, & overhead positions
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Coxreels' exclusive Super Hub™ dual axle support system on models with size index #2 & #3

EZ-COIL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position, non-sparking lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- O-Rings & Swivels
- Hoses
- Mounting Brackets
- Assorted Reel Accessories

