

Construction

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP
for lead length positioning

VERSATILE GUIDE ARM adjusts to wall,
floor, ceiling & vehicle mounting


**EXTERNAL FLUID PATH WITH FULL-FLOW
BRASS NPT SWIVEL** that screws directly on
1" solid steel axle, for simple seal maintenance
and fast and easy hose installation
- Viewable on opposite side



HIGH QUALITY STEEL CONSTRUCTION with our
durable CPC™ powder coat finish

HEAVY DUTY SPUN DISCS WITH ROLLED EDGES
- not stamped, for greater strength, made with
first of its kind CNC robotic spinning cell

**ENCLOSED FACTORY TUNED AND MATCHED
CARTRIDGE-STYLE SPRING MOTOR**, easily
removed for safe & convenient replacement
- Viewable on opposite side




**HEAVY GAUGE 1/4" STAINLESS STEEL BASE
& SUPPORT POST** for maximum stability

**TRIPLE AXLE SUPPORT WITH SUPER HUB™
& A FULL FRAME** increased reel strength
for more demanding applications
Only on T Series. SH Series features dual axle support

POSSIBLE FIELDS OF APPLICATION

- Pneumatic Tools
- Washdown
- Ground Maintenance
- Lubrication
- Power Tools
- Welding
- Water Trucks
- High Volume Delivery

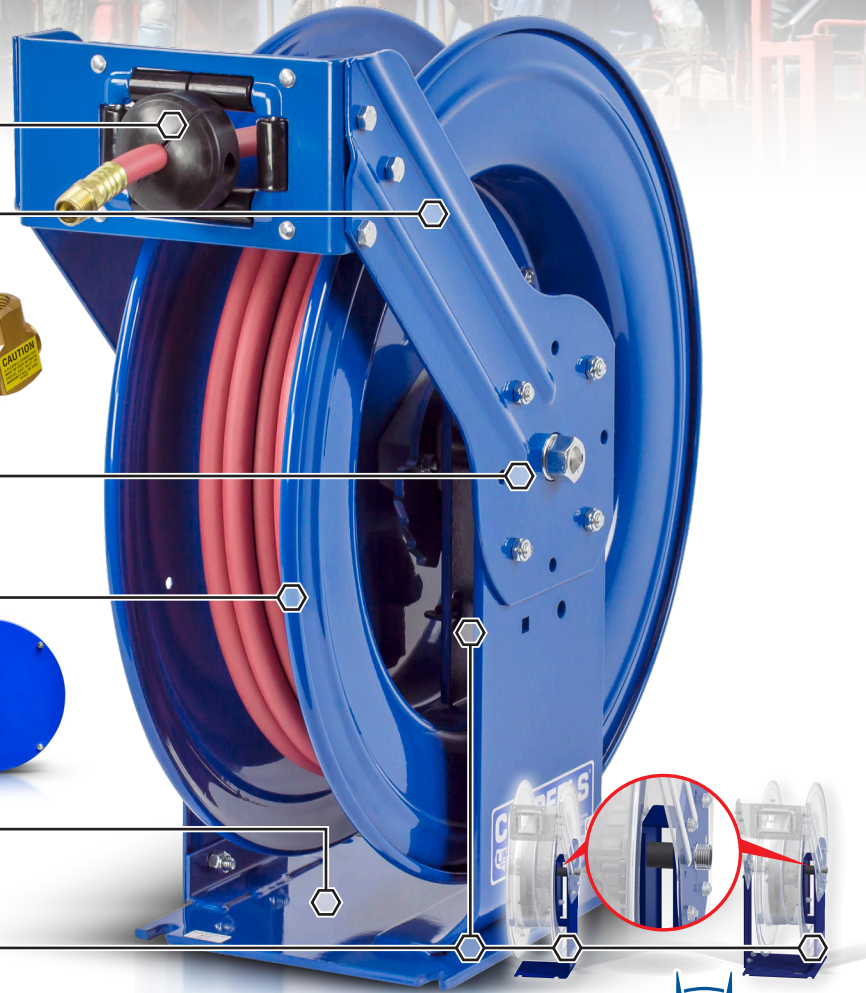

WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS





SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-350	EZ-SH-350	3/8"	50	300	50	8 1/4 x 21 1/4 x 19 1/2"
SH-N-450	EZ-SH-450	1/2"	50	300	54	8 1/4 x 21 1/4 x 19 1/2"
MP-N-350	EZ-MP-350	3/8"	50	3,000	65	8 1/4 x 21 1/4 x 19 1/2"
MP-N-450	EZ-MP-450	1/2"	50	2,500	67	8 3/4 x 25 1/2 x 19 1/2"
HP-N-150	EZ-HP-150	1/4"	50	5,000	64	8 3/4 x 25 1/2 x 19 1/2"
HP-N-350	EZ-HP-350	3/8"	50	4,000	65	9 1/4 x 25 1/2 x 19 1/2"



T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
TSH-N-350	EZ-TSH-350	3/8"	50	300	61	9 3/8 x 21 1/4 x 19 1/2"
TSH-N-3100	EZ-TSH-3100	3/8"	100	300	85	9 3/8 x 25 1/2 x 24"
TSH-N-450	EZ-TSH-450	1/2"	50	300	63	9 3/8 x 21 1/4 x 19 1/2"
TSH-N-4100	EZ-TSH-4100	1/2"	100	300	95	9 3/8 x 25 1/2 x 24"
TSH-N-550	EZ-TSH-550	3/4"	50	300	83	9 7/8 x 25 1/2 x 24"
TSH-N-650	-	1"	50	300	98	12 x 25 1/2 x 24"



DUAL HYDRAULIC

- External fluid path with dual port melanzined 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON

MEDIUM PRESSURE						
TMP-N-350	EZ-TMP-350	3/8"	50	3,000	74	9 3/8 x 21 1/4 x 19 1/2"
TMP-N-3100	-	3/8"	100	3,000	106	9 3/8 x 25 1/2 x 24"
TMP-N-450	EZ-TMP-450	1/2"	50	2,500	77	9 3/8 x 21 1/4 x 19 1/2"
TMP-N-4100	-	1/2"	100	2,500	106	9 3/8 x 25 1/2 x 24"

HIGH PRESSURE						
THP-N-150	EZ-THP-150	1/4"	50	5,000	74	9 3/8 x 21 1/4 x 19 1/2"
THP-N-1100	EZ-THP-1100	1/4"	100	5,000	104	9 3/8 x 25 1/2 x 24"
THP-N-350	EZ-THP-350	3/8"	50	4,000	78	9 3/8 x 21 1/4 x 19 1/2"
THP-N-375	EZ-THP-375	3/8"	75	4,000	98	9 3/8 x 25 1/2 x 24"

DUAL HYDRAULIC						
TDMP-N-350	-	3/8"	50	3,000	104	11 3/8 x 25 1/2 x 24"
TDMP-N-450	-	1/2"	50	2,500	106	11 3/8 x 25 1/2 x 24"



PC SERIES

- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization
- 5' Lead cable & grounding plug

MODEL	EZ-Coil® Safety Line	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
PC13-5012-A	EZ-PC13-5012-A	Single receptacle	12 / 3	50	20	40	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-A	EZ-PC13-5016-A	Single receptacle	16 / 3	50	13	36	8 1/2 x 14 7/8 x 13 1/2"
PC-24-0012A	EZ-PC24-0012-A	Single receptacle	12 / 3	100	20	81	10 1/4 x 25 1/2 x 24"
PC13-5012-B	EZ-PC13-5012-B	Quad receptacle	12 / 3	50	20	41	8 1/4 x 14 7/8 x 13 1/2"
PC-24-0012B	EZ-PC24-0012-B	Quad receptacle	12 / 3	100	20	84	10 1/4 x 25 1/2 x 24"
PC13-5012-F	EZ-PC13-5012-F	G.F.C.I. receptacle	16 / 3	50	13	38	8 1/2 x 14 7/8 x 13 1/2"

CHOICE OF ELECTRICAL ACCESSORIES



P-W & SHW SERIES

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Available in "T" Grade welding hose

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-W-125	EZ-P-W-125	1/4"	25	200	46	8 1/2 x 18 3/8 x 17"
SHW-N-150	EZ-SHW-150	1/4"	50	200	64	10 1/4 x 21 1/4 x 19 1/2"
SHW-N-1100	EZ-SHW-1100	1/4"	100	200	84	10 1/4 x 25 1/2 x 19 1/2"

CM & DM SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- CM: Caddy Mount Hand Crank Hose Reel
- DM: Dolly Mount Hand Crank Hose Reel

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
112-3-100-CM	3/8"	100	4,000	18	18 1/2 x 14 3/4 x 13 1/8"
112-3-150-CM	3/8"	150	4,000	22	23 x 14 3/4 x 13 1/8"
117-4-225-CM	1/2"	225	4,000	28	23 x 18 1/2 x 18"
117-3-200-DM	3/8"	200	4,000	37	19 x 36 1/4 x 21"
117-4-225-DM	1/2"	225	4,000	39	23 1/2 x 36 1/4 x 21"



V100 SERIES

- Direct hand crank reel with solid one piece steel "U" shaped frame
- Direct connect port for vacuum hose with bullet cuffs
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage

MODEL	DESCRIPTION	VACUUM			APRX. LBS.	W x H x L
		INLET	CAP.	HP		
V-117H-835	Vacuum only, Direct Crank	1 1/2"-2" Cuff	35 of 1 1/2" Vac Hose	Less than 5HP	35	23 3/8 x 18 x 17"
V-117H-850	Vacuum only, Direct Crank	1 1/2"-2" Cuff	50 of 1 1/2" Vac Hose	5HP or more	38	23 3/8 x 18 x 17"

1175 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1175-6-50	Electric Motor Options Available	1"	1 7/16"	50	3,000	67	24 1/8 x 26 1/8 x 24"
1175-6-100		1"	1 7/16"	100	3,000	70	28 1/8 x 26 1/8 x 24"
1175-6-150		1"	1 7/16"	150	3,000	75	32 1/8 x 26 1/8 x 24"
1175-6-200		1"	1 7/16"	200	3,000	83	36 3/8 x 26 1/8 x 24"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

CHOICE OF MOTORS



CF-CN-001

WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS

