

Industrial

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP
for lead length positioning

VERSATILE GUIDE ARM adjusts to wall,
floor, ceiling & vehicle mounting

**EXTERNAL FLUID PATH WITH MACHINED FROM
SOLID BRASS 90° FULL-FLOW NPT SWIVEL** that
screws directly on 1" solid steel axle, for simple seal
maintenance and fast and easy hose installation


HIGH QUALITY STEEL CONSTRUCTION with our
durable CPC™ powder coat finish

HEAVY DUTY SPUN DISCS with rolled edges
for greater strength, made with first of it's
kind CNC robotic spin cell

**ENCLOSED FACTORY TUNED AND MATCHED
CARTRIDGE-STYLE SPRING MOTOR**, easily removed
for safe & convenient replacement

**HEAVY GAUGE 1/4" STEEL BASE & SUPPORT
POST** for maximum stability

DUAL AXLE SUPPORT WITH SUPER HUB™
increased reel strength for more demanding
applications - On SH and T Series only

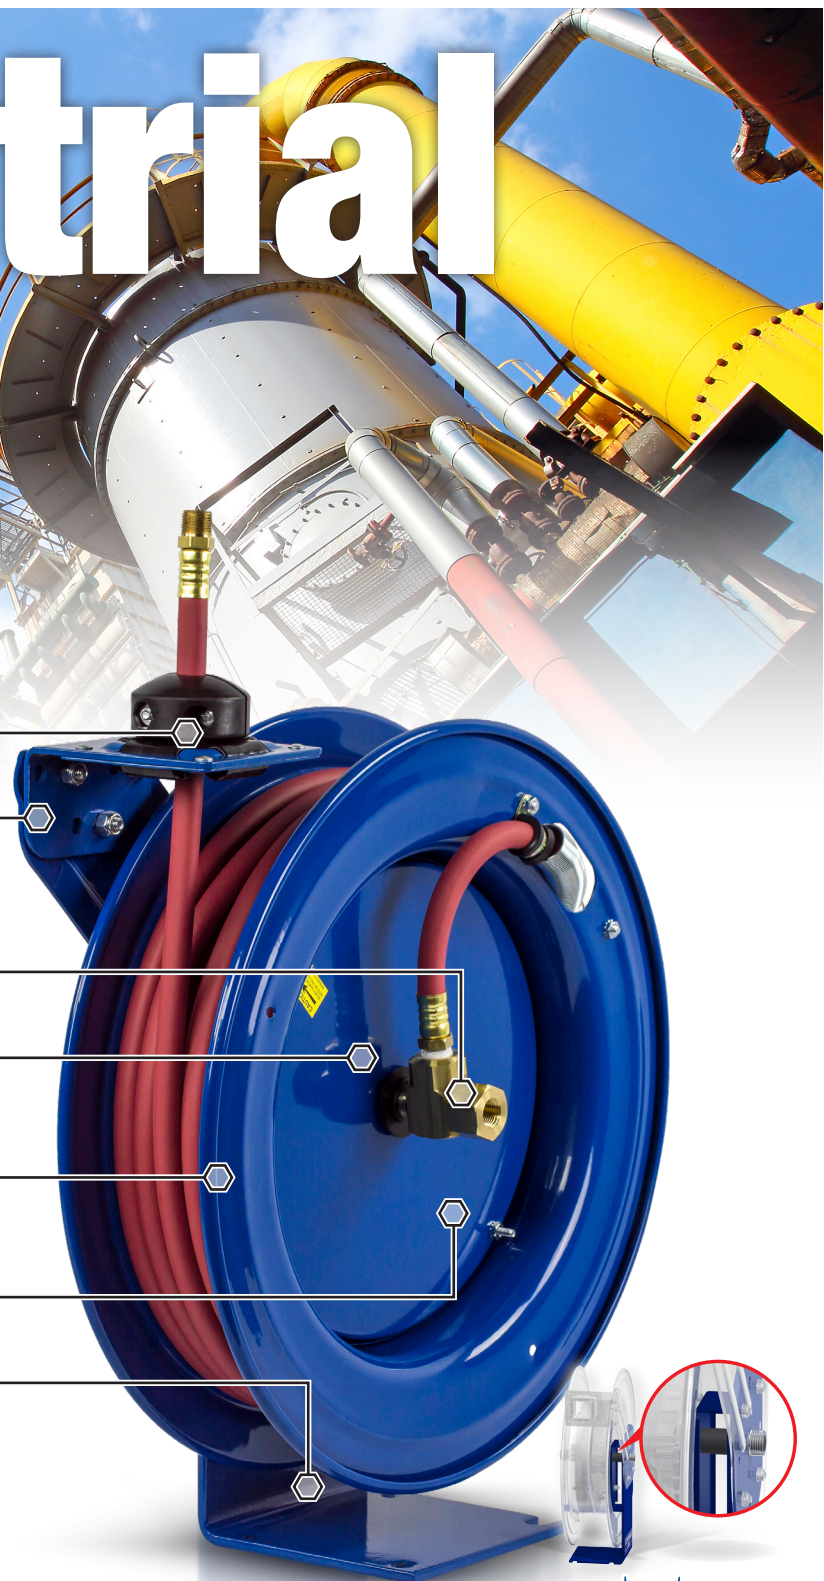

POSSIBLE FIELDS OF APPLICATION

- General Industrial
- Manufacturing Plants
- Air / Water Services
- Washdown
- Light Source
- Power Tools
- Bench Mount
- Tubing Applications



WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS





LG SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Compact & lightweight spring driven hose reel save space & facilitate workplace organization

| MODEL | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|-----------|------|-----|-----|------------|--------------------------|
| LG-LP-115 | 1/4" | 15 | 300 | 9 | 5 1/4 x 10 5/8 x 10 1/2" |
| LG-LP-125 | 1/4" | 25 | 300 | 11 | 5 1/4 x 10 5/8 x 10 1/2" |
| LG-LP-310 | 3/8" | 10 | 300 | 9 | 5 1/4 x 10 5/8 x 10 1/2" |
| LG-LP-320 | 3/8" | 20 | 300 | 11 | 5 1/4 x 10 5/8 x 10 1/2" |



P SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-----|------------|--------------------------|
| P-LP-125 | EZ-P-LP-125 | 1/4" | 25 | 300 | 27 | 5 7/8 x 14 7/8 x 13 1/2" |
| P-LP-150 | EZ-P-LP-150 | 1/4" | 50 | 300 | 40 | 6 3/4 x 18 5/8 x 17 1/8" |
| P-LP-325 | EZ-P-LP-325 | 3/8" | 25 | 300 | 28 | 6 1/2 x 14 7/8 x 13 1/2" |
| P-LP-350 | EZ-P-LP-350 | 3/8" | 50 | 300 | 43 | 6 3/4 x 18 5/8 x 17 1/8" |
| P-LP-425 | - | 1/2" | 25 | 300 | 44 | 7 x 18 5/8 x 17 1/8" |
| P-LP-450 | EZ-P-LP-450 | 1/2" | 50 | 300 | 48 | 7 x 18 5/8 x 17 1/8" |



SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-------|------------|--------------------------|
| SH-N-350 | EZ-SH-350 | 3/8" | 50 | 300 | 50 | 8 1/4 x 21 1/4 x 19 1/2" |
| SH-N-375 | EZ-SH-375 | 3/8" | 75 | 300 | 68 | 8 1/4 x 21 1/4 x 24" |
| SH-N-450 | EZ-SH-450 | 1/2" | 50 | 300 | 54 | 8 1/4 x 21 1/4 x 19 1/2" |
| SH-N-475 | EZ-TSH-475 | 1/2" | 75 | 300 | 68 | 8 3/4 x 25 1/2 x 24" |
| MP-N-350 | EZ-MP-350 | 3/8" | 50 | 3,000 | 65 | 8 1/4 x 21 1/4 x 19 1/2" |
| MP-N-450 | EZ-MP-450 | 1/2" | 50 | 2,500 | 67 | 8 3/4 x 25 1/2 x 19 1/2" |
| HP-N-150 | EZ-HP-150 | 1/4" | 50 | 5,000 | 64 | 8 3/4 x 25 1/2 x 19 1/2" |
| HP-N-350 | EZ-HP-350 | 3/8" | 50 | 4,000 | 65 | 9 1/4 x 25 1/2 x 19 1/2" |

Model Shown HP Series



1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

| MODEL | MOTOR OPTION | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------------------|------|-----|-------|------------|---------------------------|
| 1125-5-100 | Electric Motor Options Available | 3/4" | 100 | 3,000 | 42 | 26 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-175 | | 3/4" | 175 | 3,000 | 50 | 32 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-200 | | 3/4" | 200 | 3,000 | 55 | 38 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-250 | | 3/4" | 250 | 3,000 | 59 | 42 3/4 x 18 3/4 x 17 5/8" |
| 1125-6-50 | | 1" | 50 | 3,000 | 55 | 42 3/4 x 18 3/4 x 17 5/8" |
| 1125-6-100 | | 1" | 100 | 3,000 | 69 | 32 x 18 1/2 x 17 5/8" |

C SERIES - DUAL PURPOSE REELS - AIR/ELECTRIC

- Compact two spring driven reel assembly for air/electric applications, each reel operates independently
- Available in Air/Water dual purpose hose reel
- Choice of electrical accessories*

| MODEL | ACCESSORY | AWG / NO. COND. | CORD FT. | AMPS | APRX. LBS. | W x H x L |
|---------------|------------------------------|-----------------|----------|------|------------|-------------------|
| C-L350-5016-A | Single Industrial Receptacle | 16 / 3 | 50 | 13 | 94 | 16 x 18 5/8 x 17" |
| C-L350-5012-B | Quad Receptacle | 12 / 3 | 50 | 20 | 97 | 16 x 18 5/8 x 17" |
| C-L350-5016-C | Fluorescent Tube | 16 / 3 | 50 | 0.3 | 94 | 16 x 18 5/8 x 17" |
| C-L350-5016-D | Fluorescent Angle | 16 / 3 | 50 | 13 | 94 | 16 x 18 5/8 x 17" |
| C-L350-5016-E | Incandescent Light | 16 / 3 | 50 | 13 | 94 | 16 x 18 5/8 x 17" |
| C-L350-5012-F | Duplex G.F.C.I | 12 / 3 | 50 | 13 | 94 | 16 x 18 5/8 x 17" |

PC10 SERIES

- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Compact & lightweight spring driven cord reel save space & facilitate workplace organization

* Selection of electrical accessories

| MODEL | ACCESSORY | AWG / NO. COND. | CORD FT. | AMPS | APRX. LBS. | W x H x L |
|-------------|--------------------|-----------------|----------|------|------------|--------------------------|
| PC10-3012-A | Single receptacle | 12 / 3 | 30 | 20 | 17 | 7 3/8 x 10 5/8 x 10 1/2" |
| PC10-3016-A | Single receptacle | 16 / 3 | 30 | 13 | 14 | 7 3/8 x 10 5/8 x 10 1/2" |
| PC10-3012-B | Quad receptacle | 12 / 3 | 30 | 20 | 18 | 7 3/8 x 10 5/8 x 10 1/2" |
| PC10-3012-F | G.F.C.I receptacle | 12 / 3 | 30 | 20 | 19 | 7 3/8 x 10 5/8 x 10 1/2" |

CHOICE OF ELECTRICAL ACCESSORIES FOR PC10 & C



PC SERIES

- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization

* Selection of electrical accessories

| MODEL | EZ-Coil® Safety Line | ACCESSORY | AWG / NO. COND. | CORD FT. | AMPS | APRX. LBS. | W x H x L |
|-------------|----------------------|-------------------------|-----------------|----------|------|------------|--------------------------|
| PC13-5012-A | EZ-PC13-5012-A | Single receptacle | 12 / 3 | 50 | 20 | 40 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5012-B | EZ-PC13-5012-B | Quad receptacle | 12 / 3 | 50 | 20 | 41 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5016-C | EZ-PC13-5016-C | Fluorescent tube | 16 / 3 | 50 | 0.3 | 37 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5016-D | EZ-PC13-5016-D | Fluorescent angle light | 16 / 3 | 50 | 13 | 37 | 8 1/2 x 14 7/8 x 13 1/2" |

CHOICE OF ELECTRICAL ACCESSORIES



P-W & SHW SERIES

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Available in "T" Grade welding hose

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------|------|-----|-----|------------|---------------------------|
| P-W-125 | EZ-P-W-125 | 1/4" | 25 | 200 | 46 | 8 1/2 x 18 5/8 x 17" |
| SHW-N-150 | EZ-SHW-150 | 1/4" | 50 | 200 | 64 | 10 1/4 x 21 1/4 x 19 1/2" |
| SHW-N-1100 | EZ-SHW-1100 | 1/4" | 100 | 200 | 84 | 10 1/4 x 25 1/2 x 19 1/2" |

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

CF-GM-001