

Lubrication

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP for lead length positioning

VERSATILE GUIDE ARM adjusts to wall, floor, ceiling & vehicle mounting

EXTERNAL FLUID PATH WITH FULL FLOW BRASS NPT SWIVEL that screws directly on 1" solid steel axle, swivel is easily removed for fast, easy maintenance

HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES - not stamped, made with first of its kind CNC robotic spinning cell

HIGH QUALITY STEEL CONSTRUCTION with our durable CPC™ powder coat finish

ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR for safe and easy maintenance



Models equipped with **EZ-COIL**, Coxreels patented safety system retracts up to 80% slower than conventional reels

TRIPLE AXLE SUPPORT WITH SUPER HUB™ & A FULL FRAME increased reel strength for more demanding applications

Only on T Series. SH Series features dual axle support

POSSIBLE FIELDS OF APPLICATION

- Oil Dispensing System
- Grease Dispensing System
- Lube Skids, Trailers & Trucks
- Oil Savage/Waste Dispensing System
- Service/Mechanic/Utility Vehicles
- Automotive Service Center
- Quick Lube Service Center

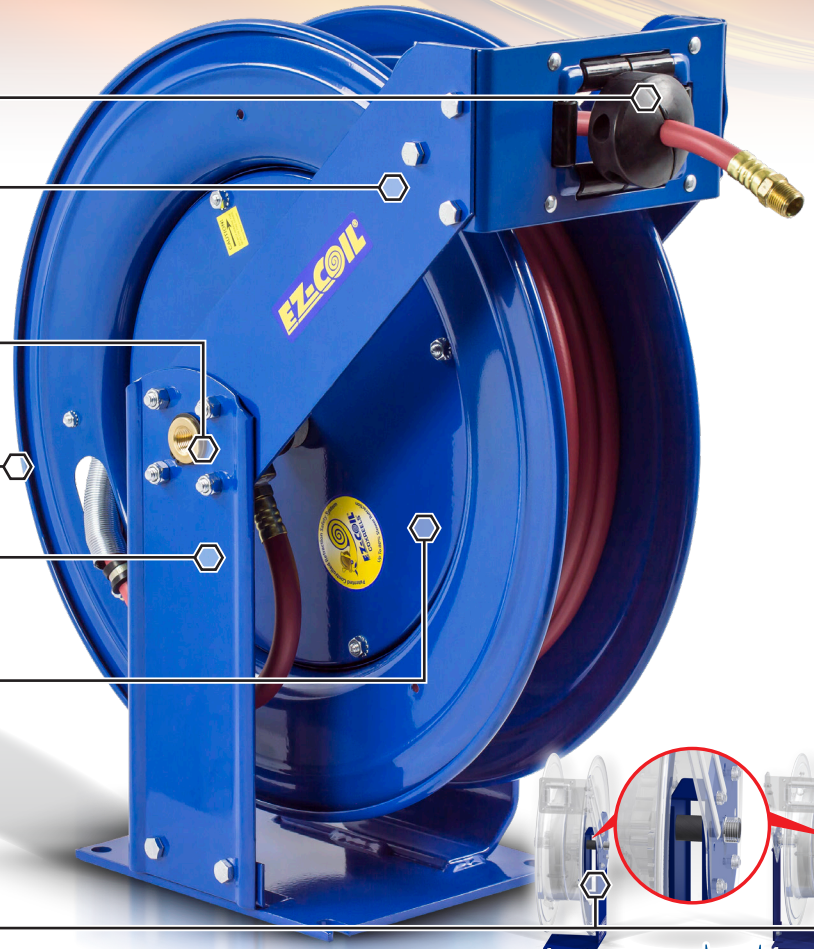

WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS





T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Built for rugged mobile applications
- Multi-position lock ratchet mechanism secures hose at desired length



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
TSH-N-350	EZ-TSH-350	3/8"	50	300	61	9 3/8 x 21 1/4 x 19 1/2"
TSH-N-375	EZ-TSH-375	3/8"	75	300	82	9 3/8 x 25 1/2 x 24"
TSH-N-3100	EZ-TSH-3100	3/8"	100	300	85	9 3/8 x 25 1/2 x 24"
TSH-N-450	EZ-TSH-450	1/2"	50	300	63	9 3/8 x 21 1/4 x 19 1/2"
TSH-N-475	EZ-TSH-475	1/2"	75	300	82	9 3/8 x 25 1/2 x 24"
TSH-N-4100	EZ-TSH-4100	1/2"	100	300	95	9 3/8 x 25 1/2 x 24"
TMP-N-350	EZ-TMP-350	3/8"	50	3,000	74	9 3/8 x 21 1/4 x 19 1/2"
TMP-N-375	EZ-TMP-375	3/8"	75	3,000	99	9 3/8 x 25 1/2 x 24"
TMP-N-3100	-	3/8"	100	3,000	106	9 3/8 x 25 1/2 x 24"
TMP-N-450	EZ-TMP-450	1/2"	50	2,500	77	9 3/8 x 21 1/4 x 19 1/2"
TMP-N-475	EZ-TMP-475	1/2"	75	2,500	100	9 3/8 x 25 1/2 x 24"
TMP-N-4100	-	1/2"	100	2,500	106	9 3/8 x 25 1/2 x 24"
TMP-N-550	EZ-TMP-550	3/4"	50	1,500	94	9 3/8 x 25 1/2 x 24"
TMP-N-575	-	3/4"	75	1,500	100	12 1/2 x 25 1/2 x 24"
TMP-N-650	-	1"	50	1,250	116	12 1/2 x 25 1/2 x 24"
THP-N-150	EZ-THP-150	1/4"	50	5,000	74	9 3/8 x 21 1/4 x 19 1/2"
THP-N-175	EZ-THP-175	1/4"	75	5,000	88	9 3/8 x 25 1/2 x 24"
THP-N-1100	EZ-THP-1100	1/4"	100	5,000	104	9 3/8 x 25 1/2 x 24"
THP-N-350	EZ-THP-350	3/8"	50	4,000	78	9 3/8 x 21 1/4 x 19 1/2"
THP-N-375	EZ-THP-375	3/8"	75	4,000	98	9 3/8 x 25 1/2 x 24"



P SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-125	EZ-P-LP-125	1/4"	25	300	27	5 7/8 x 14 7/8 x 13 1/2"
P-LP-150	EZ-P-LP-150	1/4"	50	300	40	6 3/4 x 18 5/8 x 17 1/8"
P-LP-325	EZ-P-LP-325	3/8"	25	300	28	6 1/2 x 14 7/8 x 13 1/2"
P-LP-350	EZ-P-LP-350	3/8"	50	300	43	6 3/4 x 18 5/8 x 17 1/8"
P-LP-425	-	1/2"	25	300	44	7 x 18 5/8 x 17 1/8"
P-LP-450	EZ-P-LP-450	1/2"	50	300	48	7 x 18 5/8 x 17 1/8"
P-MP-325	-	3/8"	25	3,000	49	7 x 18 5/8 x 17 1/8"
P-MP-425	EZ-P-MP-425	1/2"	25	2,500	49	7 x 18 5/8 x 17 1/8"
P-HP-125	EZ-P-HP-125	1/4"	25	5,000	48	7 x 18 5/8 x 17 1/8"
P-HP-325	EZ-P-HP-325	3/8"	25	4,000	49	7 x 18 5/8 x 17 1/8"



SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system
- HP Series Image Shown



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-350	EZ-SH-350	3/8"	50	300	50	8 1/4 x 21 1/4 x 19 1/2"
SH-N-375	EZ-SH-375	3/8"	75	300	68	8 1/4 x 21 1/4 x 24"
SH-N-450	EZ-SH-450	1/2"	50	300	54	8 1/4 x 21 1/4 x 19 1/2"
SH-N-475	EZ-TSH-475	1/2"	75	300	68	8 3/4 x 25 1/2 x 24"
MP-N-350	EZ-MP-350	3/8"	50	3,000	65	8 1/4 x 21 1/4 x 19 1/2"
MP-N-450	EZ-MP-450	1/2"	50	2,500	67	8 3/4 x 25 1/2 x 19 1/2"
HP-N-150	EZ-HP-150	1/4"	50	5,000	64	8 3/4 x 25 1/2 x 19 1/2"
HP-N-350	EZ-HP-350	3/8"	50	4,000	65	9 1/4 x 25 1/2 x 19 1/2"



SG SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Side mount design for vertical flat surface, cabinet or enclosed space mounts.

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SG13-L325	EZ-SG13-L325	3/8"	25	300	26	6 3/4 x 15 1/2 x 13 1/2"
SG17-L350	EZ-SG17-L350	3/8"	50	300	40	6 3/4 x 19 1/2 x 17"
SG17-L430	EZ-SG17-L430	1/2"	30	300	42	6 3/4 x 19 1/2 x 17"
SG19-L450	EZ-SG19-L450	1/2"	50	300	52	8 1/2 x 22 x 19 1/2"
SG19-M350	EZ-SG19-M350	3/8"	50	3,000	63	8 1/2 x 22 x 19 1/2"
SG19-M450	EZ-SG19-M450	1/2"	50	2,500	65	9 3/8 x 22 x 19 1/2"
SG19-H150	EZ-SG19-H150	1/4"	50	5,000	62	9 x 22 x 19 1/2"
SG19-H350	EZ-SG19-H350	3/8"	50	4,000	63	9 1/2 x 22 x 19 1/2"



E SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- Designed for expandable metal cabinets & multiple reel bank system

EXPANDABLE METAL CABINETS



- Unlimited expandability
- All steel access panel
- Cabinet constructed of 14 gauge steel with 4-roller non-sag hose guide system for reduced hose wear
- Mounting bracket is 3/16" bent steel, fits 3" to 8 1/2" flange on "I" or "H" beam
- Easy access for connection of air, water, oil & grease

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
E-LP-330	EZ-E-LP-330	3/8"	30	300	33	6 1/8 x 18 1/4 x 17 1/4"
E-LP-350	EZ-E-LP-350	3/8"	50	300	46	8 3/4 x 21 x 19 5/8"
E-LP-430	EZ-E-LP-430	1/2"	30	300	41	6 1/8 x 18 1/4 x 17 1/4"
E-LP-450	EZ-E-LP-450	1/2"	50	300	50	8 3/4 x 21 x 19 5/8"
E-MP-330	EZ-E-MP-330	3/8"	30	3,000	47	6 1/8 x 18 1/4 x 17 1/4"
E-MP-350	EZ-E-MP-350	3/8"	50	3,000	61	8 3/4 x 21 x 19 5/8"
E-MP-430	EZ-E-MP-430	1/2"	30	2,500	47	6 1/8 x 18 1/4 x 17 1/4"
E-MP-450	EZ-E-MH-450	1/2"	50	2,500	63	8 3/4 x 21 x 19 5/8"
E-HP-130	EZ-E-HP-130	1/4"	30	5,000	46	7 x 18 1/4 x 17 1/4"
E-HP-150	EZ-E-HP-150	1/4"	50	5,000	60	9 1/4 x 21 x 19 5/8"
E-HP-330	EZ-E-HP-330	3/8"	30	4,000	47	7 x 18 1/4 x 17 1/4"
E-HP-350	EZ-E-HP-350	3/8"	50	4,000	61	9 1/4 x 21 x 19 5/8"

PART NO.	DESCRIPTION	APRX. LBS.	W x H x L
1796-2	METAL CABINET: includes cabinet, access panel & mounting bracket	45	24 1/2 x 11 1/8 x 22 1/4"
1798-1	END PANELS: includes a set of two, all steel construction. Finished & caps the ends of each bank	8	-

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

CF-LU-001