

Pressure WASHING

PROFESSIONAL GRADE FEATURES



HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES - not stamped, made with first of its kind CNC robotic spinning cell

LOW PROFILE RISER & OPEN DRUM SLOT for smooth, even hose wraps

ZINC PLATED PLUMBING for applications requiring superior oxidation prevention
Only on 1/2" 1125 Series


INDUSTRIAL GRADE BRASS, machined from solid, full flow swivel with external fluid path for ease of seal maintenance

PERMANENTLY SEALED PILLOW BLOCK BEARINGS for smooth rotation

ONE PIECE ALL CNC ROBOTICALLY WELDED steel "A" frame construction

MOTORIZED VERSIONS:

The electric version features all of the same features found on the hand crank model plus **SOLID STEEL HALO** is welded to the disc for a direct gear driven motor

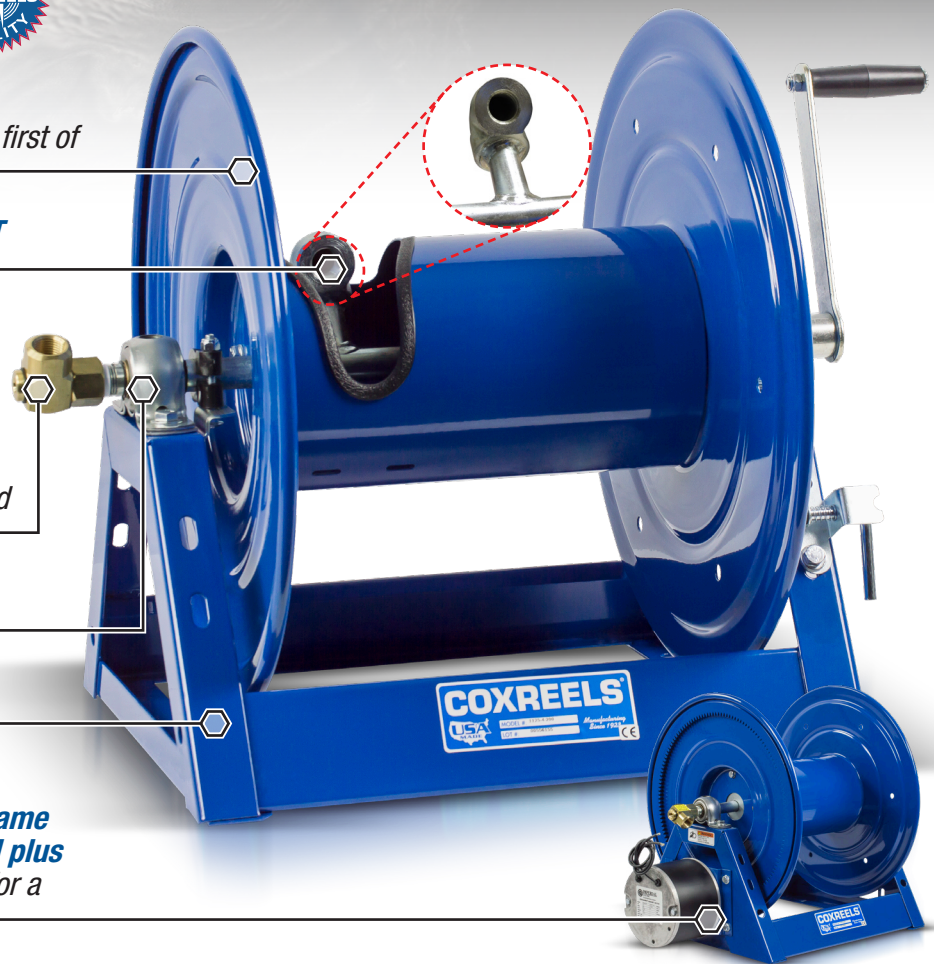

POSSIBLE FIELDS OF APPLICATION

- Pressure Washing
- High Pressure Spraying
- Water Blasting
- Ground Maintenance
- Power Wash
- Steam Cleaning
- Industrial Cleaning
- Water Jetting



WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS



Pressure Washing



1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser (Zinc plated on 1/2" models) & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

| MODEL | MOTOR OPTION | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------------------|------|-----|-------|------------|---------------------------|
| 1125-4-100 | Electric Motor Options Available | 1/2" | 100 | 3,000 | 36 | 19 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-200 | | 1/2" | 200 | 3,000 | 39 | 25 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-325 | | 1/2" | 325 | 3,000 | 48 | 31 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-500 | | 1/2" | 500 | 3,000 | 58 | 41 1/2 x 18 3/4 x 17 5/8" |
| 1125-5-100 | | 3/4" | 100 | 3,000 | 42 | 26 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-175 | | 3/4" | 175 | 3,000 | 50 | 32 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-200 | | 3/4" | 200 | 3,000 | 55 | 38 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-250 | | 3/4" | 250 | 3,000 | 59 | 42 3/4 x 18 3/4 x 17 5/8" |

HP 1125 SERIES

- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser (Zinc plated on 1/2" models) & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

| MODEL | MOTOR OPTION | I.D. | FT. | HP PSI | APRX. LBS. | W x H x L |
|--------------|----------------------------------|------|-----|--------|------------|---------------------------|
| HP1125-4-100 | Electric Motor Options Available | 1/2" | 100 | 5,000 | 36 | 19 1/2 x 18 3/4 x 17 5/8" |
| HP1125-4-200 | | 1/2" | 200 | 5,000 | 39 | 25 1/2 x 18 3/4 x 17 5/8" |
| HP1125-4-325 | | 1/2" | 325 | 5,000 | 48 | 31 1/2 x 18 3/4 x 17 5/8" |
| HP1125-4-500 | | 1/2" | 500 | 5,000 | 58 | 41 1/2 x 18 3/4 x 17 5/8" |
| HP1125-5-100 | | 3/4" | 100 | 5,000 | 42 | 26 3/4 x 18 3/4 x 17 5/8" |
| HP1125-5-175 | | 3/4" | 175 | 5,000 | 50 | 32 3/4 x 18 3/4 x 17 5/8" |
| HP1125-5-200 | | 3/4" | 200 | 5,000 | 55 | 38 3/4 x 18 3/4 x 17 5/8" |
| HP1125-5-250 | | 3/4" | 250 | 5,000 | 59 | 42 3/4 x 18 3/4 x 17 5/8" |

CHOICE OF MOTORS



100 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Solid one piece, heavy gauge steel "U" shaped frame
- Open drum design for no hassle hose wrap

| MODEL | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|-----------|------|-----|-------|------------|-------------------|
| 112-3-50 | 3/8" | 50 | 4,000 | 15 | 14 1/2 x 13 x 12" |
| 112-3-100 | 3/8" | 100 | 4,000 | 19 | 18 1/4 x 13 x 12" |
| 112-3-150 | 3/8" | 150 | 4,000 | 21 | 22 3/4 x 13 x 12" |
| 117-3-250 | 3/8" | 250 | 4,000 | 30 | 18 1/4 x 18 x 17" |
| 117-3-400 | 3/8" | 400 | 4,000 | 33 | 22 3/4 x 18 x 17" |
| 112-4-75 | 1/2" | 75 | 4,000 | 21 | 22 3/4 x 13 x 12" |
| 117-4-225 | 1/2" | 225 | 4,000 | 31 | 22 3/4 x 18 x 17" |
| 117-4-350 | 1/2" | 350 | 4,000 | 37 | 28 1/4 x 18 x 17" |

CM & DM SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- CM: Caddy Mount Hand Crank Hose Reel
- DM: Dolly Mount Hand Crank Hose Reel

| MODEL | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|--------------|------|-----|-------|------------|---------------------------|
| 112-3-100-CM | 3/8" | 100 | 4,000 | 18 | 18 1/2 x 14 3/4 x 13 1/8" |
| 112-3-150-CM | 3/8" | 150 | 4,000 | 22 | 23 x 14 3/4 x 13 1/8" |
| 117-4-225-CM | 1/2" | 225 | 4,000 | 28 | 23 x 18 1/2 x 18" |
| 117-3-200-DM | 3/8" | 200 | 4,000 | 37 | 19 x 36 1/4 x 21" |
| 117-4-225-DM | 1/2" | 225 | 4,000 | 39 | 23 1/2 x 36 1/4 x 21" |

SM SERIES AND OPTIONAL MOUNTING BRACKET

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®
- Forward-weighted design ensures rotation in direction of use

| MODEL | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|---------------------------------|-----|-------|------------|-------------------|
| SM12-3-100 | 3/8" | 100 | 4,000 | 15 | 19 x 13 1/2 x 12" |
| SM17-3-250 | 3/8" | 250 | 4,000 | 26 | 19 x 18 1/2 x 17" |
| SM17-4-125 | 1/2" | 125 | 4,000 | 26 | 19 x 18 1/2 x 17" |
| SMK-202 | SM Series Mounting Bracket | | | 8 | - |
| SMK-502 | SM Series Tube Mounting Bracket | | | 8 | - |

P SERIES

- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-------|------------|----------------------|
| P-HP-125 | EZ-P-HP-125 | 1/4" | 25 | 5,000 | 48 | 7 x 18 5/8 x 17 1/8" |
| P-HP-325 | EZ-P-HP-325 | 1/4" | 50 | 4,000 | 49 | 7 x 18 5/8 x 17 1/8" |

HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-------|------------|--------------------------|
| HP-N-150 | EZ-HP-150 | 1/4" | 50 | 5,000 | 64 | 8 3/4 x 25 1/2 x 19 1/2" |
| HP-N-350 | EZ-HP-350 | 3/8" | 50 | 4,000 | 65 | 9 1/4 x 25 1/2 x 19 1/2" |

T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------|------|-----|-------|------------|--------------------------|
| THP-N-150 | EZ-THP150 | 1/4" | 50 | 5,000 | 74 | 9 3/8 x 21 1/4 x 19 1/2" |
| THP-N-1100 | EZ-THP-1100 | 1/4" | 100 | 5,000 | 104 | 9 3/8 x 25 1/2 x 24" |
| THP-N-350 | EZ-THP-350 | 3/8" | 50 | 4,000 | 78 | 9 3/8 x 21 1/4 x 19 1/2" |
| THP-N-375 | EZ-THP-375 | 3/8" | 75 | 4,000 | 98 | 9 3/8 x 25 1/2 x 24" |

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
 TEMPE, AZ 85283

800.COX.REEL
 480.820.6396

#COXREELS



CF-PW-001