

COXREELS® EZ-SD "Static Discharge" cable reels are built heavy duty and designed for long lasting performance. They are specifically design to be used in combustible environments where the static buildup could ignite a spark and subsequent explosion. Static discharge or grounding reels are commonly paired with fuel hose reels found on page 16.



EZ-SD SERIES

CABLE				LESS CABLE		SIZE INDEX
MODEL	FT.	O.D.	APRX. LBS.	MODEL	APRX. LBS.	
GALVANIZED CABLE						
EZ-SD-35	35	5/32"	18	-	-	1
EZ-SD-50	50	5/32"	20	EZ-SDL-50	18	1
EZ-SD-75	75	5/32"	31	-	-	2
EZ-SD-100	100	5/32"	32	EZ-SDL-100	28	2
STAINLESS STEEL CABLE						
EZ-SD-35-1	35	5/32"	18	-	-	1
EZ-SD-50-1	50	5/32"	20	EZ-SDL-50	18	1
EZ-SD-75-1	75	5/32"	31	-	-	2
EZ-SD-100-1	100	5/32"	32	EZ-SDL-100	28	2

REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	N
1	37/8"	11 1/2"	11"	2 1/2"	6"	4"
2	4"	15"	14 1/2"	2 1/2"	6"	4"

Overall Dimensions

Base

Mounting Pattern

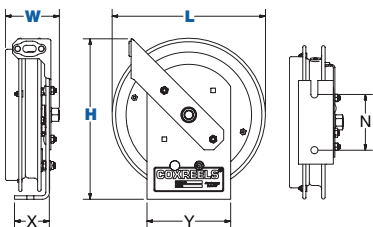

EZ-SD SERIES :: REEL SPECIFICATIONS

STATIC DISCHARGE

- Available with 7 strand x 7 wire galvanized steel or stainless steel cable
- High visibility, orange, vinyl cable cover
- Includes cable, ball stop & 50 Amp grounding clamp (100 Amp copper grounding clamp available, consult factory)

DESIGN & STRUCTURE

- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Commonly paired with fuel reels & used in combustible environment for grounding purposes
- Guide arm adjusts to wall, floor, vehicle, & overhead positions
- Solid one piece, heavy gauge 1/4" steel base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Bottom of base is un-powder coated to ground reel

EZ-COIL RETRACTION

- **OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS**
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position non-sparking lock ratchet mechanism secures cable at desired length

TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 17 FOR ADDITIONAL ACCESSORIES



ORDER 100 AMP CLAMP

Heavy duty copper clamp designed for heavy grounding requirements. It has a jaw opening of 1.06" and a steel spring.



ORDER DOUBLE CLAMP

Heavy duty clamps made from zinc plated steel. Both clamps are rated for 50 amp. Each has a jaw opening of 1.06" and a steel spring.



WARNING: Cancer and reproductive Harm – See page 19 for more information – www.P65Warning.ca.gov