

Industrial

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP
for lead length positioning

VERSATILE GUIDE ARM adjusts to wall,
floor, ceiling & vehicle mounting

**EXTERNAL FLUID PATH WITH MACHINED FROM
SOLID BRASS 90° FULL-FLOW NPT SWIVEL** that
screws directly on 1" solid steel axle, for simple seal
maintenance and fast and easy hose installation


HIGH QUALITY STEEL CONSTRUCTION with our
durable CPC™ powder coat finish

HEAVY DUTY SPUN DISCS with rolled edges
for greater strength, made with first of it's
kind CNC robotic spin cell

**ENCLOSED FACTORY TUNED AND MATCHED
CARTRIDGE-STYLE SPRING MOTOR**, easily removed
for safe & convenient replacement

**HEAVY GAUGE 1/4" STEEL BASE & SUPPORT
POST** for maximum stability

DUAL AXLE SUPPORT WITH SUPER HUB™
increased reel strength for more demanding
applications - On SH and T Series only

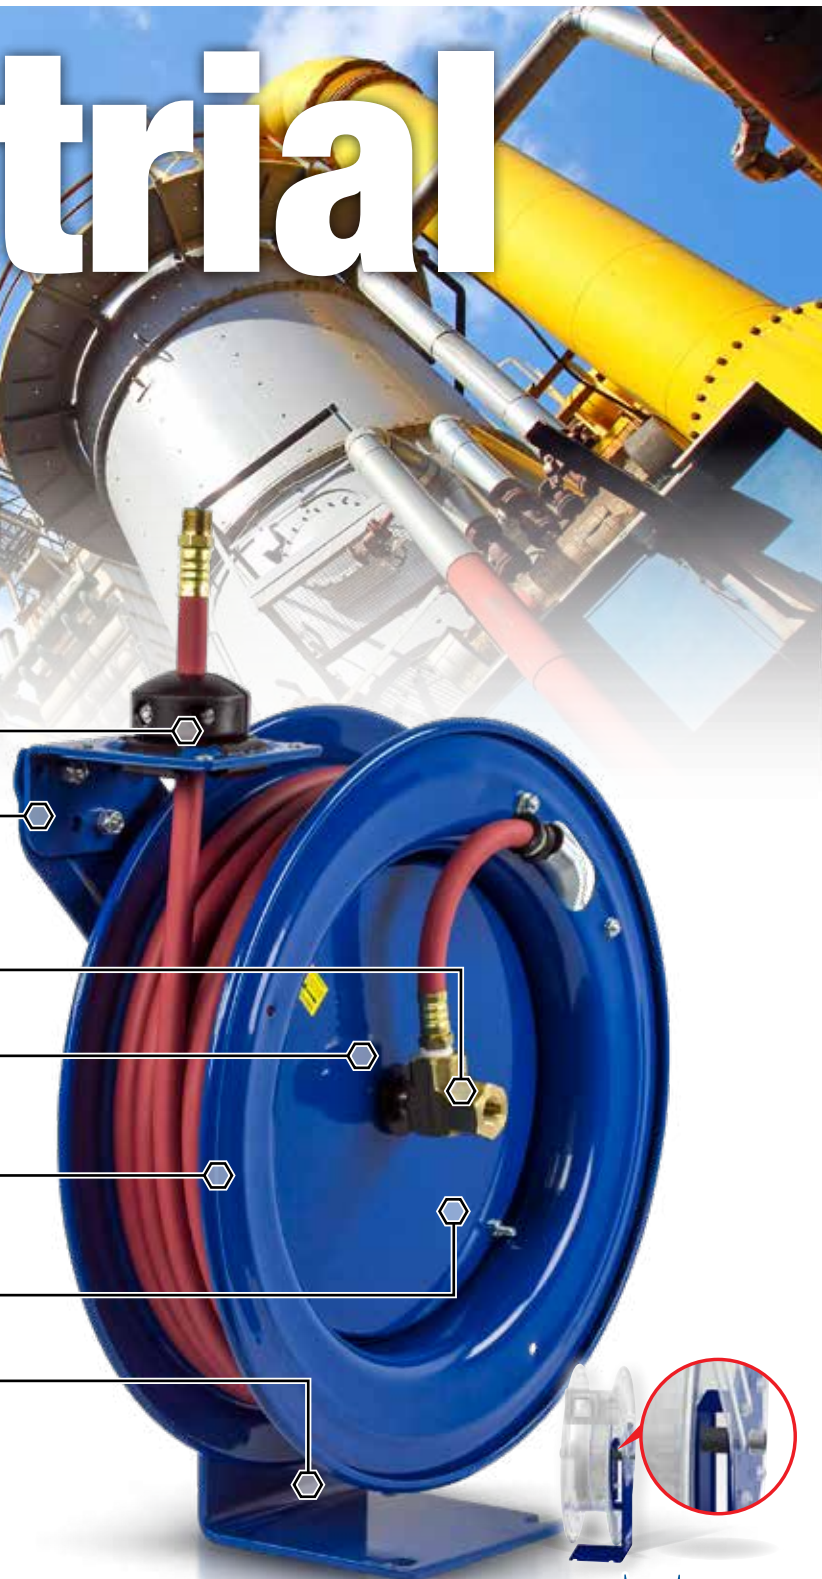

POSSIBLE FIELDS OF APPLICATION

- General Industrial
- Manufacturing Plants
- Air / Water Services
- Washdown
- Light Source
- Power Tools
- Bench Mount
- Tubing Applications



WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS



LG SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Compact & lightweight spring driven hose reel save space & facilitate workplace organization

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
LG-LP-115	1/4"	15	300	9	5 1/4 x 10 5/8 x 10 1/2"
LG-LP-125	1/4"	25	300	11	5 1/4 x 10 5/8 x 10 1/2"
LG-LP-310	3/8"	10	300	9	5 1/4 x 10 5/8 x 10 1/2"
LG-LP-320	3/8"	20	300	11	5 1/4 x 10 5/8 x 10 1/2"

P SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-125	EZ-P-LP-125	1/4"	25	300	27	5 7/8 x 14 7/8 x 13 1/2"
P-LP-150	EZ-P-LP-150	1/4"	50	300	40	6 3/4 x 18 5/8 x 17 1/8"
P-LP-325	EZ-P-LP-325	3/8"	25	300	28	6 1/2 x 14 7/8 x 13 1/2"
P-LP-350	EZ-P-LP-350	3/8"	50	300	43	6 3/4 x 18 5/8 x 17 1/8"
P-LP-425	-	1/2"	25	300	44	7 x 18 5/8 x 17 1/8"
P-LP-450	EZ-P-LP-450	1/2"	50	300	48	7 x 18 5/8 x 17 1/8"

SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system



Model Shown HP Series

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-350	EZ-SH-350	3/8"	50	300	50	8 1/4 x 21 1/4 x 19 1/2"
SH-N-375	EZ-SH-375	3/8"	75	300	68	8 1/4 x 21 1/4 x 24"
SH-N-450	EZ-SH-450	1/2"	50	300	54	8 1/4 x 21 1/4 x 19 1/2"
SH-N-475	EZ-TSH-475	1/2"	75	300	68	8 3/4 x 25 1/2 x 24"
MP-N-350	EZ-MP-350	3/8"	50	3,000	65	8 1/4 x 21 1/4 x 19 1/2"
MP-N-450	EZ-MP-450	1/2"	50	2,500	67	8 3/4 x 25 1/2 x 19 1/2"
HP-N-150	EZ-HP-150	1/4"	50	5,000	64	8 3/4 x 25 1/2 x 19 1/2"
HP-N-350	EZ-HP-350	3/8"	50	4,000	65	9 1/4 x 25 1/2 x 19 1/2"

1125 SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-5-100	Electric Motor Options Available	3/4"	100	3,000	42	26 3/4 x 18 3/4 x 17 5/8"
1125-5-175		3/4"	175	3,000	50	32 3/4 x 18 3/4 x 17 5/8"
1125-5-200		3/4"	200	3,000	55	38 3/4 x 18 3/4 x 17 5/8"
1125-5-250		3/4"	250	3,000	59	42 3/4 x 18 3/4 x 17 5/8"
1125-6-50		1"	50	3,000	55	42 3/4 x 18 3/4 x 17 5/8"
1125-6-100		1"	100	3,000	69	32 x 18 1/2 x 17 5/8"

C SERIES - DUAL PURPOSE REELS - AIR/ELECTRIC



- Compact two spring driven reel assembly for air/electric applications, each reel operates independently
- Available in Air/Water dual purpose hose reel
- Choice of electrical accessories*

MODEL	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
C-L350-5016-A	Single Industrial Receptacle	16 / 3	50	13	94	16 x 18 5/8 x 17"
C-L350-5012-B	Quad Receptacle	12 / 3	50	20	97	16 x 18 5/8 x 17"
C-L350-5016-C	Fluorescent Tube	16 / 3	50	0.3	94	16 x 18 5/8 x 17"
C-L350-5016-D	Fluorescent Angle	16 / 3	50	13	94	16 x 18 5/8 x 17"
C-L350-5016-E	Incandescent Light	16 / 3	50	13	94	16 x 18 5/8 x 17"
C-L350-5012-F	Duplex G.F.C.I	12 / 3	50	13	94	16 x 18 5/8 x 17"

PC10 SERIES



- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Compact & lightweight spring driven cord reel save space & facilitate workplace organization

* Selection of electrical accessories

MODEL	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
PC10-3012-A	Single receptacle	12 / 3	30	20	17	7 3/8 x 10 5/8 x 10 1/2"
PC10-3016-A	Single receptacle	16 / 3	30	13	14	7 3/8 x 10 5/8 x 10 1/2"
PC10-3012-B	Quad receptacle	12 / 3	30	20	18	7 3/8 x 10 5/8 x 10 1/2"
PC10-3012-F	G.F.C.I receptacle	12 / 3	30	20	19	7 3/8 x 10 5/8 x 10 1/2"

CHOICE OF ELECTRICAL ACCESSORIES FOR PC10 & C



PC SERIES



- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization

* Selection of electrical accessories

MODEL	EZ-Coil® Safety Line	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
PC13-5012-A	EZ-PC13-5012-A	Single receptacle	12 / 3	50	20	40	8 1/2 x 14 7/8 x 13 1/2"
PC13-5012-B	EZ-PC13-5012-B	Quad receptacle	12 / 3	50	20	41	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-C	EZ-PC13-5016-C	Fluorescent tube	16 / 3	50	0.3	37	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-D	EZ-PC13-5016-D	Fluorescent angle light	16 / 3	50	13	37	8 1/2 x 14 7/8 x 13 1/2"

CHOICE OF ELECTRICAL ACCESSORIES



P-W & SHW SERIES



- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Available in "T" Grade welding hose

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-W-125	EZ-P-W-125	1/4"	25	200	46	8 1/2 x 18 5/8 x 17"
SHW-N-150	EZ-SHW-150	1/4"	50	200	64	10 1/4 x 21 1/4 x 19 1/2"
SHW-N-1100	EZ-SHW-1100	1/4"	100	200	84	10 1/4 x 25 1/2 x 19 1/2"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

CF-GM-001