

Military & GOVERNMENT

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE TO STOP
for lead length positioning

VERSATILE GUIDE ARM adjusts to wall,
floor, ceiling & vehicle mounting

**HEAVY DUTY SOLID SPUN DISCS WITH ROLLED
EDGES** - not stamped, for greater strength, made
with first of its kind CNC robotic spinning cell


**EXTERNAL FLUID PATH WITH FULL FLOW BRASS
NPT SWIVEL** that screws directly on 1" solid
steel axle, swivel is easily removed for fast,
easy maintenance

HIGH QUALITY STEEL CONSTRUCTION
with our durable CPC™ powder coat finish

**ENCLOSED FACTORY TUNED AND MATCHED
CARTRIDGE-STYLE SPRING MOTOR** for safe
and easy maintenance. Models equipped
with **EZ-COIL**, Coxreels patented safety
system, retracts up to 80% slower than
conventional reels

**TRIPLE AXLE SUPPORT WITH SUPER HUB™ &
A FULL FRAME** increased reel strength for more
demanding applications

Only on T Series. SH Series features dual axle support

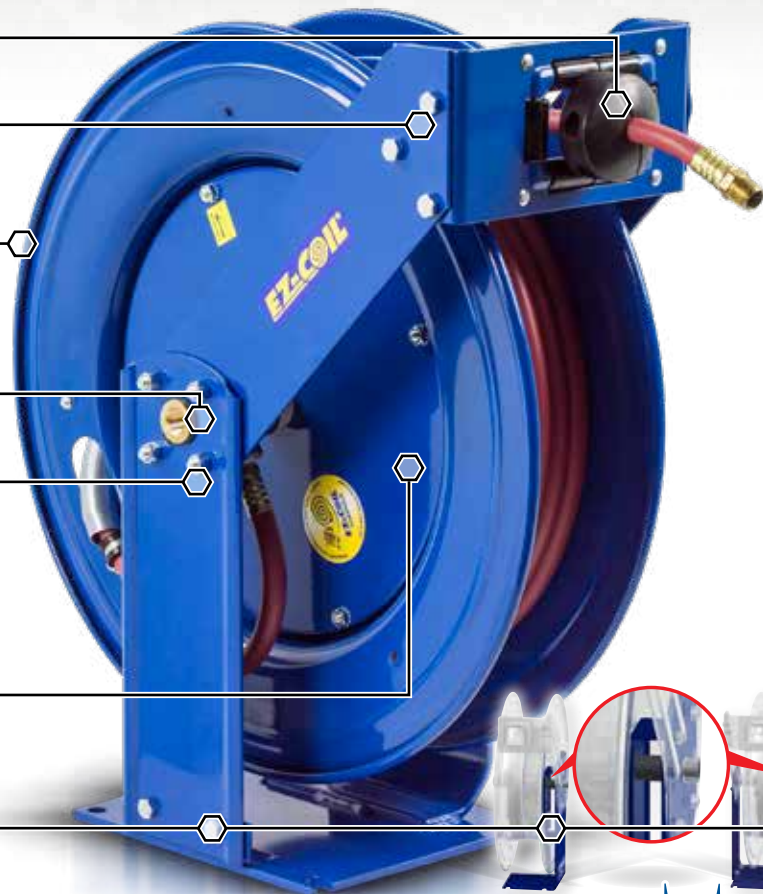

POSSIBLE FIELDS OF APPLICATION

- Pneumatic Tools
- Welding
- Aircraft Maintenance
- Power Tools
- Firefighting & Rescue
- Vehicle Maintenance
- Lubrication / Refueling
- Ground Maintenance
- Ship Maintenance



WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS



Military & Government



P SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-125	EZ-P-LP-125	1/4"	25	300	27	5 7/8 x 14 7/8 x 13 1/2"
P-LP-150	EZ-P-LP-150	1/4"	50	300	40	6 3/4 x 18 5/8 x 17 1/8"
P-LP-325	EZ-P-LP-325	3/8"	25	300	28	6 1/2 x 14 7/8 x 13 1/2"
P-LP-350	EZ-P-LP-350	3/8"	50	300	43	6 3/4 x 18 5/8 x 17 1/8"
P-LP-425	-	1/2"	25	300	44	7 x 18 5/8 x 17 1/8"
P-LP-450	EZ-P-LP-450	1/2"	50	300	48	7 x 18 5/8 x 17 1/8"



T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Available in Medium / High Pressure



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
TSH-N-350	EZ-TSH-350	3/8"	50	300	61	9 5/8 x 21 1/4 x 19 1/2"
TSH-N-3100	EZ-TSH-3100	3/8"	100	300	85	9 5/8 x 25 1/2 x 24"
TSH-N-450	EZ-TSH-450	1/2"	50	300	63	9 5/8 x 21 1/4 x 19 1/2"
TSH-N-4100	EZ-TSH-4100	1/2"	100	300	95	9 5/8 x 25 1/2 x 24"
TSH-N-550	EZ-TSH-550	3/4"	50	300	83	9 7/8 x 25 1/2 x 24"
TSH-N-575	-	3/4"	75	300	93	12 x 25 1/2 x 24"
TSH-N-635	-	1"	35	300	92	10 x 25 1/2 x 24"
TSH-N-650	-	1"	50	300	98	12 x 25 1/2 x 24"



SP SERIES

- External fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Reel features a sturdy box-style frame design. Reel adjusts to wall, floor, vehicle & overhead position
- Long lasting self-lubricated flange bearings for smooth rotation
- Available in Medium Pressure

* Supplied with fuel hose

MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
SLPL-4100	1/2"	3/4"	100	300	96	18 1/2 x 20 1/2 x 22 7/8"
SLPL-550	3/4"	1 1/16"	50	300	86	19 5/8 x 20 1/2 x 22 7/8"
SLPF-550*	3/4"	1 1/16"	50	300	107	19 5/8 x 20 1/2 x 22 7/8"
SLPL-575	3/4"	1 1/16"	75	300	117	19 5/8 x 24 1/2 x 26 3/8"
SLPL-650	1"	1 1/2"	50	300	109	19 5/8 x 24 1/2 x 26 3/8"
SLPF-650*	1"	1 1/2"	50	300	142	19 5/8 x 24 1/2 x 26 3/8"
SLPL-675	1"	1 1/2"	75	300	148	21 x 28 1/2 x 30 3/8"
SLPL-750	1 1/2"	1 13/16"	50	250	123	18 x 28 1/2 x 30 3/8"
SLPL-850	1 1/2"	2 1/16"	50	250	138	20 x 28 1/2 x 30 3/8"



FUEL HOSE T SERIES

- Machined from solid brass 90° full-flow NPT swivel inlet for fuel dispensing applications. Electroless nickel plated steel swivel on 1" models
- Swivel Seals: NITRILE
- Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil & heating oil.

MODEL	EZ-Coil® Safety Line	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
TSHF-N-550	EZ-TSHF-550	3/4"	1 3/16"	50	300	91	10 x 25 1/2 x 24"
TSHF-N-575	-	3/4"	1 3/16"	75	300	105	12 x 25 1/2 x 24"
TSHF-N-635	-	1"	1 1/2"	35	300	95	9 7/8 x 21 7/8 x 20 3/8"
TSHF-N-650	-	1"	1 1/2"	50	300	101	12 x 25 1/2 x 24"

SD & SDH SERIES

- Available with 7 strand x 7 wire galvanized steel or stainless steel cable
- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Suffix models with -1 for stainless steel cable

MODEL	EZ-Coil® Safety Line	I.D.	O.D.	FT.	APRX. LBS.	W x H x L
SD-35	EZ-SD-35	5/32"	3/4"	35	18	3 7/8 x 11 1/2 x 11"
SD-50	EZ-SD-50	5/32"	5/8"	50	20	3 7/8 x 11 1/2 x 11"
SD-75	EZ-SD-75	5/32"	7/8"	75	31	4 x 15 x 14 1/2"
SD-100	EZ-SD-100	5/32"	1"	100	32	4 x 15 x 14 1/2"
SDH-100	-	5/32"	1"	100	24	5 3/4 x 11 1/2 x 11"
SDH-200	-	5/32"	1"	200	28	5 3/4 x 11 1/2 x 11"

1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure
- Stainless steel construction available

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-4-100	Electric Motor Options Available	1/2"	100	3,000	36	19 1/2 x 18 3/4 x 17 5/8"
1125-4-200		1/2"	200	3,000	39	25 1/2 x 18 3/4 x 17 5/8"
1125-4-325		1/2"	325	3,000	48	31 1/2 x 18 3/4 x 17 5/8"
1125-4-500		1/2"	500	3,000	58	41 1/2 x 18 3/4 x 17 5/8"
1125-5-100		3/4"	100	3,000	42	26 3/4 x 18 3/4 x 17 5/8"
1125-5-175		3/4"	175	3,000	50	32 3/4 x 18 3/4 x 17 5/8"
1125-5-200		3/4"	200	3,000	55	38 3/4 x 18 3/4 x 17 5/8"
1125-5-250		3/4"	250	3,000	59	42 3/4 x 18 3/4 x 17 5/8"
1125-6-100		1"	100	3,000	69	44 1/2 x 18 1/2 x 17 5/8"

1175 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap.
- Stainless steel construction available

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1175-6-50	Electric Motor Options Available	1"	1 7/16"	50	3,000	67	24 1/8 x 26 1/8 x 24"
1175-6-100		1"	1 7/16"	100	3,000	70	28 1/8 x 26 1/8 x 24"
1175-6-150		1"	1 7/16"	150	3,000	75	32 1/8 x 26 1/8 x 24"
1175-6-200		1"	1 7/16"	200	3,000	83	36 5/8 x 26 1/8 x 24"

1185 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap.

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1185-1124	Electric Motor Options Available	1 1/2"	2 1/16"	50	600	76	25 x 26 x 24"
1185-1524		1 1/2"	2 1/16"	75	600	81	29 x 26 x 24"
1185-2024		1 1/2"	2 1/16"	100	600	94	33 1/8 x 26 x 24"
1185-2528		1 1/2"	2 1/16"	150	600	122	38 1/2 x 30 x 28"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

CHOICE OF MOTORS



CF-MG-001

WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS

