

Pest Control

PROFESSIONAL GRADE FEATURES



HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES - not stamped, made with first of its kind CNC robotic spinning cell

LOW PROFILE RISER & OPEN DRUM SLOT for smooth, even hose wraps

ZINC PLATED PLUMBING for applications requiring superior oxidation prevention
Only on 1/2" 1125 Series


INDUSTRIAL GRADE BRASS, machined from solid, full flow swivel with external fluid path for ease of seal maintenance

PERMANENTLY SEALED PILLOW BLOCK BEARINGS for smooth rotation

ONE PIECE ALL CNC ROBOTICALLY WELDED steel "A" frame construction

MOTORIZED VERSIONS:

The electric version features all of the same features found on the hand crank model plus **SOLID STEEL HALO** is welded to the disc for a direct gear driven motor

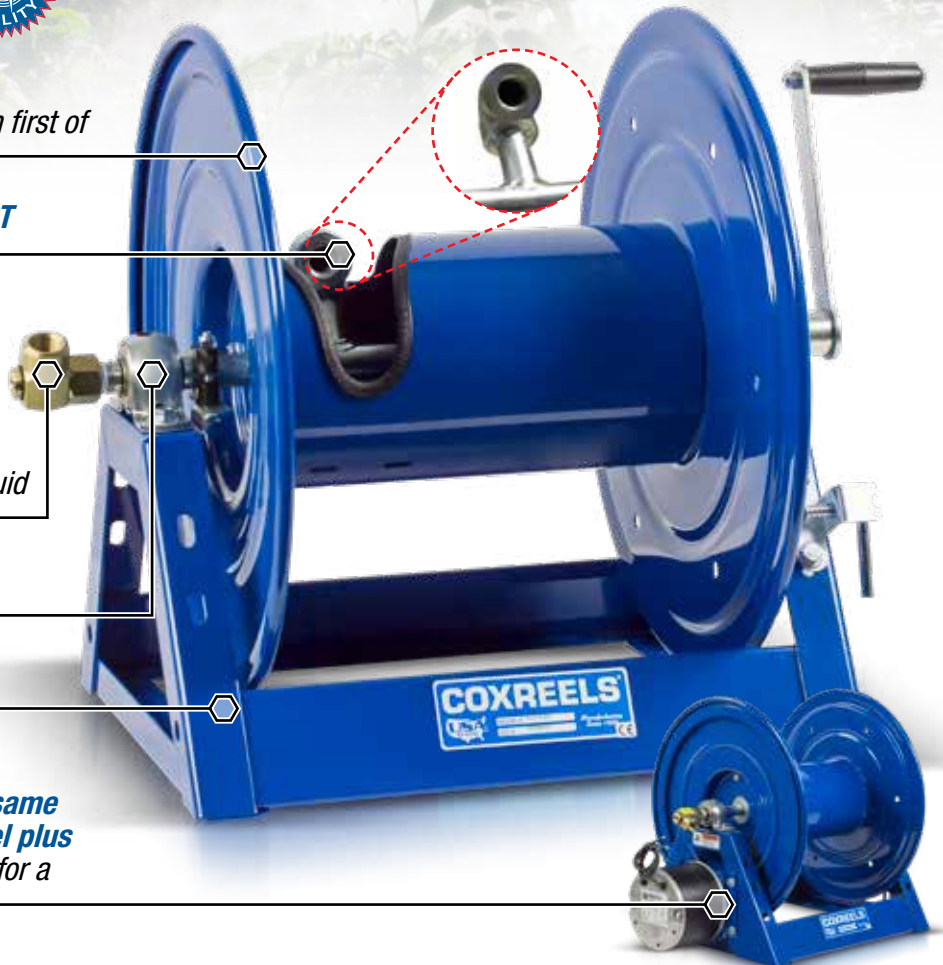

POSSIBLE FIELDS OF APPLICATION

- Pest Control
- Chemical Spraying
- Lawn Spraying
- Ground Maintenance
- Agricultural Spraying
- Skid Sprayer Units



WWW.COXREELS.COM
INFO@COXREELS.COM

5865 S. ASH AVE
TEMPE, AZ 85283

800.COX.REEL
480.820.6396

#COXREELS





1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure
- For Stainless Steel swivel with Viton® seals & fluid path add suffix "-BBXX"

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-4-100	Electric Motor Options Available	1/2"	100	3,000	36	19 1/2 x 18 3/4 x 17 5/8"
1125-4-200		1/2"	200	3,000	39	25 1/2 x 18 3/4 x 17 5/8"
1125-4-325		1/2"	325	3,000	48	31 1/2 x 18 3/4 x 17 5/8"
1125-4-500		1/2"	500	3,000	58	41 1/2 x 18 3/4 x 17 5/8"
1125-5-100		3/4"	100	3,000	42	26 3/4 x 18 3/4 x 17 5/8"
1125-5-175		3/4"	175	3,000	50	32 3/4 x 18 3/4 x 17 5/8"
1125-5-200		3/4"	200	3,000	55	38 3/4 x 18 3/4 x 17 5/8"
1125-5-250		3/4"	250	3,000	59	42 3/4 x 18 3/4 x 17 5/8"
1125-6-100		1"	100	3,000	69	44 1/2 x 18 1/2 x 17 5/8"

CHOICE OF MOTORS



1125-E SERIES

- Equipped with 1/3HP 12V DC electric motor
- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure
- A solid steel halo is welded to the disc for a direct gear driven motor.

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-4-100-E	1/2"	100	3,000	49	18 x 19 1/4 x 17 3/4"
1125-4-200-E	1/2"	200	3,000	52	24 x 19 1/4 x 17 3/4"
1125-4-325-E	1/2"	325	3,000	61	30 x 19 1/4 x 17 3/4"
1125-4-500-E	1/2"	500	3,000	71	40 x 19 1/4 x 17 3/4"
1125-5-100-E	3/4"	100	3,000	55	24 1/4 x 19 1/4 x 17 3/4"
1125-5-175-E	3/4"	175	3,000	63	30 1/4 x 19 1/4 x 17 3/4"
1125-5-200-E	3/4"	200	3,000	68	36 1/4 x 19 1/4 x 17 3/4"
1125-5-250-E	3/4"	250	3,000	72	40 1/4 x 19 1/4 x 17 3/4"
1125-6-100-E	1"	100	3,000	82	40 3/4 x 19 1/8 x 17 1/2"

ROLLER BRACKETS FOR USE WITH 1125 SERIES

- Specify drum width
- 4-way enclosed pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets
- 3-way open spool roller assembly with 1.5" chrome-plated machined steel spools and 1.5" stainless steel tubing bottom roller and powder coated steel brackets

PART NO.	DESCRIPTION	ADDED WEIGHT.
15353	4-way top rewind roller bracket	10
15358	4-way top rewind (ceiling mount) roller bracket	10
15354	4-way bottom rewind roller bracket	10
15353-P	4-way top rewind roller bracket	10
15359	3-way top rewind roller bracket	14
15362	3-way bottom rewind roller bracket	14

PORTABLE HOSE REEL CART FOR USE WITH 1125 SERIES

- Steel round handle detaches for compact storage. Steel front legs with rubber feet prevent sliding.
- High grade ball bearing with hardened cup.
- 1/2" diameter steel axle. Solid 8" rubber tires. For 8" semi-pneumatic tires order model #PRP.

PART NO.	DESCRIPTION	APRX. LBS.
PR-1125-6	Portable Cart to be used with 1125-4-100 & 1125-5-50	17
PR-1125-12	Portable Cart to be used with 1125-4-200	17

100 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Solid one piece, heavy gauge steel "U" shaped frame
- Open drum design for no hassle hose wrap

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
112-3-50	3/8"	50	4,000	15	14 1/2 x 13 x 12"
112-3-100	3/8"	100	4,000	19	18 1/4 x 13 x 12"
112-3-150	3/8"	150	4,000	21	22 3/4 x 13 x 12"
112-3-250	3/8"	250	4,000	30	18 1/4 x 18 x 17"
117-3-400	3/8"	400	4,000	33	22 3/4 x 18 x 17"
117-3-550	3/8"	550	4,000	35	28 1/4 x 18 x 17"
112-4-75	1/2"	75	4,000	21	22 3/4 x 13 x 12"
117-4-225	1/2"	225	4,000	31	22 3/4 x 18 x 17"
117-4-350	1/2"	350	4,000	37	28 1/4 x 18 x 17"
117-5-100	3/4"	100	4,000	35	23 1/4 x 18 x 17"

DM SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- High quality three piece 1-1/4" steel tube frame structure
- Solid 8" rubber tires for easy transport
- Rubber front feet prevent reel from slipping forward

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
117-3-200-DM	3/8"	200	4,000	37	19 x 36 1/4 x 21"
117-4-225-DM	1/2"	225	4,000	39	23 1/2 x 36 1/4 x 21"

CM SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- High quality three piece 1" steel tube frame structure
- Hose Control bar prevents hose from slipping off the discs

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
112-3-100-CM	3/8"	100	4,000	18	18 1/2 x 14 3/4 x 13 1/8"
112-3-150-CM	3/8"	150	4,000	22	23 x 14 3/4 x 13 1/8"
117-4-225-CM	1/2"	225	4,000	28	23 x 18 1/2 x 18"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.