

# Pressure WASHING

## PROFESSIONAL GRADE FEATURES



**HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES** - not stamped, made with first of its kind CNC robotic spinning cell

**LOW PROFILE RISER & OPEN DRUM SLOT** for smooth, even hose wraps

**ZINC PLATED PLUMBING** for applications requiring superior oxidation prevention  
Only on 1/2" 1125 Series


**INDUSTRIAL GRADE BRASS**, machined from solid, full flow swivel with external fluid path for ease of seal maintenance

**PERMANENTLY SEALED PILLOW BLOCK BEARINGS** for smooth rotation

**ONE PIECE ALL CNC ROBOTICALLY WELDED** steel "A" frame construction

### MOTORIZED VERSIONS:

The electric version features all of the same features found on the hand crank model plus **SOLID STEEL HALO** is welded to the disc for a direct gear driven motor

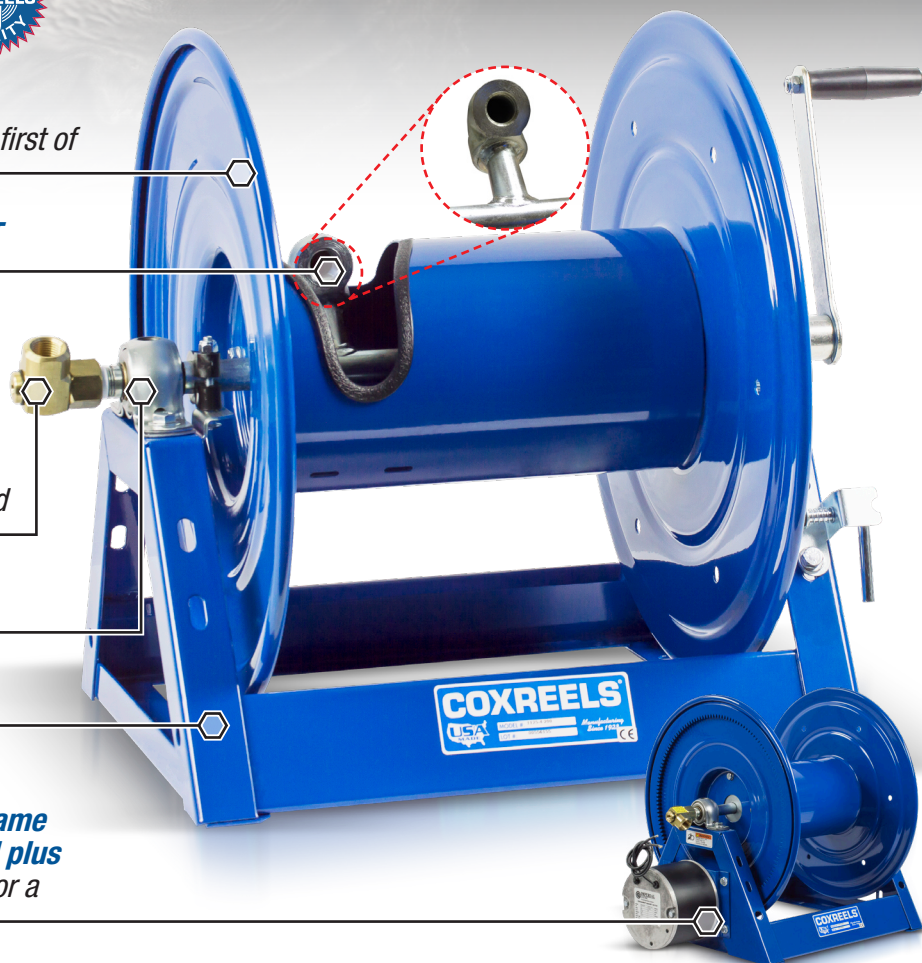

### POSSIBLE FIELDS OF APPLICATION

- Pressure Washing
- Ground Maintenance
- Industrial Cleaning
- High Pressure Spraying
- Power Wash
- Water Jetting
- Water Blasting
- Steam Cleaning



**WWW.COXREELS.COM**  
INFO@COXREELS.COM

5865 S. ASH AVE  
TEMPE, AZ 85283

800.COX.REEL  
480.820.6396

#COXREELS



# Pressure Washing



## 1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser (Zinc plated on 1/2" models) & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

| MODEL      | MOTOR OPTION                     | I.D. | FT. | PSI   | APRX. LBS. | W x H x L                 |
|------------|----------------------------------|------|-----|-------|------------|---------------------------|
| 1125-4-100 | Electric Motor Options Available | 1/2" | 100 | 3,000 | 36         | 19 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-200 |                                  | 1/2" | 200 | 3,000 | 39         | 25 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-325 |                                  | 1/2" | 325 | 3,000 | 48         | 31 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-500 |                                  | 1/2" | 500 | 3,000 | 58         | 41 1/2 x 18 3/4 x 17 5/8" |
| 1125-5-100 |                                  | 3/4" | 100 | 3,000 | 42         | 26 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-175 |                                  | 3/4" | 175 | 3,000 | 50         | 32 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-200 |                                  | 3/4" | 200 | 3,000 | 55         | 38 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-250 |                                  | 3/4" | 250 | 3,000 | 59         | 42 3/4 x 18 3/4 x 17 5/8" |

## HP 1125 SERIES

- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser (Zinc plated on 1/2" models) & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

| MODEL        | MOTOR OPTION                     | I.D. | FT. | HP PSI | APRX. LBS. | W x H x L                 |
|--------------|----------------------------------|------|-----|--------|------------|---------------------------|
| HP1125-4-100 | Electric Motor Options Available | 1/2" | 100 | 5,000  | 36         | 19 1/2 x 18 3/4 x 17 5/8" |
| HP1125-4-200 |                                  | 1/2" | 200 | 5,000  | 39         | 25 1/2 x 18 3/4 x 17 5/8" |
| HP1125-4-325 |                                  | 1/2" | 325 | 5,000  | 48         | 31 1/2 x 18 3/4 x 17 5/8" |
| HP1125-4-500 |                                  | 1/2" | 500 | 5,000  | 58         | 41 1/2 x 18 3/4 x 17 5/8" |
| HP1125-5-100 |                                  | 3/4" | 100 | 4,500  | 42         | 26 3/4 x 18 3/4 x 17 5/8" |
| HP1125-5-175 |                                  | 3/4" | 175 | 4,500  | 50         | 32 3/4 x 18 3/4 x 17 5/8" |
| HP1125-5-200 |                                  | 3/4" | 200 | 4,500  | 55         | 38 3/4 x 18 3/4 x 17 5/8" |
| HP1125-5-250 |                                  | 3/4" | 250 | 4,500  | 59         | 42 3/4 x 18 3/4 x 17 5/8" |

## CHOICE OF MOTORS

Option - A  
Air Motor  
4 GAST



Option - AB  
Air Motor  
6 GAST



Option - E & EF  
12V & 24V  
Motor



Option - EA, EB, ED & EJ  
Explosion Proof  
12V, 24V, 115V & 230V



Option - H  
Hydraulic  
Motor



## 100 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Solid one piece, heavy gauge steel "U" shaped frame
- Open drum design for no hassle hose wrap

| MODEL     | I.D. | FT. | PSI   | APRX. LBS. | W x H x L         |
|-----------|------|-----|-------|------------|-------------------|
| 112-3-50  | 3/8" | 50  | 4,000 | 15         | 14 1/2 x 13 x 12" |
| 112-3-100 | 3/8" | 100 | 4,000 | 19         | 18 1/4 x 13 x 12" |
| 112-3-150 | 3/8" | 150 | 4,000 | 21         | 22 3/4 x 13 x 12" |
| 117-3-250 | 3/8" | 250 | 4,000 | 30         | 18 1/4 x 18 x 17" |
| 117-3-400 | 3/8" | 400 | 4,000 | 33         | 22 3/4 x 18 x 17" |
| 112-4-75  | 1/2" | 75  | 4,000 | 21         | 22 3/4 x 13 x 12" |
| 117-4-225 | 1/2" | 225 | 4,000 | 31         | 22 3/4 x 18 x 17" |
| 117-4-350 | 1/2" | 350 | 4,000 | 37         | 28 1/4 x 18 x 17" |

## CM & DM SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- CM: Caddy Mount Hand Crank Hose Reel
- DM: Dolly Mount Hand Crank Hose Reel

| MODEL        | I.D. | FT. | PSI   | APRX. LBS. | W x H x L                 |
|--------------|------|-----|-------|------------|---------------------------|
| 112-3-100-CM | 3/8" | 100 | 4,000 | 18         | 18 1/2 x 14 3/4 x 13 1/8" |
| 112-3-150-CM | 3/8" | 150 | 4,000 | 22         | 23 x 14 3/4 x 13 1/8"     |
| 117-4-225-CM | 1/2" | 225 | 4,000 | 28         | 23 x 18 1/2 x 18"         |
| 117-3-200-DM | 3/8" | 200 | 4,000 | 37         | 19 x 36 1/4 x 21"         |
| 117-4-225-DM | 1/2" | 225 | 4,000 | 39         | 23 1/2 x 36 1/4 x 21"     |

## SM SERIES AND OPTIONAL MOUNTING BRACKET

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®
- Forward-weighted design ensures rotation in direction of use

| MODEL      | I.D.                            | FT. | PSI   | APRX. LBS. | W x H x L         |
|------------|---------------------------------|-----|-------|------------|-------------------|
| SM12-3-100 | 3/8"                            | 100 | 4,000 | 15         | 19 x 13 1/2 x 12" |
| SM17-3-250 | 3/8"                            | 250 | 4,000 | 26         | 19 x 18 1/2 x 17" |
| SM17-4-125 | 1/2"                            | 125 | 4,000 | 26         | 19 x 18 1/2 x 17" |
| SMK-202    | SM Series Mounting Bracket      |     |       | 8          | -                 |
| SMK-502    | SM Series Tube Mounting Bracket |     |       | 8          | -                 |

## P SERIES

- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization

| MODEL    | EZ-Coil® Safety Line | I.D. | FT. | PSI   | APRX. LBS. | W x H x L            |
|----------|----------------------|------|-----|-------|------------|----------------------|
| P-HP-125 | EZ-P-HP-125          | 1/4" | 25  | 5,000 | 48         | 7 x 18 5/8 x 17 1/8" |
| P-HP-325 | EZ-P-HP-325          | 1/4" | 50  | 4,000 | 49         | 7 x 18 5/8 x 17 1/8" |

## HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system

| MODEL    | EZ-Coil® Safety Line | I.D. | FT. | PSI   | APRX. LBS. | W x H x L                |
|----------|----------------------|------|-----|-------|------------|--------------------------|
| HP-N-150 | EZ-HP-150            | 1/4" | 50  | 5,000 | 64         | 8 3/4 x 25 1/2 x 19 1/2" |
| HP-N-350 | EZ-HP-350            | 3/8" | 50  | 4,000 | 65         | 9 1/4 x 25 1/2 x 19 1/2" |

## T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system

| MODEL      | EZ-Coil® Safety Line | I.D. | FT. | PSI   | APRX. LBS. | W x H x L                |
|------------|----------------------|------|-----|-------|------------|--------------------------|
| THP-N-150  | EZ-THP150            | 1/4" | 50  | 5,000 | 74         | 9 3/8 x 21 1/4 x 19 1/2" |
| THP-N-1100 | EZ-THP-1100          | 1/4" | 100 | 5,000 | 104        | 9 3/8 x 25 1/2 x 24"     |
| THP-N-350  | EZ-THP-350           | 3/8" | 50  | 4,000 | 78         | 9 3/8 x 21 1/4 x 19 1/2" |
| THP-N-375  | EZ-THP-375           | 3/8" | 75  | 4,000 | 98         | 9 3/8 x 25 1/2 x 24"     |

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

**WWW.COXREELS.COM**  
INFO@COXREELS.COM

5865 S. ASH AVE  
TEMPE, AZ 85283

800.COX.REEL  
480.820.6396

#COXREELS



CF-PW-001